

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80°C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 26 AWG 0.14 mm²
 Material: tinned copper strands
 Strand size: 0.16mm
 Resistance at 20 °C: 150 Ω /km max

Insulator

Material: PVC
 Color: black, white
 Diameter: ϕ 1.1 mm
 Nominal thickness: 0.28 mm
 Resistance at 20 °C: 10 MΩ /km min


Outer jacket

Material: PVC
 Color: black
 Diameter: ϕ 3.8±0.15 mm
 Nominal thickness: 0.76 mm

Wire marking: E339579 UL AWM STYLE 2464 26 AWG 80°C
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 LF TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ±1 °C /1 hour, no observed degradation
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ±2 °C /1 hour, no observed cracking

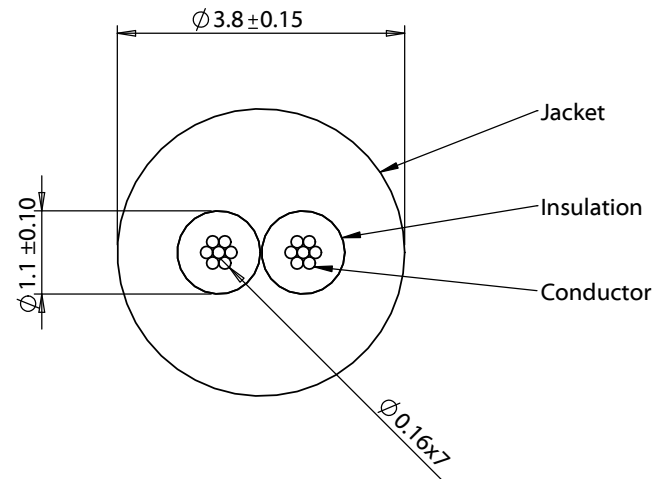

Revision:	Date:	Description:
A	06/24/2014	Initial release
A1	08/23/2018	Increased operating temperature range

Prepared: JP <small>Digitally signed by JP Date: 2018.09.05 14:42:41 -0700</small>
Verified: PS <small>Digitally signed by PS Date: 2018.09.05 15:00:43 -0700</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm

Notes: RoHS and REACH compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 2C TS, 26 AWG, UL2464, 300V, 80C, 3.8 mm, VW-1, PVC

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A	Part number: 30-00362
Scale: 10:1	

Sheet 1 of 1

5

4

3

2

1