

6

5

4

3



2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/22/21	
A		ADDED TOLERANCE	6/10/21	WX/AC
B		UPDATE LABEL	7/19/21	WX/AC

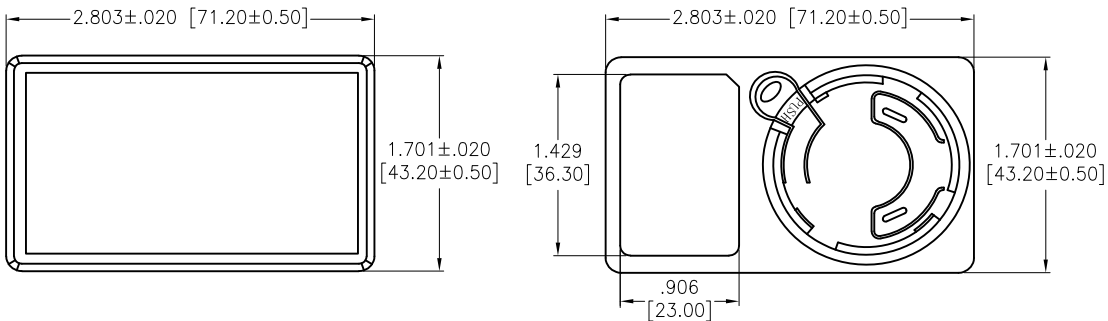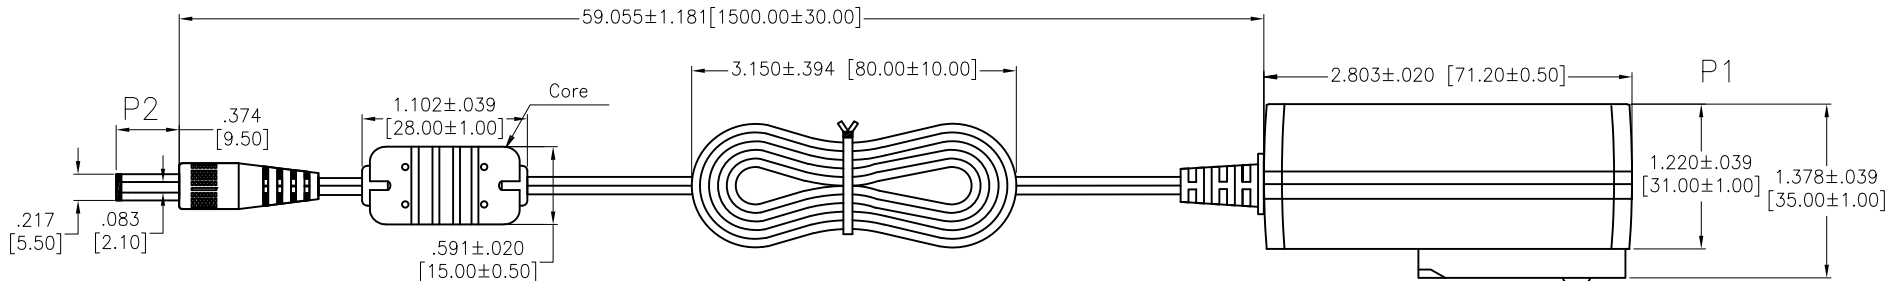

SPECIFICATIONS:

Connector

P1: Power Adapter, W/Strain

P2: DC Plug, W/Strain Relief, AC PIN: Brass Nickel plated 5.5*2.1*9.5mm
Overmold Color: Black PVC-45P

CABLE:

UL2468: 20AWG*2C 80°C, Jacket Color: Black

Electrical:

Input:

Voltage: 100Vac to 240Vac
Current: 1.5A Max. @ 100Vac input & max load
Frequency: 50Hz / 60Hz

Output:

Voltage: 9V
Current: 2.2A max.
Load Regulation: ±5%
Line Regulation: ±3%

Line Load Regulation-Output Rate: 9V, 2.2A

Insulation Resistance: 100 Mohms min @ 500VDC

Dielectric withstanding voltage (Hi-pot): 3,000V AC For 1 Minute

Leakage Current: 0.25mA max. @ 240V AC/50Hz


Temperature Rating:

Operating Temperature: 0°C to +45°C

Storage Temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

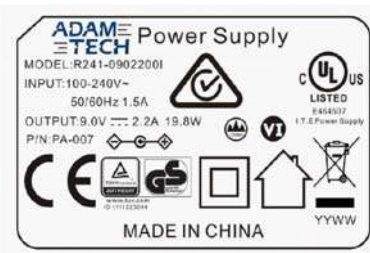

SEE SHT 2 OF 2 FOR PLUG TYPE OPTIONS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES		 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10	Ø.X ± .10		
.XX ± .020	Ø.XX ± .015	TITLE: POWER ADAPTER TO DC PLUG, COLOR BLACK 9 VOLT, 2.2AMP, UL2468 20AWG, 5.5X2.1X9.5MM	
.XXX ± .015	Ø.XXX ± .010	SIZE: X	PART NO.: PA-007-X
APPROVALS		REV. B	REF:
DRAWN: WX	DATE: 3/22/21	SCALE: NTS SHEET 1 OF 2	
CHECKED: AC	DATE: 3/22/21		
APPROVED:			

6

5

4

3

2

1

US (NEMA 1-15) P/N: PA-007-1

Dimensions: .669 [17.00], .502 [12.75], .197 [5.00], .362 [9.20], 1.571 [39.91], .057 [1.45], .248 [6.30], 1.303 [33.10], 1.569 [39.84]

AUSTRALIAN P/N: PA-007-4

Dimensions: .670 [17.00], .512 [13.00], .356 [9.05], .604 [15.35], .197 [5.00], .669 [17.00], 1.571 [39.91]

EUROPEAN (Type C) P/N: PA-007-2

Dimensions: 1.574 [39.98], .165 [4.20], .728 [18.49], .756 [19.20], .713 [18.10], .362 [9.20], .124 [3.14], .157 [4.00], .154 [3.90], 1.299 [33.00], 88.5°, .689 [17.50], 1.363 [34.63]

CHINA P/N: PA-007-5

Dimensions: .197 [5.00], .362 [9.20], .669 [17.00], .248 [6.30], .057 [1.45], .502 [12.75], 1.571 [39.91], 1.303 [33.10], 1.569 [39.84]

UK / IRELAND P/N: PA-007-3

Dimensions: .1929 [49.00], .156 [3.95], .874 [22.20], .246 [6.26], 1.811 [45.99], .315 [8.00], .157 [4.00], .894 [22.70], .709 [18.00], .874 [22.20], .362 [9.20]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED					909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710																		
INCHES					HOLES		TITLE POWER ADAPTER TO DC PLUG, COLOR BLACK 9 VOLT, 2.2AMP, UL2468 20AWG, 5.5X2.1X9.5MM																
.X	± .10	∅X	± .10	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">APPROVALS</td> <td colspan="2" style="text-align: center;">DATE</td> </tr> <tr> <td style="width:50%;">DRAWN</td> <td style="width:50%;">WX</td> <td colspan="2" style="text-align: center;">3/22/21</td> </tr> <tr> <td>CHECKED</td> <td>AC</td> <td colspan="2" style="text-align: center;">3/22/21</td> </tr> <tr> <td>APPROVED</td> <td></td> <td colspan="2"></td> </tr> </table>		APPROVALS			DATE		DRAWN	WX	3/22/21		CHECKED	AC	3/22/21		APPROVED				
APPROVALS		DATE																					
DRAWN	WX	3/22/21																					
CHECKED	AC	3/22/21																					
APPROVED																							
.XX	± .020	∅XX	± .015	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:25%;">SIZE</td> <td style="width:50%;">PART NO.</td> <td style="width:25%;">REV.</td> </tr> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">PA-007-X</td> <td style="text-align: center;">B</td> </tr> </table>		SIZE	PART NO.	REV.	X	PA-007-X	B												
SIZE	PART NO.	REV.																					
X	PA-007-X	B																					
.XXX	± .015	∅XXX	± .010	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>REF:</td> <td>SCALE: NTS</td> <td>SHEET 2 OF 2</td> </tr> </table>		REF:	SCALE: NTS	SHEET 2 OF 2															
REF:	SCALE: NTS	SHEET 2 OF 2																					