

HellermannTyton

Conduit Reducers, IP68, HGL-R


Conduit Reducers are used with T-Connectors to combine different conduit diameters. Suitable for use on all types of corrugated conduits, both fine and course pitch material. Nylon material provides high resistance to oils and solvents, with great durability and extremely high extraction force. Choose from IP66 or IP68 ingress protection rated fittings.



Conduit Size				Euro Size	HellermannTyton Part Number	Manufacturer Reference Number	Dimensions									
ØD	"A"	ØD	"A"				B		C		D		E		F	
in.	in.	mm	mm				in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
1/2	3/8	21	16	17	HGL038-R050	FPAX16-R21	0.89	22.5	1.12	28.5	1.12	28.5	0.57	14.5	1.16	29.5
3/4	3/8	28	16	23	HGL038-R075	FPAX16-R28	1.12	28.5	1.12	28.5	1.12	28.5	0.57	14.5	1.33	33.8
	1/2		21	23	HGL050-R075	FPAX21-R28	1.12	28.5	1.18	30	1.26	32	0.69	17.5	1.33	33.8
1	3/8	34	16	29	HGL038-R100	FPAX16-R34	1.17	29.8	1.12	28.5	1.12	28.5	0.57	14.5	1.74	44.1
	1/2		21	29	HGL050-R100	FPAX21-R34	1.17	29.8	1.18	30	1.26	32	0.69	17.5	1.74	44.1
	3/4		28	29	HGL075-R100	FPAX28-R34	1.17	29.8	1.38	35	1.73	44	1.01	25.7	1.74	44.1
1.25	1/2	42	21	36	HGL050-R125	FPAX21-R42	1.17	29.8	1.18	30	1.26	32	0.69	17.5	1.97	50
	3/4		28	36	HGL075-R125	FPAX28-R42	1.17	29.8	1.38	35	1.73	44	1.01	25.7	1.97	50
	1		34	36	HGL100-R125	FPAX34-R42	1.17	29.8	1.46	37	1.99	50.5	1.24	31.5	1.97	50

Technical Properties and Performance

Property	Rating
Material: Nylon PA66	Polyamide Nylon 66 (PA66)
Application:	Suitable for reducing conduit sizes throughout an installation.
IP (Ingress Protection) rating	IP66+IP67+IP68(2bar)
Temperature Range	-50°C to +135°C
Color	Black
Thread Pattern	NA
Supplied with neoprene face seal washer	No
Suitable for fine or coarse pitch conduits	Yes
UL Recognized (File E229161)	No
UL Listed (File No. E247502)	No
UV Resistant	Yes
Halogen, Sulphur and Phosphorous free	Yes
Anti vibration and Tamper Resistant	Yes
Flammability: UL 94	V2
Country of Origin	United Kingdom

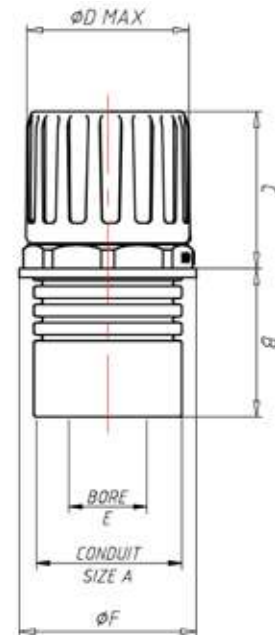

Warranty Policy HellermannTyton products are warranted to be free from defects in material and workmanship at the time sold by us; but our obligation under this warranty and that of the seller is limited to the replacement of the product, and neither we nor the seller are bound by any other warranty, expressed, implied or statutory. Under no circumstances are we or the seller liable for any loss, damage, expenses or consequential damages of any kind arising out of the use or inability to use these products. All are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses. Every effort is made to ensure accuracy and completeness when describing the technical properties of these products.