



Description: MiMo LTE, GNSS Vehicle Mount Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R





Features:

- Supports LTE 698-960/1695-2170/2300-2700/2900-3600MHz(MIMO)
- Supports Beidou, GPS, Galileo, GLONASS
- Direct Mount and optional Magnetic Mount features
- See GPSMBMM for magnetic mount details

Applications:

- Energy (Utility Vehicles)
- First Responders (Police, Ambulance, Fire)
- · Fleet Management
- Location based services
- Telematics
- Railroad

All dimensions are in mm / inches

Issue: 1823

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 VVancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description: MiMo LTE, GNSS Vehicle Mount

Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

This document covers all product variants of the following product family

Model No.	Color	Remark
GPSMB301	Black	
GPSMB302	White	
GPSMB301R	Black	Compliant with EN 50155, EN 61373, EN45545-2, railroad application.
GPSMB302R	White	Compliant with EN 50155, EN 61373, EN45545-2, railroad application.

Issue: 1823

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Pulse GmbH & Do, KG VVancouver, WA 98683 LISA Tel: 1-360-944-7551

Europe Headquarters Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description: MiMo LTE, GNSS Vehicle Mount Antenna

Series: Panther

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R, GPSMB302R

ELECTRICAL SPECIFICATIONS

Frequency (LTE)		698 – 960 /1695 -2170 / 2300 – 2700 / 2900 - 3600	MHz
Frequency (Beidou, GPS, Gal	lileo, Glonass)	$1561.098\pm2.046/$ $1575.42\pm1.023/$ 1602.5625 ± 4	MHz
Nominal Impedance		50	Ω
VSWR (LTE)		< 1.5	
Gain* (LTE antenna, < 2170	MHz)	6	$\mathrm{dBi}\pm \mathrm{1}\mathrm{dB}$
Gain* (LTE antenna, > 2170	MHz)	5.5	$dBi \pm 1dB$
Isolation LTE to LTE**		15 or better	dB
GNSS antenna RHCP gain		1	dBic ±2dB
LNA gain		30	dB ± 2 dB
Noise Figure		2.5 (cascade)	dB
Current		8	mA ± 2 mA
V_{dc}		3-5	V_{dc}
LNA and filter attenua	ation		
	@ 824 MHz	70	dB
	@ 960 MHz	65	dB
	@ 1710 MHz	60	dB
	@ 2170 MHz	65	dB
Connector type		SMA	
Cable type(s)		RG-58 (LTE) / RG-174 (GPS)	
Length		17	Feet

^{*}Measured on 2ft GND plane and with 4 inch cables

^{**}In free space with 17ft cables







TECHNICAL DATA SHEET

Description: MiMo LTE, GNSS Vehicle Mount

Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

MECHANICAL SPECIFICATIONS

Plastic radome for GPSMB301/GPSMB302 ABS/PC Material UV

Stabilized, UL-94HB

for GPSMB301R/GPSMB302R PC material, EN45545

R6 HL3 compliant

Color Black, White

Ingress Protection IP67

Weight ~940 g

Mounting Direct or Magnetic options

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40-+85° C

Humidity 95%RH @ +25°C for 12h and 55°C for 12h

Vibration MIL-STD 810G, section 514.6, 5-500 Hz, 60min/axis

Thermal Shocks MIL-STD 810G, section 503.5, -40 to +85°C, 3 cycles

Drop Test Minimum of one drop per axis – 4, 1 meter drops





Description: MiMo LTE, GNSS Vehicle Mount

Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

Tests for railroad certification per EN50155, EN61373, EN45545-2

NO	T SN IN STAND	TEST DESCRIPTION	REFER STANDARD	TEST REPORT NO	RESULT(PASS/FAIL)
1	12.2.3	Cooling test		DD20170919002	PASS
2	12.2.4	Dry heat test	EN 50155		
3	12.2.5 Damp heat test, cyclic				
4	12.2.6	Supply overvoltages	EN 50155	W01714200900E	PASS
5	12.2.7	Surges, electrostatic discharge and transient burst susceptibility tests	EN 50155	E1710056-01E	PASS
6	12.2.8	Radio interference	6		
7	12.2.9	Insulation test	EN 50155	E17110014-01E	PASS
8	12.2.10 Salt mist test		EN 50155		
0	10011	Vibration	EN 61373		PASS
9	12.2.11	Shock, and bump test	EN 61373	DD20170919002	
10	12.2.12	Watertightness test	EN 50155		
11	12.2.14	Low temperature storge test	EN 50155		
12	1	fire & emoke	EN 45545-2 R15&R16	TC 18 02 000528	HL1&HL2
		fire & smoke	EN 45545-2 R15&R16	TC.18.04.001633	HL1&HL2&HL3



TECHNICAL DATA SHEET


Description: MiMo LTE, GNSS Vehicle Mount

Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

MECHANICAL DRAWING

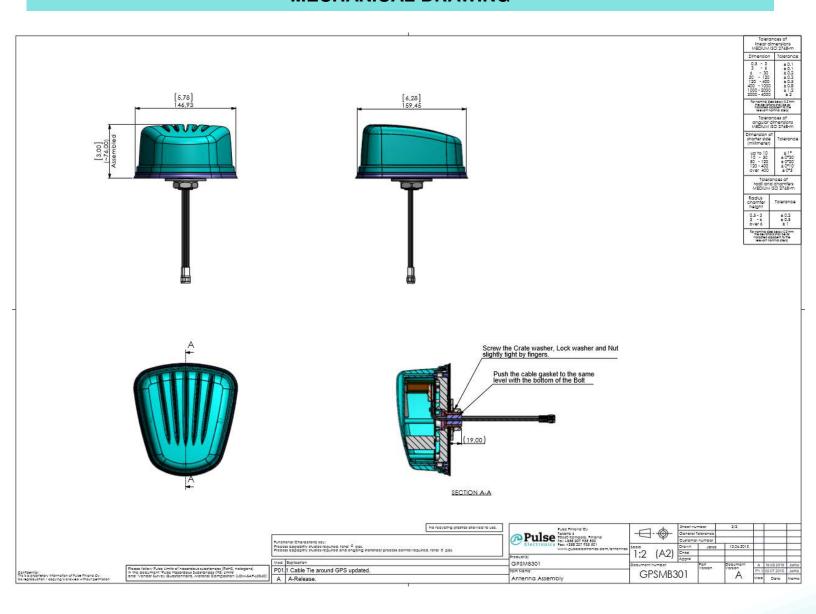

Issue: 1823







Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

CHARTS


Return loss and isolation in free space, LTE antennas**

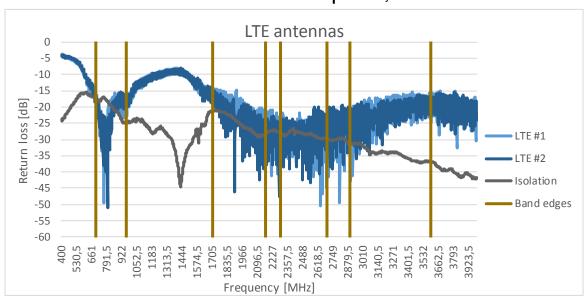

GNSS isolation to LTE 1 and LTE 2 antenna*

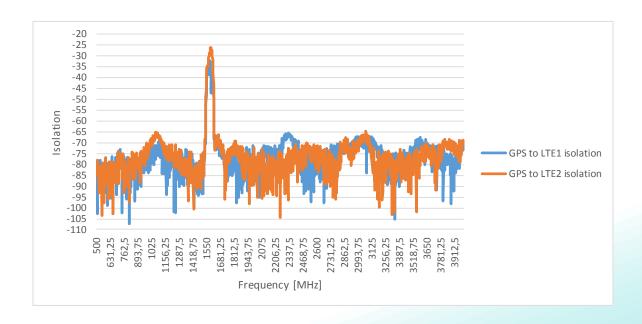

Issue: 1823





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

CHARTS


Return loss and isolation, LTE antennas*

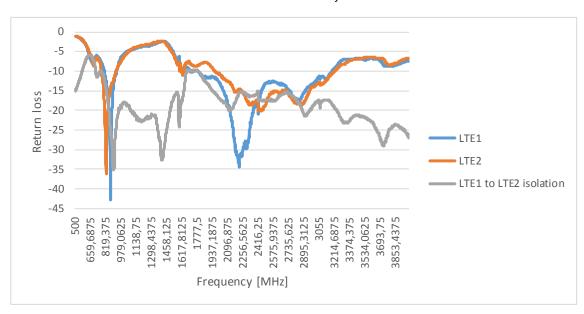

GNSS LNA performance

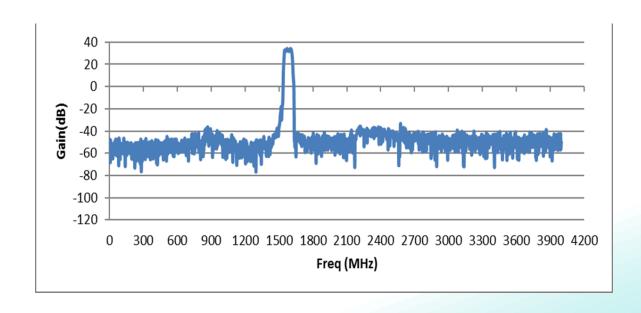

Issue: 1823





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

CHARTS

LTE antenna total efficiency with 2ft metal plate and 4 inch cables

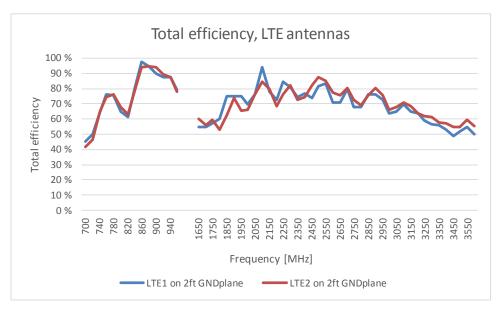

Maximum 3D gain, LTE antenna with 2ft metal plate and 4inch cables

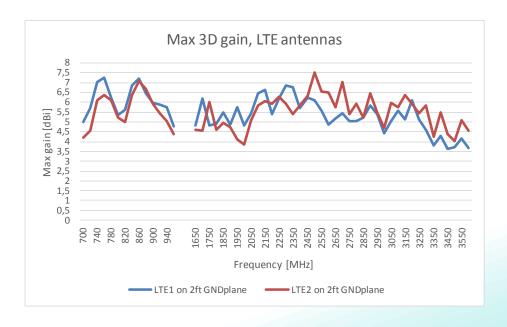









Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

CHARTS

LTE antenna radiation pattern at 850MHz with 2ft metal plate and 4inch cables

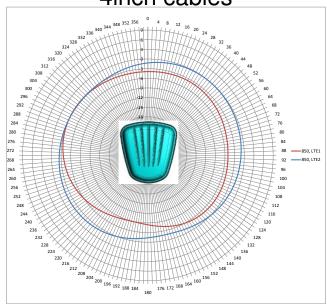

Horizontal plot

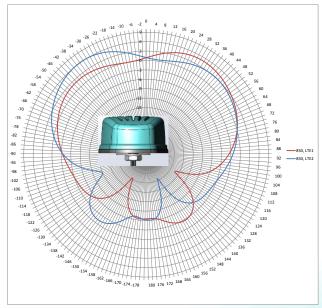

Vertical plot front view





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

CHARTS

LTE antenna radiation pattern at 850MHz with 2ft metal plate and 4inch cables

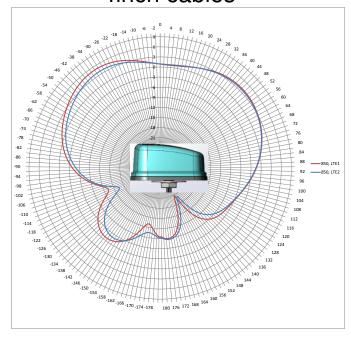

Vertical plot side view





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

CHARTS

LTE antenna radiation pattern at 1900MHz with 2ft metal plate and 4inch cables

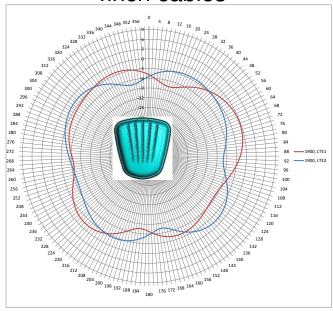

Horizontal plot

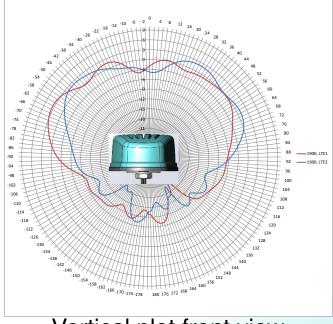

Vertical plot front view





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

CHARTS

LTE antenna radiation pattern at 1900MHz with 2ft metal plate and 4inch cables

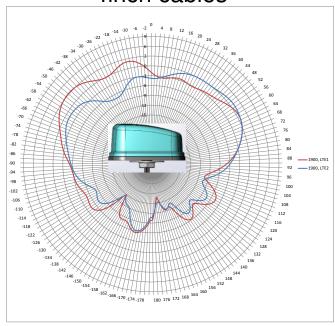

Vertical plot side view







Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

CHARTS

LTE antenna radiation pattern at 2500MHz with 2ft metal plate and 4inch cables

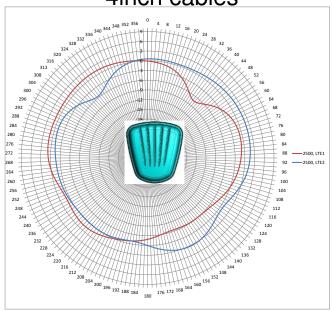

Horizontal plot

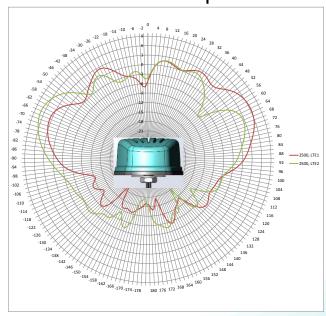

Vertical plot front view

Issue: 1823

ROHS





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

CHARTS

LTE antenna radiation pattern at 2500MHz with 2ft metal plate and 4inch cables

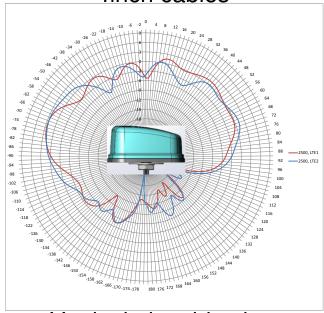

Vertical plot side view





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

CHARTS

LTE antenna radiation pattern at 3250MHz with 2ft metal plate and 4inch cables

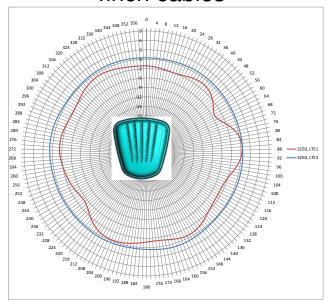

Horizontal plot

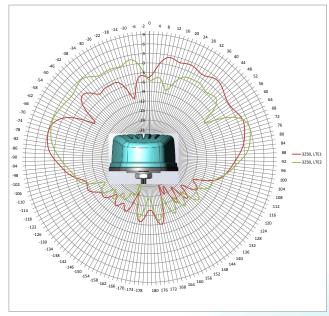

Vertical plot front view

Issue: 1823

ROHS





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

CHARTS

LTE antenna radiation pattern at 3250MHz with 2ft metal plate and 4inch cables

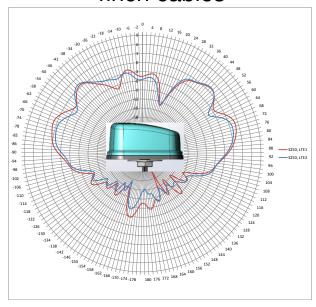

Vertical plot side view







Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,


GPSMB302R

CHARTS

BD2 RHCP patterns, measured with 4inch cables in free space

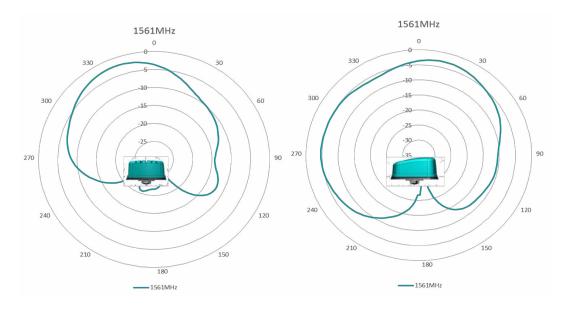

GPS & Galileo RHCP patterns, measured with 4inch cables in free space

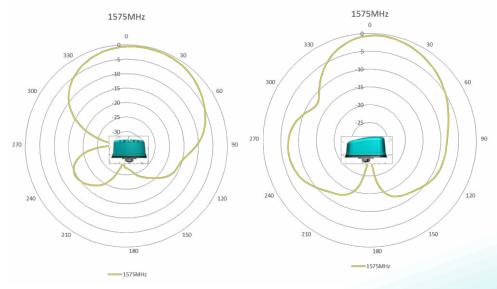





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

CHARTS

GLONASS RHCP patterns, measured with 4inch cables in free space

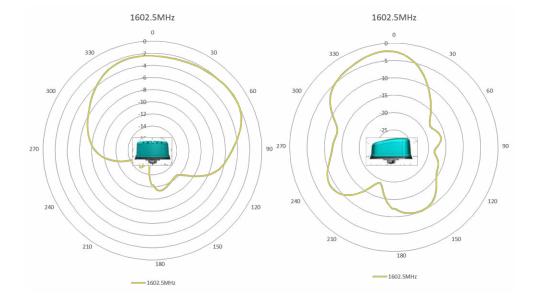





Description: MiMo LTE, GNSS Vehicle Mount


Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

CHARTS

Envelope correlation coefficient - LTE 1 to LTE 2

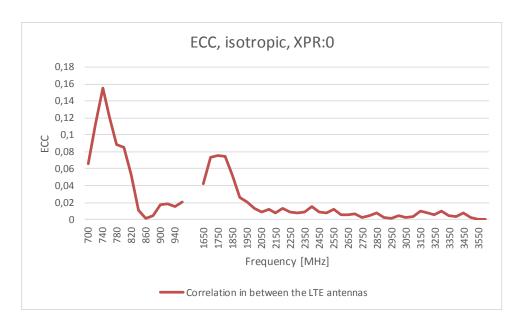





TECHNICAL DATA SHEET

Description: MiMo LTE, GNSS Vehicle Mount

Antenna

PART NUMBER: GPSMB301, GPSMB302,GPSMB301R,

GPSMB302R

PACKAGING

One antenna pack in one PE bag, 6 antennae in one box

