

Marker for terminal blocks - UC-TM 6 YE CUS - 0824595

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: by sheet, yellow, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm



Why buy this product

- The UC-TM ... UniCard labeling range includes markers for products with tall marker grooves
- The markers, which are supplied in uniform sheets, can be labeled quickly and easily using the BLUEMARK LED
- Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- The multi-section marking strips are easy to fit and can be easily separated if required
- The markers support multi-line labeling
- The sheets provide space for including function texts
- The format automatically ensures printing with a high degree of positioning accuracy



Key Commercial Data

| | |
|----------------------|----------|
| Packing unit | 1 STK |
| Custom tariff number | 49119900 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|-----------|------|
| Width (a) | 6 mm |
|-----------|------|

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 120 °C |
|---------------------------------|-------------------|

General

| | |
|------------|--------------------------------|
| Color | yellow |
| Components | free from silicone and halogen |

Marker for terminal blocks - UC-TM 6 YE CUS - 0824595

Technical data

General


| | |
|--|------------------------------|
| Flammability rating according to UL 94 | V2 |
| Material | PA |
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Number of individual labels | 80 |
| Number of individual labels per row | 10 |
| Marking mounting type | Snap into tall marker groove |

Standards and Regulations

| | |
|--|-----------------------------|
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Flammability rating according to UL 94 | V2 |

Drawings

Schematic diagram

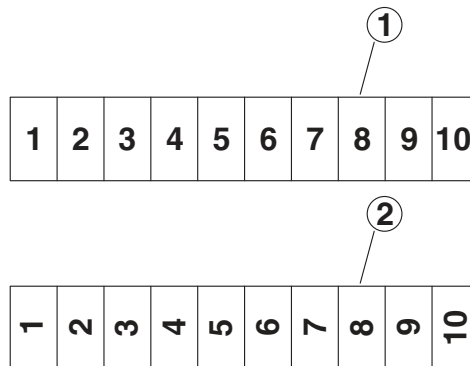

- ① Horizontal
- ② Vertical

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 24190208 |
| eCl@ss 4.1 | 24190208 |
| eCl@ss 5.0 | 27149103 |
| eCl@ss 5.1 | 27141137 |
| eCl@ss 6.0 | 27141137 |
| eCl@ss 7.0 | 27141137 |
| eCl@ss 8.0 | 27141137 |
| eCl@ss 9.0 | 27141137 |

Marker for terminal blocks - UC-TM 6 YE CUS - 0824595

Classifications

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000761 |
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC000761 |
| ETIM 5.0 | EC000761 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |