

Power Triple Lock TE Internal #: 7-1971773-3 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

#### View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > High Temperature Plug — POWER TRIPLE LOCK



Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 6 mm [.236 in ]

All High Temperature Plug — POWER TRIPLE LOCK (43)

#### Features

#### Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Number of Power Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	600 VDC
Body Features	

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Cable Exit Angle	180°
Connector & Keying Code	С
Contact Features	
Contact Layout	Inline
Contact Retention Within Housing	Without
Contact Type	Receptacle
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Panel Mount Feature	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	6 mm[.236 in]
Housing Color	Black
Housing Material	Nylon
Dimensions	
Connector Height	14.95 mm

### Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Operation/Application	
Circuit Application	Power
Identification Marking	
Circuit Identification Feature	With
Industry Standards	
Glow Wire Material Rating	Material with GWIT $\geq$ 775°C
UL Rating	Recognized
UL Rating Agency/Standard	Recognized UL
Agency/Standard	UL
Agency/Standard Approved Standards	UL UL E28476

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Packaging Method

Carton

#### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock





# Also in the Series | Power Triple Lock

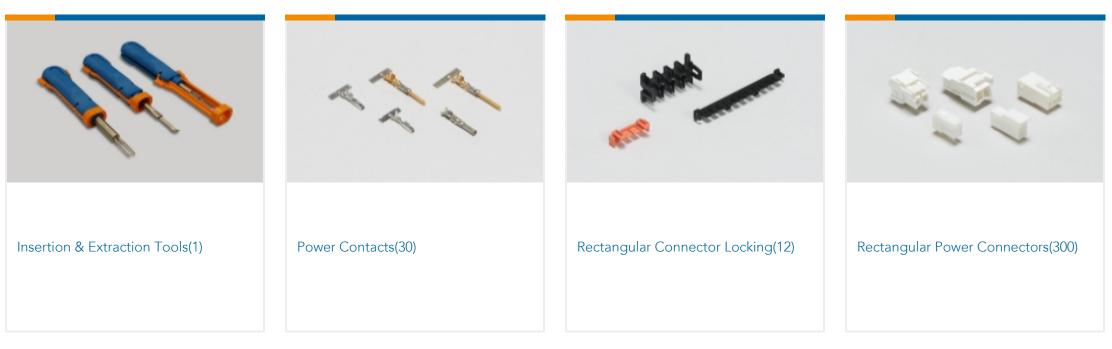

# Customers Also Bought



#### Documents

# Product Drawings PTL 1X3 PLUG HSG HIGH TEMP KEY C BLK

English

#### **CAD** Files

3D PDF

3D

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Customer View Model

#### ENG\_CVM\_CVM\_7-1971773-3\_F.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_7-1971773-3\_F.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_7-1971773-3\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance
Product Compliance Document
English
Product Compliance Document

English