

ITEM	MOLEX NO	DESCRIPTION	QTY	UOM
A,C	5055650402	1.25WTB SINGLE REC HSG 4CKT RED	2	PC
B	5054311000	1.25 ROBUST W/B CRIMP TERM.	8	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

CKT NO		WIRE #	COLOR	DESCRIPTION
From	To			
A1	C4	884530501	BLACK	1X26AWG DISC PVC BK 0.98MM UL1061 HOOKUP
A2	C3			
A3	C2			
A4	C1			

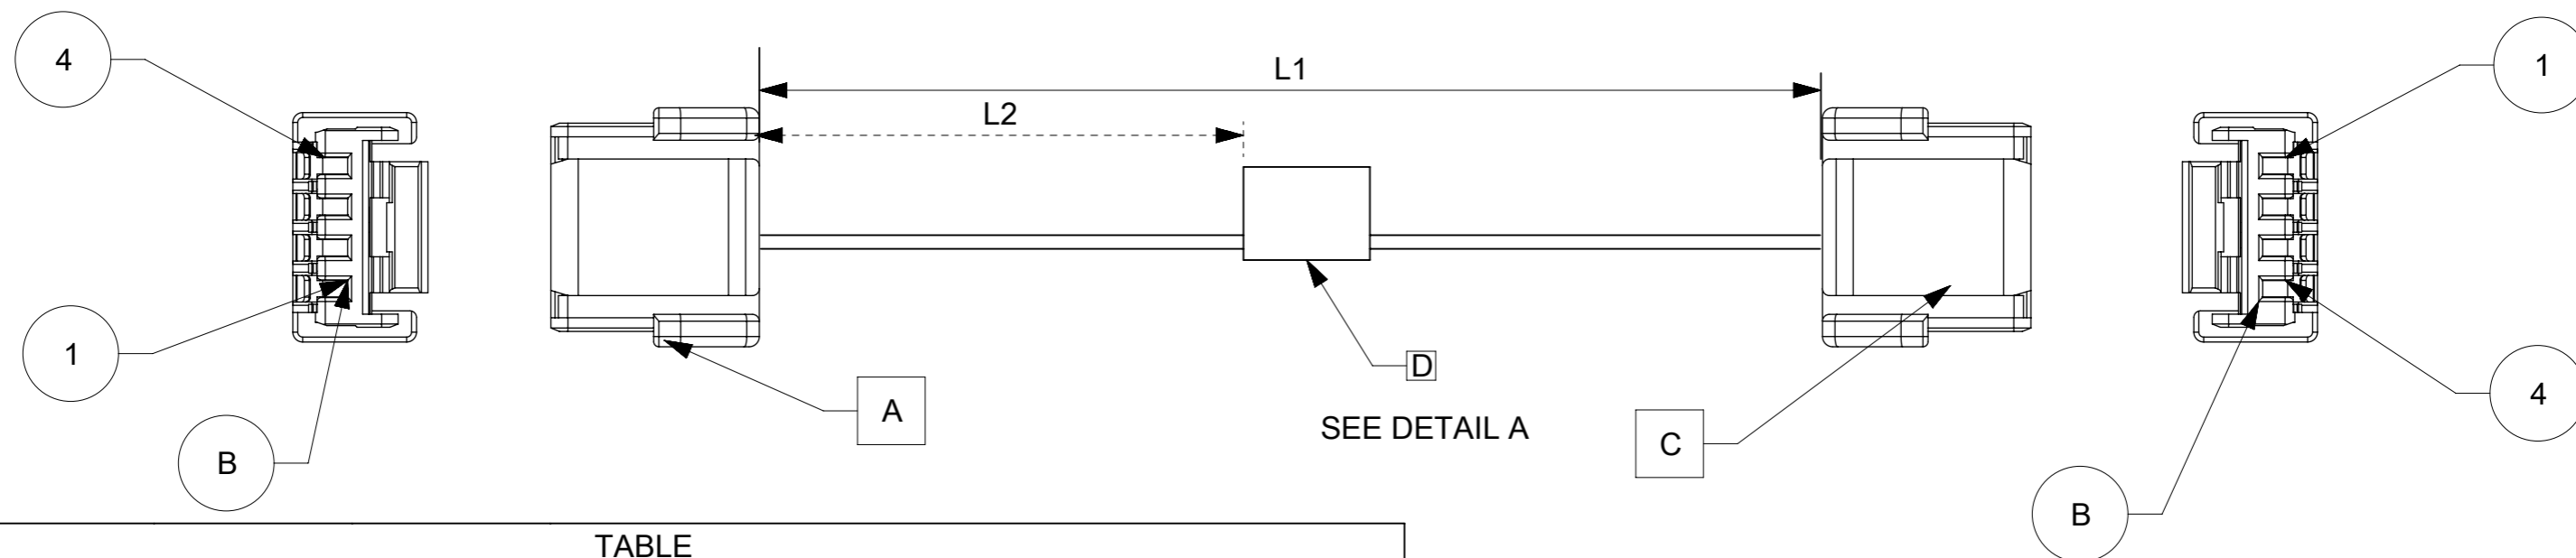


TABLE			
PART NUMBER	L1	L2	TITLE
451120400	50±5	18REF	Microlock Plus Cable Red 4-ckt 50MM
451120401	100±8	44REF	Microlock Plus Cable Red 4-ckt 100MM
451120402	150±10	69REF	Microlock Plus Cable Red 4-ckt 150MM
451120403	300±10	144REF	Microlock Plus Cable Red 4-ckt 300MM
451120405	450±15	219REF	Microlock Plus Cable Red 4-ckt 450MM
451120406	600±15	294REF	Microlock Plus Cable Red 4-ckt 600MM

NOTES

1. This product must meet 2011/65/EC ROHS compliance.
2. Cable assembly to be tested 100% for continuity and polarity.
3. Label text must be 2mm max. In height with Arial font.
4. Connector view shown is from mating side.

P/N:45112XXXX — MOLEX PN
 MOLEX
 Batch WK/YR

DETAIL A

QUALITY SYMBOLS FA = 0 FE = 0 FB = 0 ▼ = 0 C = 0 ⊗ = 0 ■ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	EC NO: 167026 DRWN: RDESAI01 CHK'D: MNRARAYAN01 APPR: MNRARAYAN01	2017/10/23 2017/10/23	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ± DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION UNITS: mm SCALE: NTS DRWN BY: RDESAI01 DATE: 2017/07/11 CHK'D BY: [blank] DATE: [blank] APPR BY: MNRARAYAN01 DATE: 2017/07/14 DRAWING SIZE: A3 THIRD ANGLE PROJECTION: [Symbol]
MICROLOCK PLUS CABLE RED 4-CKT		PRODUCT CUSTOMER DRAWING		
SERIES: 45112 MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET		DOCUMENT NUMBER: 451120400 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1		