

RS F40 INIT32 LD LMZF**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

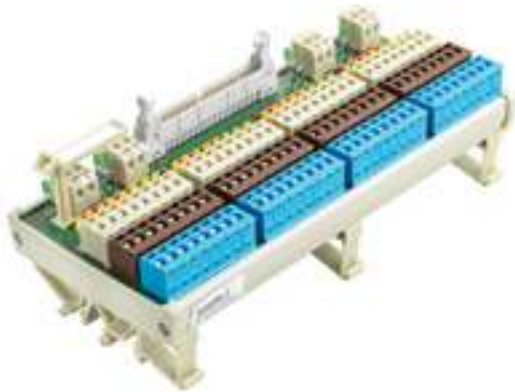

Passive RS F40 or RS F10 interface elements for 32 or 8 signals: these enable an efficient connection of peripherals (sensors and actuators) to the input/output modules of the PLC using pre-assembled cables.

The main characteristics are:

- Tension-clamp or screw connection system
- Signals grouped according to bytes.
- 1-, 2- or 3-wire technology.
- Extremely compact modules in RS 45 profile section for installation on standard TS35 mounting rail.

General ordering data

Type	RS F40 INIT32 LD LMZF
Order No.	842890000
Version	3-wire, Tension clamp connection
GTIN (EAN)	4008190030384
Qty.	1 pc(s).

RS F40 INIT32 LD LMZF

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data

Dimensions and weights

Length	185 mm	Width	87 mm
Height	73 mm	Net weight	317 g

Temperatures

Operating temperature	-25...+50°C	Storage temperature	-40...+60 °C
-----------------------	-------------	---------------------	--------------

General data

LED status display per channel	yellow	Fuse per channel	No
LED status of the supply voltage	green	Power supply fuse	No

Connection data

Connection on control side	Connector according IEC60603-13/DIN41651	Number of poles (control side)	40-pole plug
Connection (field side)	LMNZF 5.08mm	Connection supply	LMNZF 5.08mm
Wiring system	3-wire		

Ratings data

Operating voltage	24 V DC \pm 10%	Max. current per channel	1 A
-------------------	-------------------	--------------------------	-----

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	< 50 V AC
Surge voltage category	III	Pollution severity level	2
Insulation test voltage	0.35 kVAC		

Connection field

Type of connection	Tension clamp connection	Clamping range, min.	0.15 mm ²
Clamping range, max.	1.5 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	1.5 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²	Flexible with sleeve, max.	1.5 mm ²
Sleeve with plastic collar, max.	2.5 mm ²	Min. wire cross-section, AWG [field]	AWG 26
Max. wire cross-section, AWG [field]	AWG 14	Stripping length	7 mm

Supply connection

Type of connection	Tension clamp connection	Clamping range, min.	0.15 mm ²
Clamping range, max.	1.5 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	1.5 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²	Flexible with sleeve, max.	1.5 mm ²
Wire cross-section, min. AWG	AWG 26	Wire cross-section, max. AWG	AWG 14
Stripping length	7 mm		

Classifications

ETIM 3.0	EC001419	UNSPSC	30-21-18-01
eClass 5.1	27-24-22-04	eClass 6.2	27-24-22-04
eClass 7.1	27-24-22-04		

Data sheet

RS F40 INIT32 LD LMZF

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Product information

Descriptive text technical data Factory setting: Common negative pole

Approvals

Approvals



ROHS Conform

RS F40 INIT32 LD LMZF

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

