

# Inductive sensor


## NBN15-30GK60-AR-3M



- Relay output
- Sensing range 15 mm
- SPDT output
- Switch load currents to 6 Amps



### Dimensions

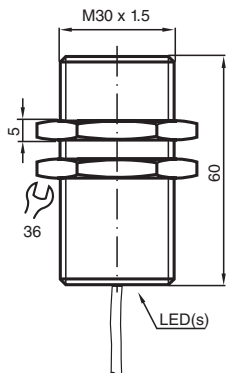

### Technical Data

General specifications		
Switching function		change-over contact
Output type		relay
Rated operating distance	$s_n$	15 mm
Installation		non-flush
Output polarity		DC
Reduction factor $r_{Al}$		0.4
Reduction factor $r_{Cu}$		0.37
Reduction factor $r_{304}$		0.73
Output type		Relay output
Mechanical life		No load: $2 \times 10^7$ operations Full load: $1 \times 10^5$ switching cycles
Nominal ratings		
Operating voltage	$U_B$	10 ... 30 V DC

Release date: 2022-05-19 Date of issue: 2022-05-19 Filename: 904970\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS



## Technical Data

Switching frequency	f	20 Hz
Hysteresis	H	approx. 10 %
Reverse polarity protection		yes
Short-circuit protection		no
Operating current	$I_L$	$\leq 50$ mA
Switching state indicator		LED, yellow
<b>Output</b>		
Switching voltage		max 28 V DC
Switching current		6 A DC resistive load
Switching power		max 180 W
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007
<b>Approvals and certificates</b>		
UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
<b>Ambient conditions</b>		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
<b>Mechanical specifications</b>		
Connection type		3-meter cable, PVC heavy jacket, 5-conductor, #18 AWG
Core cross section		0.75 mm <sup>2</sup>
Housing material		PBT
Sensing face		PBT
Degree of protection		IP68

## Connection



## Accessories

	<b>BF 30</b>	Mounting flange, 30 mm
	<b>AB-30</b>	Mounting aid