

# OSRAM LZP-00MN00

## Datasheet

Published by **ams-OSRAM AG**

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

[ams-osram.com](http://ams-osram.com)


© All rights reserved



## LED ENGIN LuxiGen

# LZP-00MN00

Industry most robust high power ceramic package with glass lens for high performance over life.

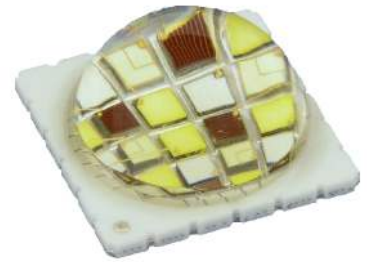

### Applications

- Architecture
- Stage Lighting (LED & Laser)

### Features

- Package: Ceramic package with integrated glass lens
- Chip technology: Thinfilm / UX:3
- Typ. Radiation: 120°
- Color:  $\lambda_{\text{dom}} = 623 \text{ nm}$  (● red);  $\lambda_{\text{dom}} = 523 \text{ nm}$  (● true green);  $\lambda_{\text{dom}} = 457 \text{ nm}$  (● blue);  $C_x = 0.38$ ,  $C_y = 0.38$  acc. to CIE 1931 (● neutral white)
- CRI: 75 (typ.)

## Ordering Information

| Type            | Brightness <sup>1)</sup>   | Ordering Code |
|-----------------|--|---------------|
| LZP-00MN00-0000 |  | Q65113A3073   |
| • red           | • $\Phi_V = 600 \dots 940 \text{ lm}$ ( $I_F = 700 \text{ mA}$ )   |               |
| • true green    | • $\Phi_V = 720 \dots 1130 \text{ lm}$ ( $I_F = 700 \text{ mA}$ )  |               |
| • blue          | • $\Phi_V = 172 \dots 420 \text{ lm}$ ( $I_F = 700 \text{ mA}$ )   |               |
| • neutral white | • $\Phi_V = 1250 \dots 1960 \text{ lm}$ ( $I_F = 700 \text{ mA}$ ) |               |

## Maximum Ratings

| Parameter   | Symbol        |      | Values                             | Values                             | Values                             | Values                             |
|---|---------------|------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|   |               |      | ● red                              | ● true green                       | ● blue                             | ● neutral white                    |
| Operating Temperature   | $T_{op}$      | min. | -40 °C                             | -40 °C                             | -40 °C                             | -40 °C                             |
|   |               | max. | 125 °C                             | 150 °C                             | 150 °C                             | 150 °C                             |
| Storage Temperature   | $T_{stg}$     | min. | -40 °C                             | -40 °C                             | -40 °C                             | -40 °C                             |
|   |               | max. | 150 °C                             | 150 °C                             | 150 °C                             | 150 °C                             |
| Junction Temperature <sup>2)</sup>  | $T_j$         | max. | 125 °C                             | 150 °C                             | 150 °C                             | 150 °C                             |
| Forward Current <sup>2)</sup>   | $I_F$         | max. | 1000 mA                            | 1000 mA                            | 1000 mA                            | 1000 mA                            |
| Forward Current pulsed<br>$t \leq 10$ ms; $D \leq 0.1$ ;<br>$T_C = 25$ °C | $I_{F pulse}$ | max. | 1500 mA                            | 1500 mA                            | 1500 mA                            | 1500 mA                            |
| ESD withstand voltage<br>acc. ANSI/ESDA/JEDEC JS-001 (HBM, Class 0)       | $V_{ESD}$     |      | ESD sensitive device               | ESD sensitive device               | ESD sensitive device               | ESD sensitive device               |
| Reverse voltage <sup>3)</sup>   | $V_R$         |      | Not designed for reverse operation | Not designed for reverse operation | Not designed for reverse operation | Not designed for reverse operation |

## Characteristics

$I_F = 700 \text{ mA}$ ;  $T_C = 25 \text{ °C}$ ; per string

| Parameter  | Symbol                  |      | Values                             |                                    | Values                             |                                    |
|--|-------------------------|------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|  |                         |      | ● red                              | ● true green                       | ● blue                             | ● neutral white                    |
| Chromaticity Coordinate <sup>4)</sup>  | C <sub>x</sub>          | typ. |                                    |                                    |                                    | 0.38                               |
|  | C <sub>y</sub>          | typ. |                                    |                                    |                                    | 0.38                               |
| Luminous Flux <sup>5)</sup>  | $\Phi_V$                | typ. | 765 lm                             | 920 lm                             | 230 lm                             | 1550 lm                            |
| Dominant Wavelength <sup>6)</sup><br>$I_F = 700 \text{ mA}$  | $\lambda_{\text{dom}}$  | min. | 617 nm                             | 520 nm                             | 453 nm                             |                                    |
|  |                         | typ. | 623 nm                             | 523 nm                             | 457 nm                             |                                    |
|  |                         | max. | 630 nm                             | 530 nm                             | 460 nm                             |                                    |
| Viewing angle at 50%<br>$I_V$  | $2\phi$                 | typ. | 125 °                              | 125 °                              | 125 °                              | 125 °                              |
| Forward Voltage <sup>7)5)</sup><br>$I_F = 700 \text{ mA}$  | $V_F$                   | min. | 12.6 V                             | 19.2 V                             | 16.8 V                             | 19.6 V                             |
|  |                         | typ. | 14.5 V                             | 20.9 V                             | 17.8 V                             | 24.1 V                             |
|  |                         | max. | 17.4 V                             | 25.2 V                             | 22.8 V                             | 26.6 V                             |
| Reverse current <sup>3)</sup>  | $I_R$                   |      | Not designed for reverse operation | Not designed for reverse operation | Not designed for reverse operation | Not designed for reverse operation |
| Color Rendering Index <sup>8)</sup>  | $R_a$                   | typ. |                                    |                                    |                                    | 75                                 |
| Electrical thermal resistance junction/case<br>Value in the first column relates to full package with all chips operated simultaneously. | $R_{\text{thJC elec.}}$ | typ. | 0.50 K / W                         |                                    |                                    |                                    |

## Brightness Groups

per string

- red

| Group | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>min.<br>$\Phi_V$ | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>max.<br>$\Phi_V$ |
|-------|---|---|
| 18R   | 600 lm  | 940 lm  |

## Brightness Groups

per string

- true green

| Group | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>min.<br>$\Phi_V$ | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>max.<br>$\Phi_V$ |
|-------|---|---|
| 20G   | 720 lm  | 1130 lm   |

## Brightness Groups

per string

- blue

| Group | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>min.<br>$\Phi_V$ | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>max.<br>$\Phi_V$ |
|-------|---|---|
| 20B   | 172 lm  | 270 lm  |
| 32B   | 270 lm  | 420 lm  |

## Brightness Groups

per string

- neutral white

| Group | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>min.<br>$\Phi_V$ | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>max.<br>$\Phi_V$ |
|-------|---|---|
| 09W   | 1250 lm   | 1960 lm   |

## Wavelength Groups

per string

- red

| Group | Dominant Wavelength <sup>6)</sup><br>$I_F = 700 \text{ mA}$<br>min.<br>$\lambda_{\text{dom}}$ | Dominant Wavelength <sup>6)</sup><br>$I_F = 700 \text{ mA}$<br>max.<br>$\lambda_{\text{dom}}$ |
|-------|---|---|
| R01   | 617 nm  | 630 nm  |

## Wavelength Groups

per string

- true green

| Group | Dominant Wavelength <sup>6)</sup><br>$I_F = 700 \text{ mA}$<br>min.<br>$\lambda_{\text{dom}}$ | Dominant Wavelength <sup>6)</sup><br>$I_F = 700 \text{ mA}$<br>max.<br>$\lambda_{\text{dom}}$ |
|-------|---|---|
| G2    | 520 nm  | 525 nm  |
| G3    | 525 nm  | 530 nm  |


## Wavelength Groups

per string

- blue

| Group | Dominant Wavelength <sup>6)</sup><br>$I_F = 700 \text{ mA}$<br>min.<br>$\lambda_{\text{dom}}$ | Dominant Wavelength <sup>6)</sup><br>$I_F = 700 \text{ mA}$<br>max.<br>$\lambda_{\text{dom}}$ |
|-------|---|---|
| B03   | 453 nm  | 460 nm  |

## Chromaticity Coordinate Groups

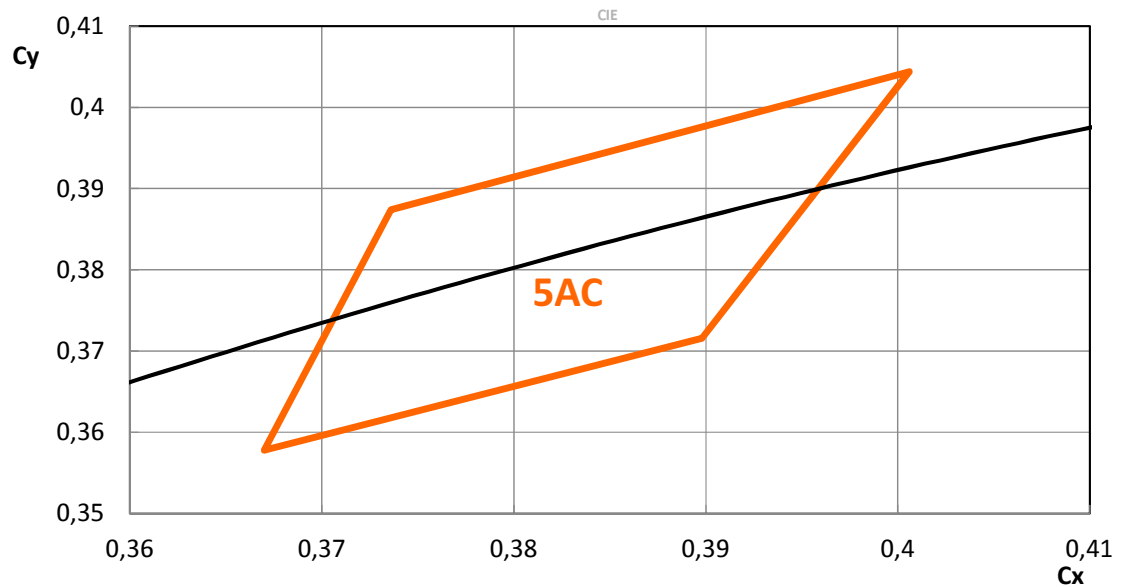

## Chromaticity Coordinate Groups

per string


- neutral white

| Group | Cx     | Cy     | CCT |
|-------|--------|--------|-----|
| 5AC   | 0.3670 | 0.3578 |     |
|       | 0.3736 | 0.3874 |     |
|       | 0.4006 | 0.4044 |     |
|       | 0.3898 | 0.3716 |     |




## Relative Spectral Emission <sup>5)</sup>

$I_{rel} = f(\lambda)$ ;  $I_F = 700 \text{ mA}$ ;  $T_C = 25 \text{ }^\circ\text{C}$

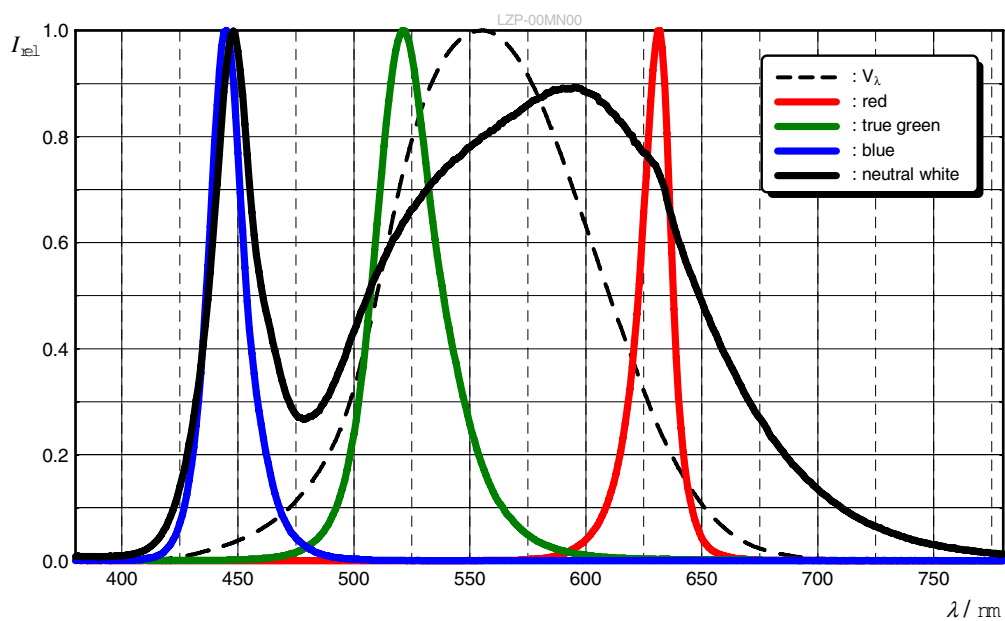


## Radiation Characteristics <sup>5)</sup>

$I_{rel} = f(\phi)$ ;  $T_C = 25 \text{ }^\circ\text{C}$

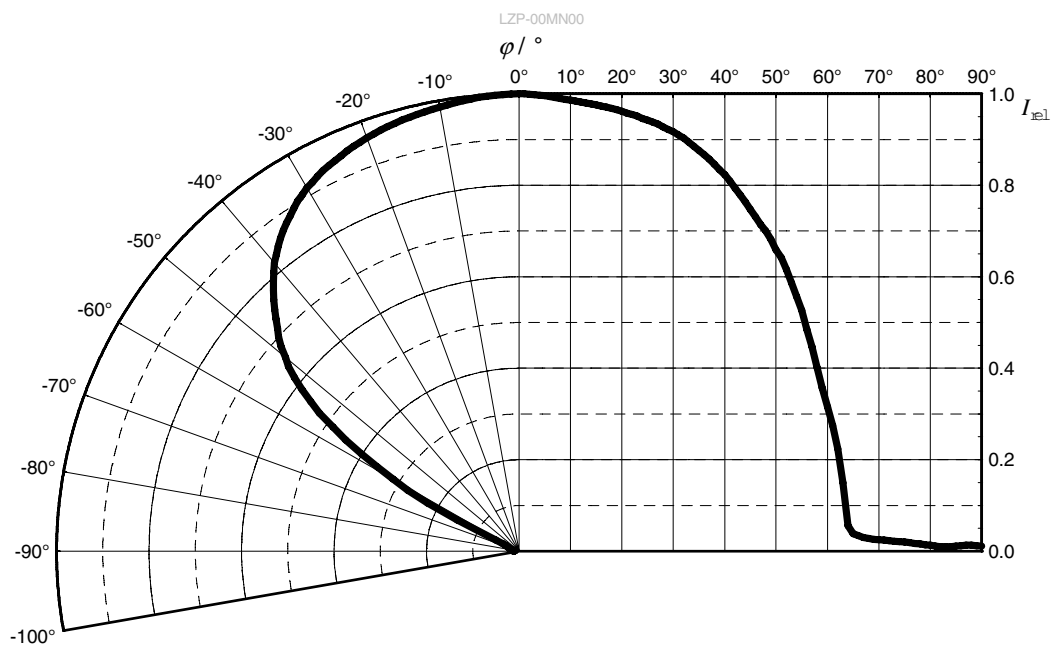


### Forward current <sup>5)</sup>

$$I_F = f(V_F); T_C = 25\text{ °C}$$

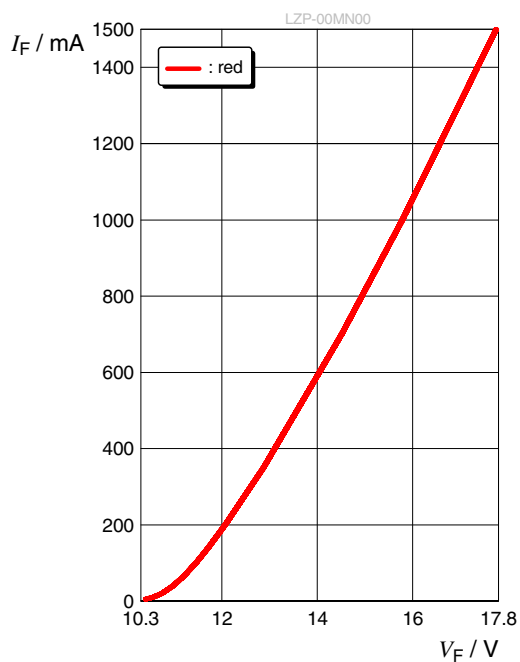


### Forward current <sup>5)</sup>

$$I_F = f(V_F); T_C = 25\text{ °C}$$

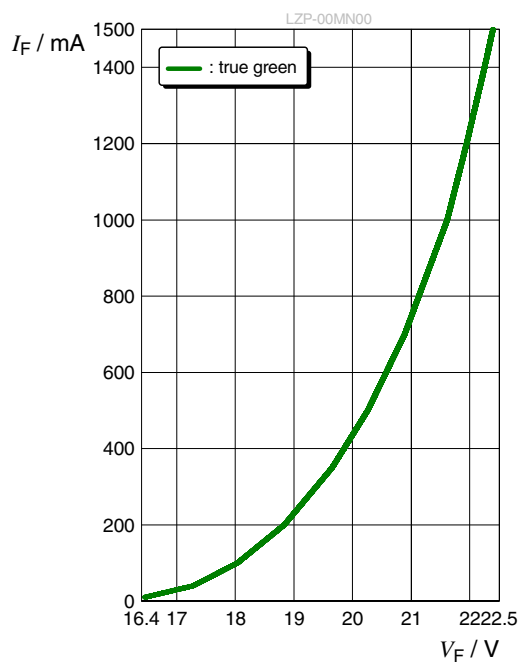


### Forward current <sup>5)</sup>

$$I_F = f(V_F); T_C = 25\text{ °C}$$

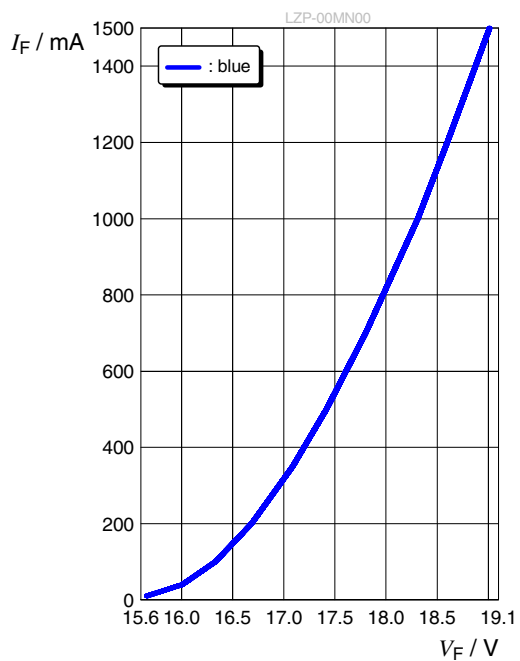


### Forward current <sup>5)</sup>

$$I_F = f(V_F); T_C = 25\text{ °C}$$

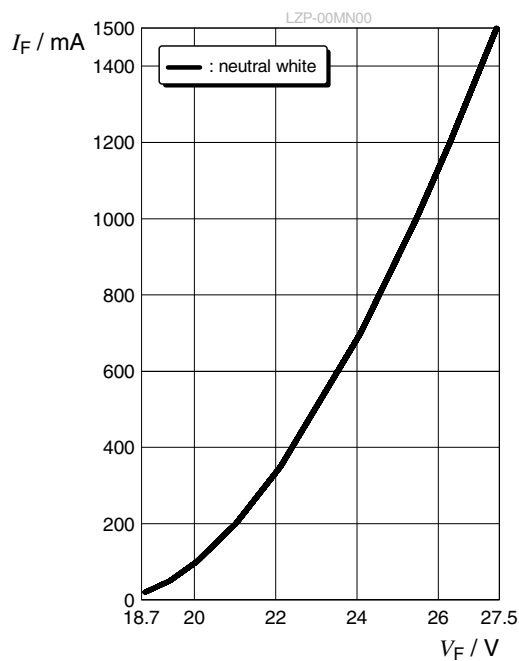


**Relative Luminous Flux** <sup>5), 9)</sup>

$\Phi_V / \Phi_V(700\text{mA}) = f(I_F); T_C = 25\text{ }^\circ\text{C}$

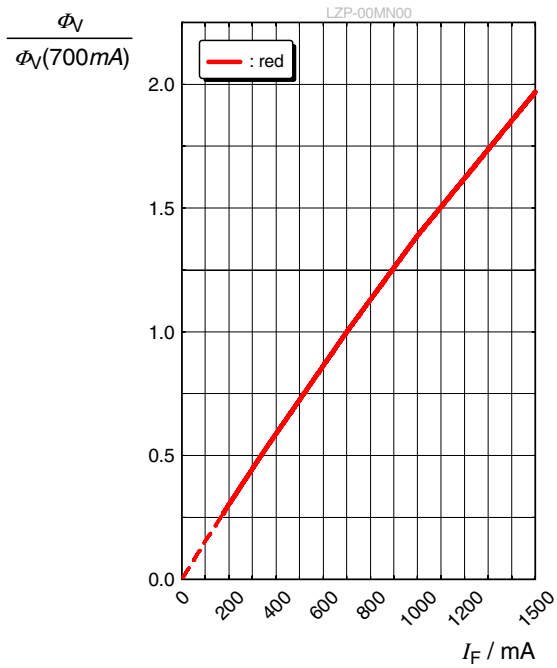


**Relative Luminous Flux** <sup>5), 9)</sup>

$\Phi_V / \Phi_V(700\text{mA}) = f(I_F); T_C = 25\text{ }^\circ\text{C}$

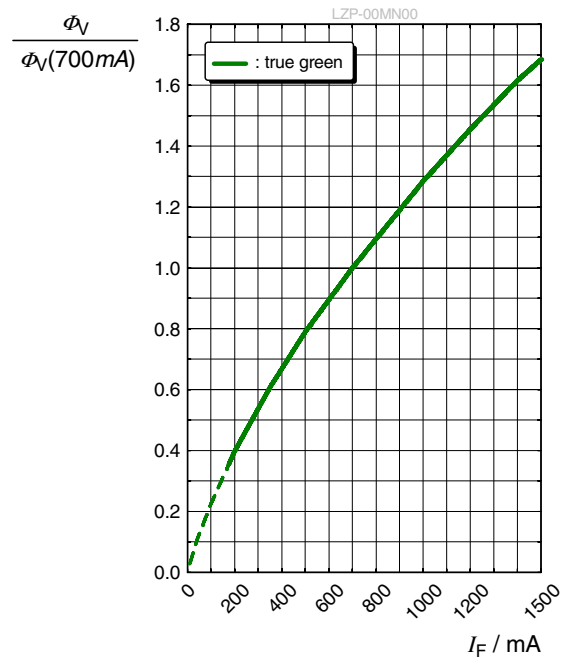


**Relative Luminous Flux** <sup>5), 9)</sup>

$\Phi_V / \Phi_V(700\text{mA}) = f(I_F); T_C = 25\text{ }^\circ\text{C}$

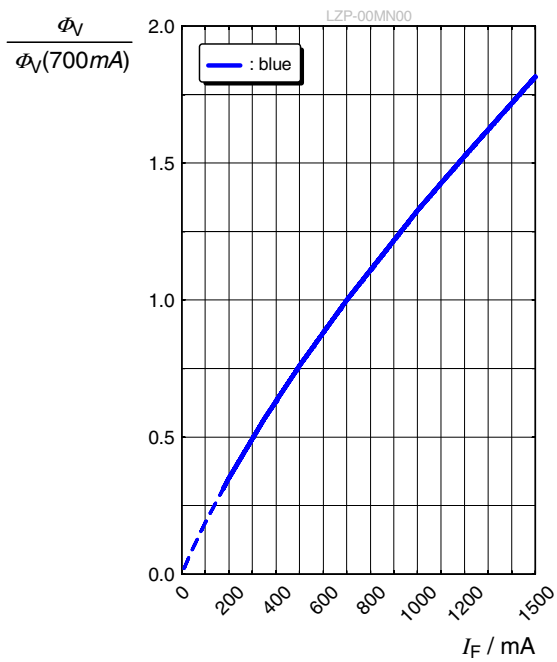


**Relative Luminous Flux** <sup>5), 9)</sup>

$\Phi_V / \Phi_V(700\text{mA}) = f(I_F); T_C = 25\text{ }^\circ\text{C}$

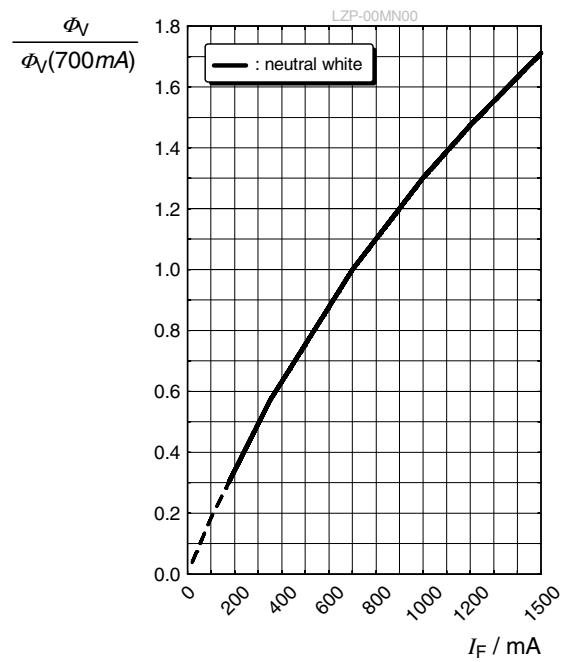


### Dominant Wavelength <sup>5)</sup>

$$\Delta\lambda_{\text{dom}} = f(I_F); T_C = 25\text{ }^\circ\text{C}$$

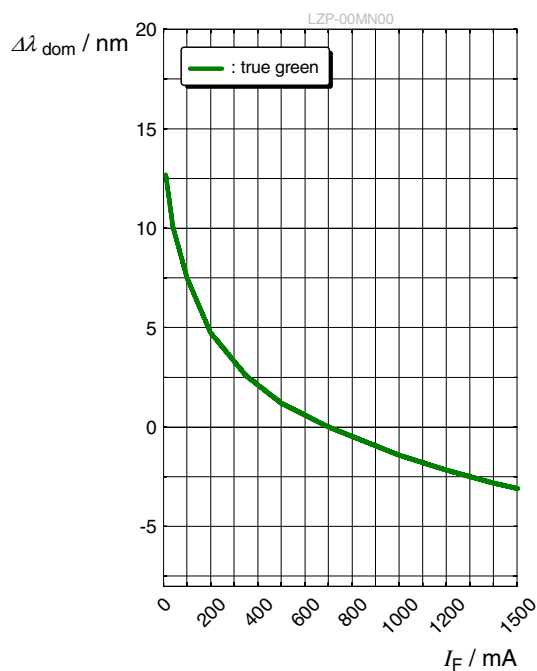


### Dominant Wavelength <sup>5)</sup>

$$\Delta\lambda_{\text{dom}} = f(I_F); T_C = 25\text{ }^\circ\text{C}$$

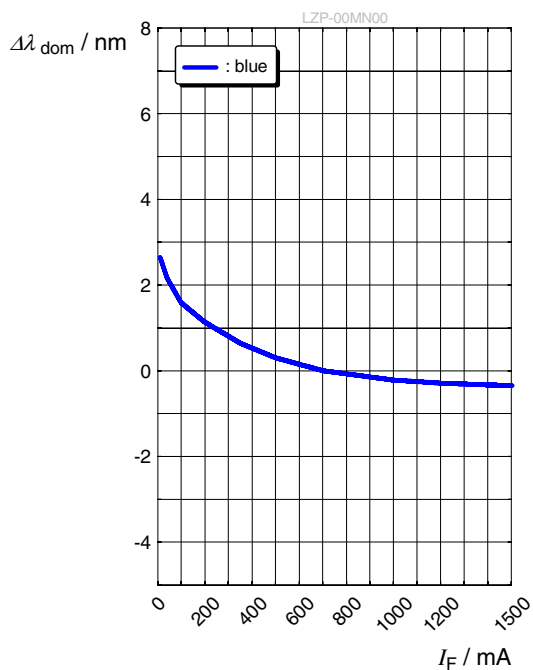


### Chromaticity Coordinate Shift <sup>5)</sup>

$$\Delta Cx, \Delta Cy = f(I_F); T_C = 25\text{ }^\circ\text{C}$$

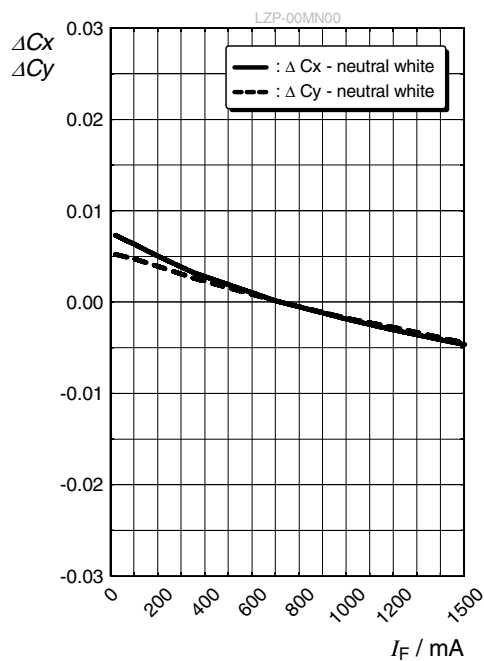


### Forward Voltage <sup>5)</sup>

$$\Delta V_F = V_F - V_F(25\text{ °C}) = f(T_j); I_F = 700\text{ mA}$$

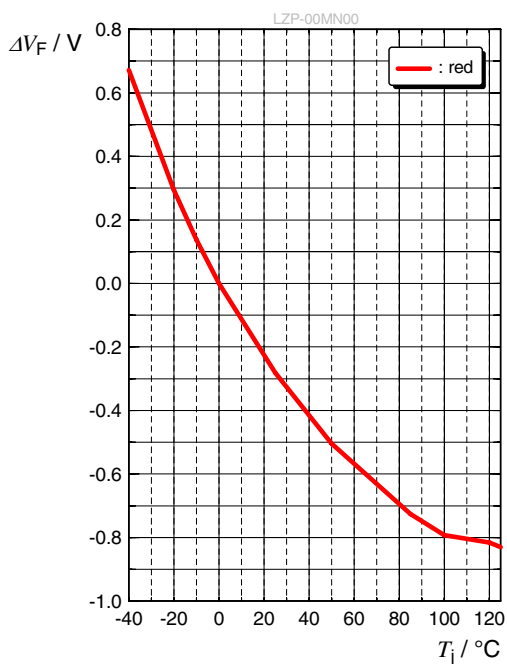


### Forward Voltage <sup>5)</sup>

$$\Delta V_F = V_F - V_F(25\text{ °C}) = f(T_j); I_F = 700\text{ mA}$$

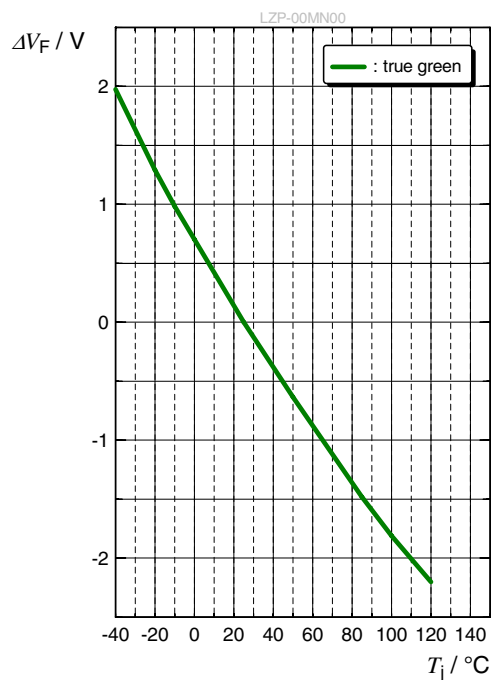


### Forward Voltage <sup>5)</sup>

$$\Delta V_F = V_F - V_F(25\text{ °C}) = f(T_j); I_F = 700\text{ mA}$$

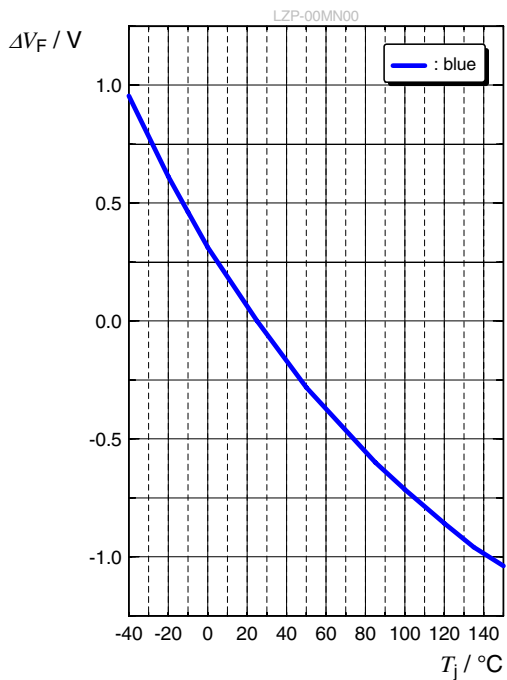


### Forward Voltage <sup>5)</sup>

$$\Delta V_F = V_F - V_F(25\text{ °C}) = f(T_j); I_F = 700\text{ mA}$$

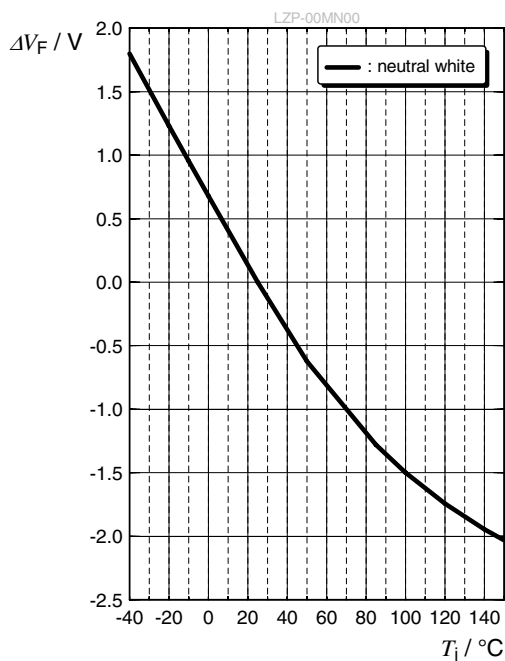


### Relative Luminous Flux <sup>5)</sup>

$$\Phi_v / \Phi_v(25^\circ\text{C}) = f(T_j); I_F = 700\text{ mA}$$

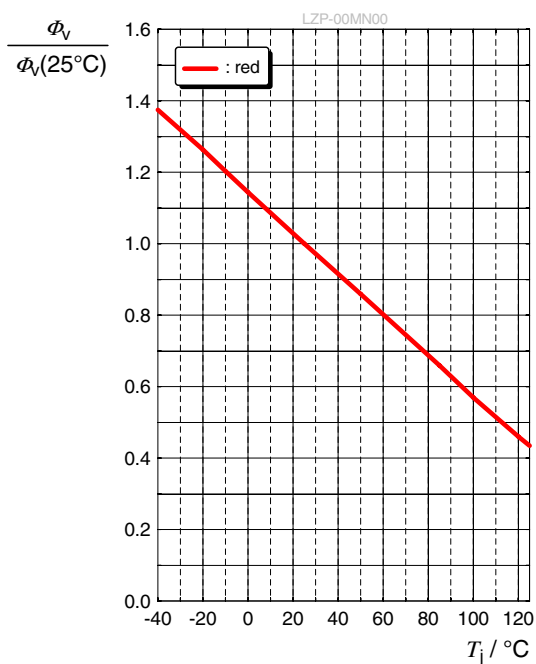


### Relative Luminous Flux <sup>5)</sup>

$$\Phi_v / \Phi_v(25^\circ\text{C}) = f(T_j); I_F = 700\text{ mA}$$

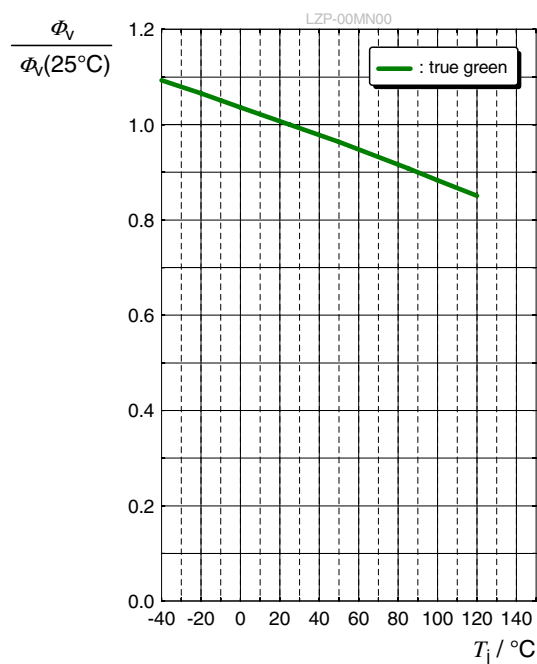


### Relative Luminous Flux <sup>5)</sup>

$$\Phi_v / \Phi_v(25^\circ\text{C}) = f(T_j); I_F = 700\text{ mA}$$

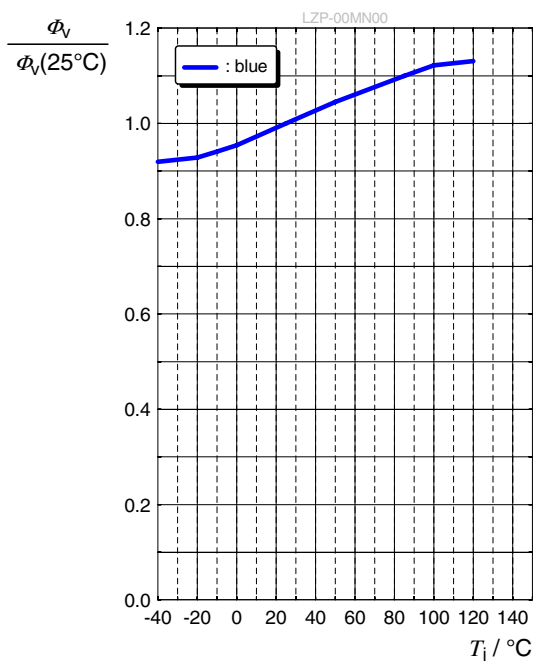


### Relative Luminous Flux <sup>5)</sup>

$$\Phi_v / \Phi_v(25^\circ\text{C}) = f(T_j); I_F = 700\text{ mA}$$

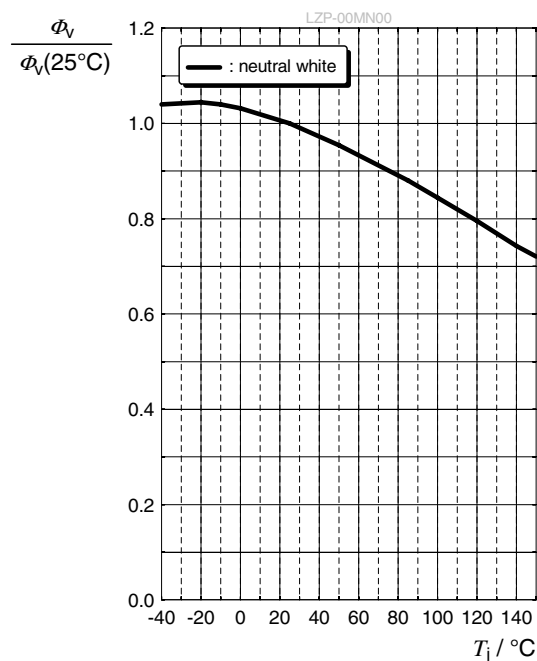


### Dominant Wavelength <sup>5)</sup>

$$\Delta\lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25\text{ °C}) = f(T_j); I_F = 700\text{ mA}$$

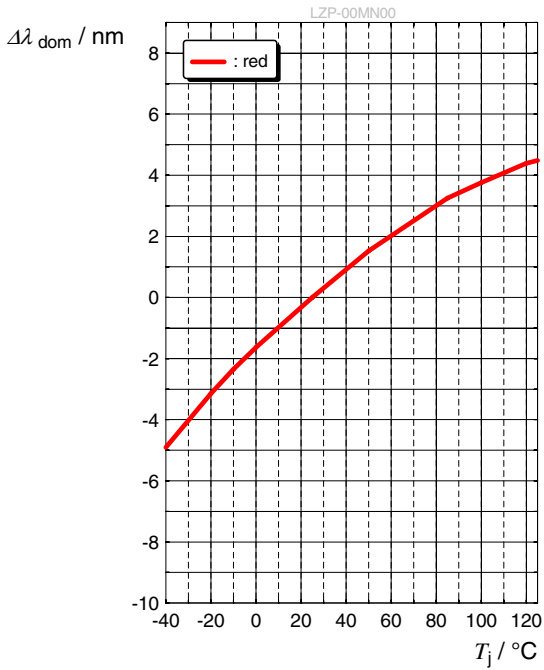


### Dominant Wavelength <sup>5)</sup>

$$\Delta\lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25\text{ °C}) = f(T_j); I_F = 700\text{ mA}$$

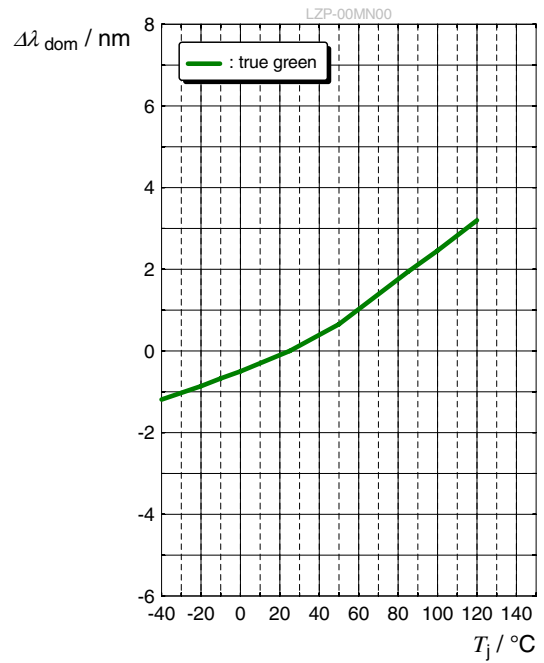


### Dominant Wavelength <sup>5)</sup>

$$\Delta\lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25\text{ °C}) = f(T_j); I_F = 700\text{ mA}$$

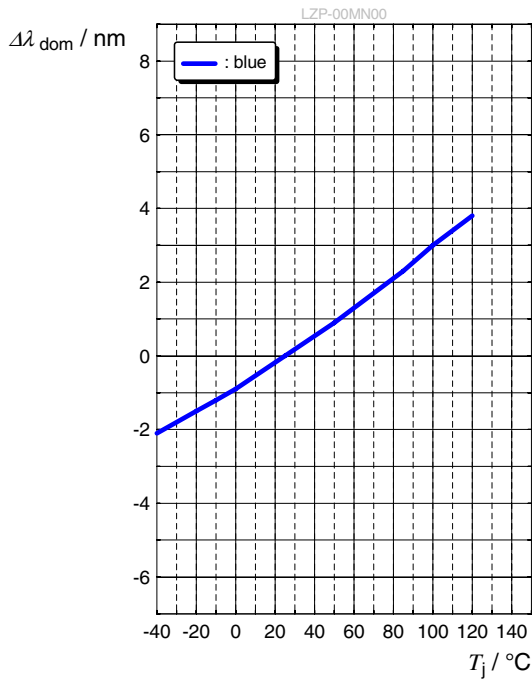


### Chromaticity Coordinate Shift <sup>5)</sup>

$$\Delta Cx, \Delta Cy = f(T_j); I_F = 700\text{ mA}$$

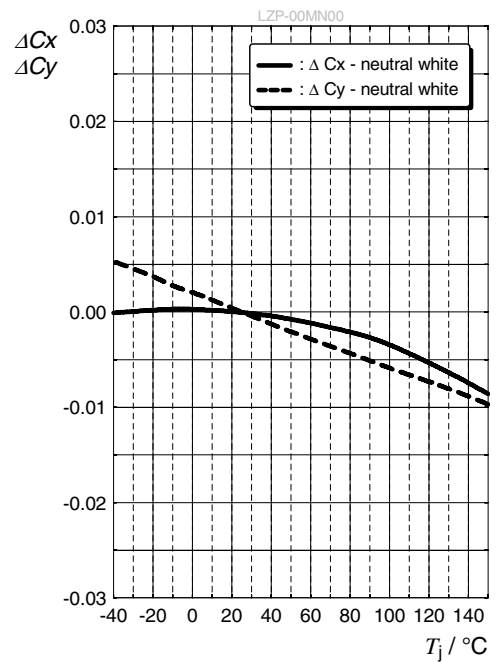


## Max. Permissible Forward Current

$$I_F = f(T)$$

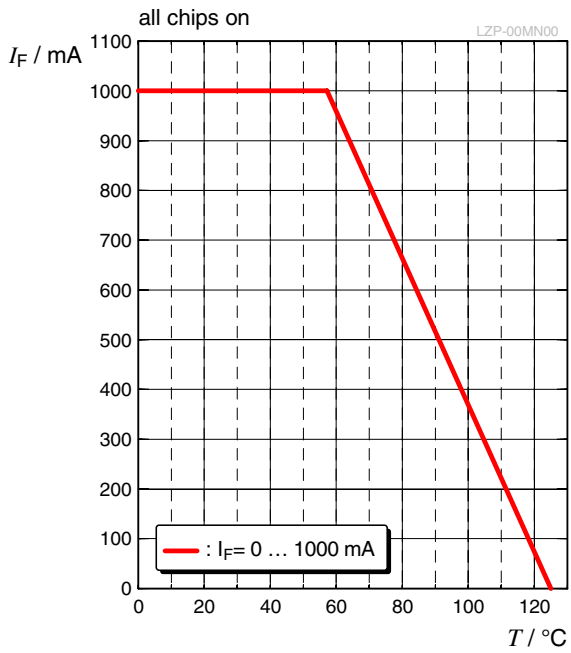



## Dimensional Drawing <sup>10)</sup>

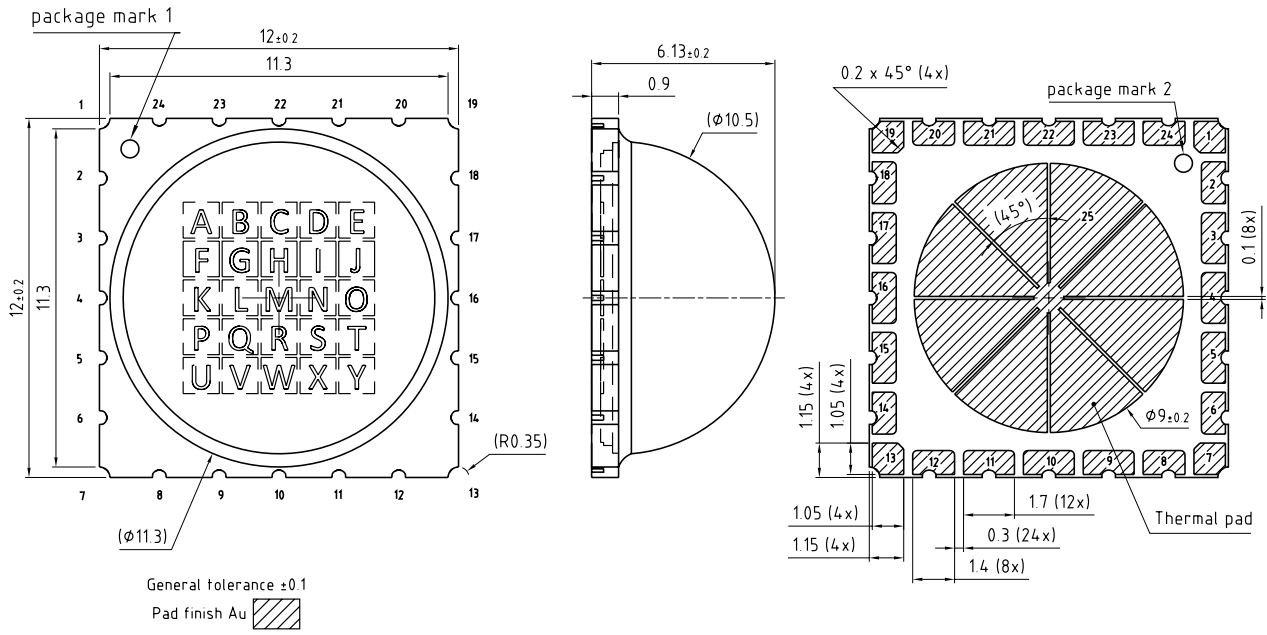

C67062-A0386-A1-01


## Further Information:

**Approximate Weight:** 1,249.0 mg

## Electrical Internal Circuit

| Pin Out  |         |          |
|--|---------|----------|
| Pad  | Channel | Function |
| 18   | 1       | Anode    |
| 2  |         | Cathode  |
| 17   | 2       | Anode    |
| 3  |         | Cathode  |
| 15   | 3       | Anode    |
| 5  |         | Cathode  |
| 14   | 4       | Anode    |
| 6  |         | Cathode  |
| DNC pins :<br>1,4,7,8,9,10,11,12,13,16,19,20,21,22,23,24 |         |          |


Note :  
DNC = Do Not Connect (Electrically Non Isolated)

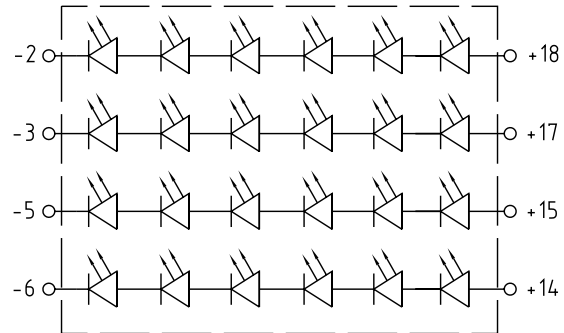


| Pin   | Description                             |
|-------|---|
| 2, 18 | Die B, I, K, R, T, U - red              |
| 3, 17 | Die E, F, H O, Q, X - true green        |
| 5, 15 | Die A, C, J, L, S, V - blue             |
| 6, 14 | Die D, G, M, N, P, W, Y - neutral white |

Recommended Solder Pad <sup>10)</sup>

Pedestal MCPCB Design

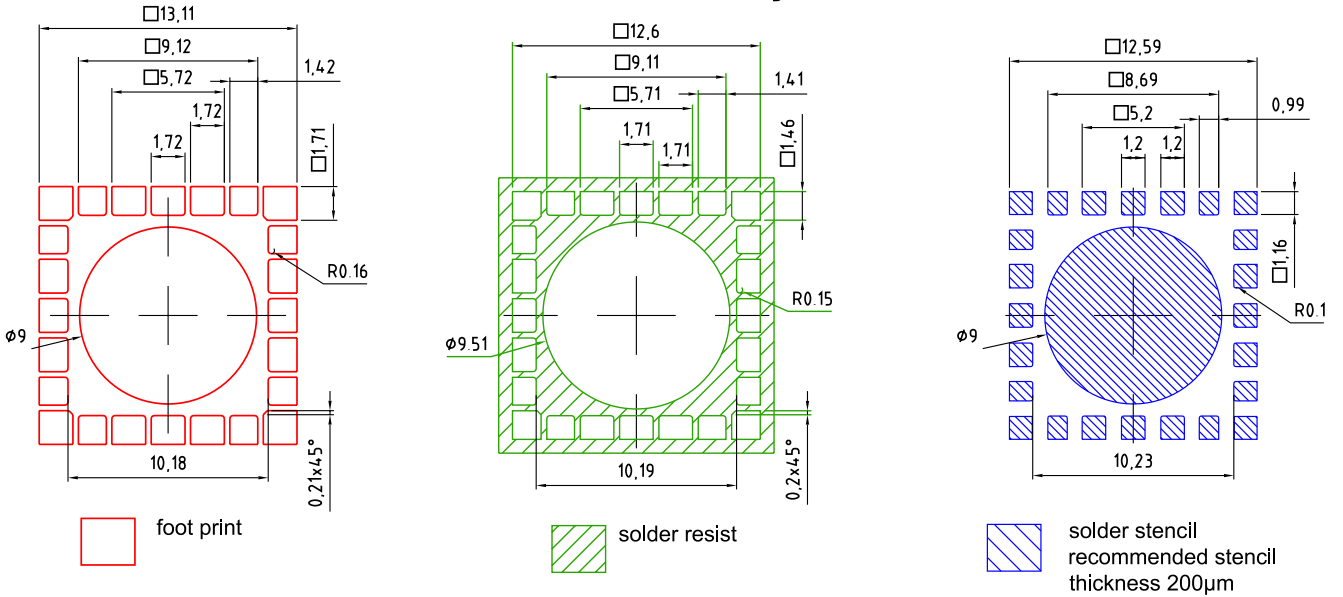

Component Location on Pad

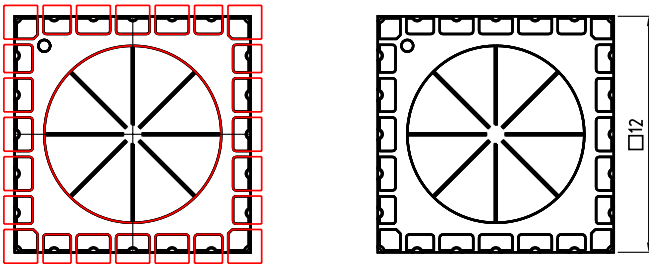


E062.3010.303-01

1. For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere.
2. Package not suitable for ultra sonic cleaning.
3. Pedestal MCPCB allows the emitter thermal slug to be soldered directly to the metal core of the MCPCB. Such MCPCB eliminate the high thermal resistance dielectric layer that standard MCPCB technologies use in between the emitter thermal slug and the metal core of the MCPCB, thus lowering the overall system thermal resistance.
4. X-ray sample monitoring for solder voids underneath the emitter thermal slug is recommended. The total area covered by solder voids should be less than 20% of the total emitter thermal slug area. Excessive solder voids will increase the emitter to MCPCB thermal resistance and may lead to higher failure rates due to thermal over stress.

## Reflow Soldering Profile

Product complies to MSL Level 1 acc. to JEDEC J-STD-020E

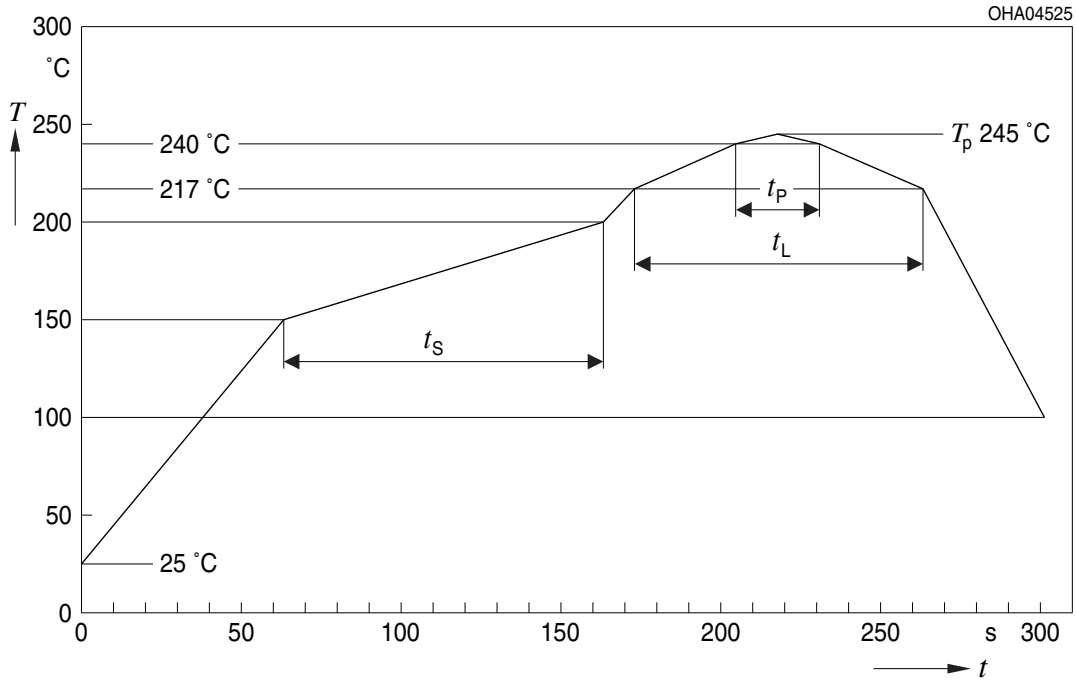


| Profile Feature  | Symbol | Pb-Free (SnAgCu) Assembly |                |         | Unit |
|--|--------|---------------------------|----------------|---------|------|
|  |        | Minimum                   | Recommendation | Maximum |      |
| Ramp-up rate to preheat <sup>*)</sup><br>25 °C to 150 °C       |        |                           | 2              | 3       | K/s  |
| Time $t_s$<br>$T_{Smin}$ to $T_{Smax}$                         | $t_s$  | 60                        | 100            | 120     | s    |
| Ramp-up rate to peak <sup>*)</sup><br>$T_{Smax}$ to $T_p$      |        |                           | 2              | 3       | K/s  |
| Liquidus temperature   | $T_L$  |                           | 217            |         | °C   |
| Time above liquidus temperature                                | $t_L$  |                           | 80             | 100     | s    |
| Peak temperature   | $T_p$  |                           | 245            | 250     | °C   |
| Time within 5 °C of the specified peak temperature $T_p - 5$ K | $t_p$  | 10                        | 20             | 30      | s    |
| Ramp-down rate*<br>$T_p$ to 100 °C                             |        |                           | 3              | 4       | K/s  |
| Time<br>25 °C to $T_p$   |        |                           |                | 480     | s    |

All temperatures refer to the center of the package, measured on the top of the component

\* slope calculation  $DT/Dt$ :  $Dt$  max. 5 s; fulfillment for the whole T-range

Taping <sup>10)</sup>

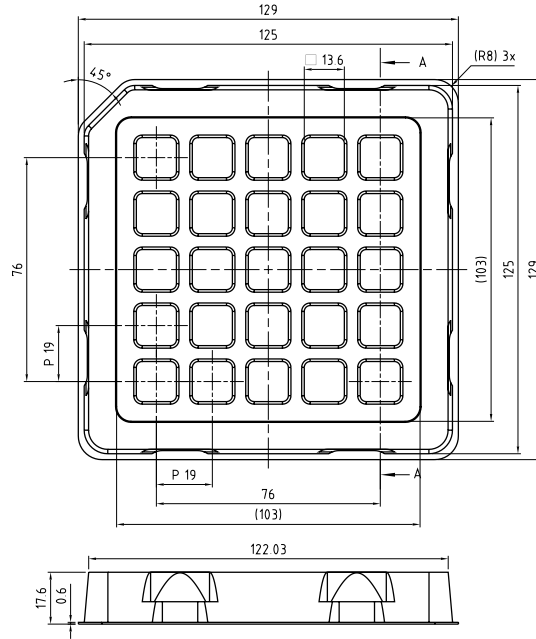

C67062-A0384-X2-01

Barcode-Product-Label (BPL)

**OSRAM**  
Opto Semiconductors  
Our Brand


**LED ENGINE**


(6P) Batch No: 1234567890  
(1T) Lot No: 1234567890  
(X) Prod No: 12345678  
(9D) D/C : 1234  
(Q) Qty: 9999  
CoO: XX

LXX-XXXXX BIN1: XXX-X-X-XXX  
XxxXxx BIN2: XXX-X-X-XXX  
RoHS Compliant BIN3: XX-X-X-XXX  
BIN4: XXX-XXX-X-XXX  
BIN5: X-XX-X-XXX  
BIN6: X-XX-X-XXX

ML TEMP ST  
X XXX° X

Pack: RXX  
B\_X123\_12345.1234  
001





---

## Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet fall into the class **moderate risk (exposure time 0.25 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

Tapes and reels are shipped in airtight bags in order to reduce the onset of silver tarnish. We recommend bags only be opened when ready to use emitters. Partially used reels or trays should be stored in airtight bags or in storage purged with nitrogen.

Based on very short life cycle times in chip technology this component is subject to frequent adaption to the latest chip technology.

Changes to the content of this datasheet may occur without further notification. JEDEC 46C constitutes the guideline of the change management for the device specified in this document.

For further application related information please visit [www.osram-os.com/appnotes](http://www.osram-os.com/appnotes)

## Disclaimer

### Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on our website.

### Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

### Product and functional safety devices/applications or medical devices/applications

Our components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

Our products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using our components in product safety devices/ applications or medical devices/applications, buyer and/or customer has to inform our local sales partner immediately and we and buyer and /or customer will analyze and coordinate the customer-specific request between us and buyer and/or customer.

---

## Glossary

- 1) **Brightness:** Brightness groups are tested at a current pulse duration of 10 ms and a tolerance of  $\pm 10\%$ .
- 2) **Operating Conditions:** Operating conditions according DC-derating (Max. Permissible Forward Current)
- 3) **Reverse Operation:** Not designed for reverse operation. Continuous reverse operation can cause migration and damage of the device.
- 4) **Chromaticity coordinate groups:** Chromaticity coordinate groups are tested at a current pulse duration of 10 ms and a tolerance of  $\pm 0.01$ .
- 5) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 6) **Wavelength:** Wavelengths are tested at a current pulse duration of 10 ms and a tolerance of  $\pm 1$  nm.
- 7) **Forward Voltage:** Forward voltages are tested at a current pulse duration of 10 ms and a tolerance of  $\pm 0.1$  V.
- 8) **Color reproduction index:** Color reproduction index values (CRI-RA) are measured during a current pulse of typically 25 ms, with an internal reproducibility of  $\pm 2$  and an expanded uncertainty of  $\pm 3$  (acc. to GUM with a coverage factor of  $k = 3$ ).
- 9) **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- 10) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with  $\pm 0.1$  and dimensions are specified in mm.



---

## Revision History

| Version | Date       | Change               |
|---------|------------|----------------------|
| 1.0     | 2022-02-04 | New Layout           |
| 1.1     | 2022-06-03 | New Layout<br>Taping |

---



EU RoHS and China RoHS compliant product

此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，  
不含有毒有害物质或元素。

**Published by ams-OSRAM AG**

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

[ams-osram.com](http://ams-osram.com)

© All rights reserved

**am** 

**OSRAM**