



- Low Cost
- 5V to 48V Outputs
- Universal Input
- Compact Size
- NEC Class 2 Compliant
- UL508 Listed
- -10°C to +71°C Operation

DPP15-100 Series

15-100W, 5-48V Output

DIN Rail Mount Power Supplies

Key Market Segments & Applications

- Industrial Controls: Motor Control Systems
- Factory Automation: Process Control, Automotive, Chemical Processing
- Test & Measurement: Burn in & Test, Instrumentation Measurement

DPP15-100 Features and Benefits

Features

- PFC Compliant to EN61000-3-2
- UL508 Approvals
- TS35/7.5 or TS35/15 DIN Rail Mounting

Benefits

- Supports Global Use
- Easier System Configuration
- Easy System Integration

Specifications

ITEMS	MODELS	DPP15				DPP25/30				DPP50				DPP100			
AC Input Voltage range	(1) VAC	85 - 264VAC												85 - 132VAC		176 - 264VAC	
Input Frequency	Hz	47 - 63Hz															
Inrush Current (115 / 230VAC)	A	<35A		35 / 45A		35 / 50A		35 / 55A									
Power Factor	-	Meets EN61000-3-2 Class A															
Max Input Current (230VAC)	A	0.25		0.4		0.7		1.2									
Output Voltage Accuracy	%	±1% (24V outputs preset at 24.5V)															
Line Regulation	%	< 0.5%															
Load Regulation	%	< 0.5%															
Ripple/Noise	mV	<50mV (20MHz Bandwidth)															
Overcurrent Protection (Typ)	-	>120%															
Overvoltage Protection	V	125 - 137.5%															
Hold Up Time (115VAC input)	ms	> 20ms															
Parallel switch	-	No												Yes			
LED Indicator	-	Green LED = On															
Operating Temperature	-	-10°C to +71°C (Derate linearly 5%/°C from 61°C to 71°C)															
Storage Temperature	-	-25°C to +85°C															
Operating Humidity	-	20 - 90% RH (non condensing)															
Cooling	(2) -	Convection															
Withstand Voltage	-	Input to Output 3kVAC for 1 min.															
Shock	-	Half sine wave, 4G, 22ms, 3 times per face, X, Y, Z															
Vibration	-	10-500Hz (20 min sweep) 0.002G ² /Hz, 1Grms acceleration X, Y, Z, 1 hour															
Isolation Resistance	Ω	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC															
Safety Agency Approvals	-	IEC/UL/CSA/EN60950-1, 60950-1, UL508, UL1310(3) (Class 2), CE Mark															
Emissions	-	EN55011, EN55032 Class B Radiated & Conducted, EN61000-6-3															
Immunity	-	EN61000-6-2, EN61000-4-2 Level 4, EN61000-4-3, EN61000-4-6 Level 3															
		EN61000-4-4 Level 4 (I/P) Level 3 (O/P), EN61000-4-5 Level 3 L-N, Level 4 L/N-PE, EN61000-4-8, EN61000-4-11															
Weight (Typ)	g	130		260		390											
Size (WxHxD)	mm	23 x 75 x 97		45 x 75 x 91		73 x 75 x 97											
Case material	-	Plastic															
MTBF (MIL-HDBK-217F, GF25)	Hours	287,000		>288,000		273,000		239,000									
Warranty	yrs	3															

(1) Auto Select - DPP100 only

(3) Does not include DPP25-5 & DPP100-24 models. Evaluated to NEC NFPA70 Class 2 output per UL1310.

(2) Recommend 25mm clearance on all sides.

Model Selector						
Model	Output Voltage (V)	Output Adjust (V)	Output Curr. (A)	Max. Output Power (W)	Efficiency at Full Load (%)	
DPP25-5	5	5-6	5	25	78	
DPP30-12	12	9.9-12.1	2.5	30	82	
DPP50-15	15	11.9-15.1	3.4	50	85	
DPP15-24	24	22.5-28.5	0.63	15	80	
DPP30-24	24	22.5-28.5	1.3	30	84	
DPP50-24	24	22.5-28.5	2.1	50	86	
DPP100-24	24	22.5-28.5	4.2	100	87	
DPP50-48	48	48-56	1.05	50	87	

Installation


Snap-on Mounting - snap onto DIN Rail TS35/7.5 or TS35/15 (no tools required)

Cooling - Normal Convection


Clearance - 25mm all sides

Connection - Use copper wire 0.5-2.5mm² (AWG24-12)


Outline Drawing DPP15 Series

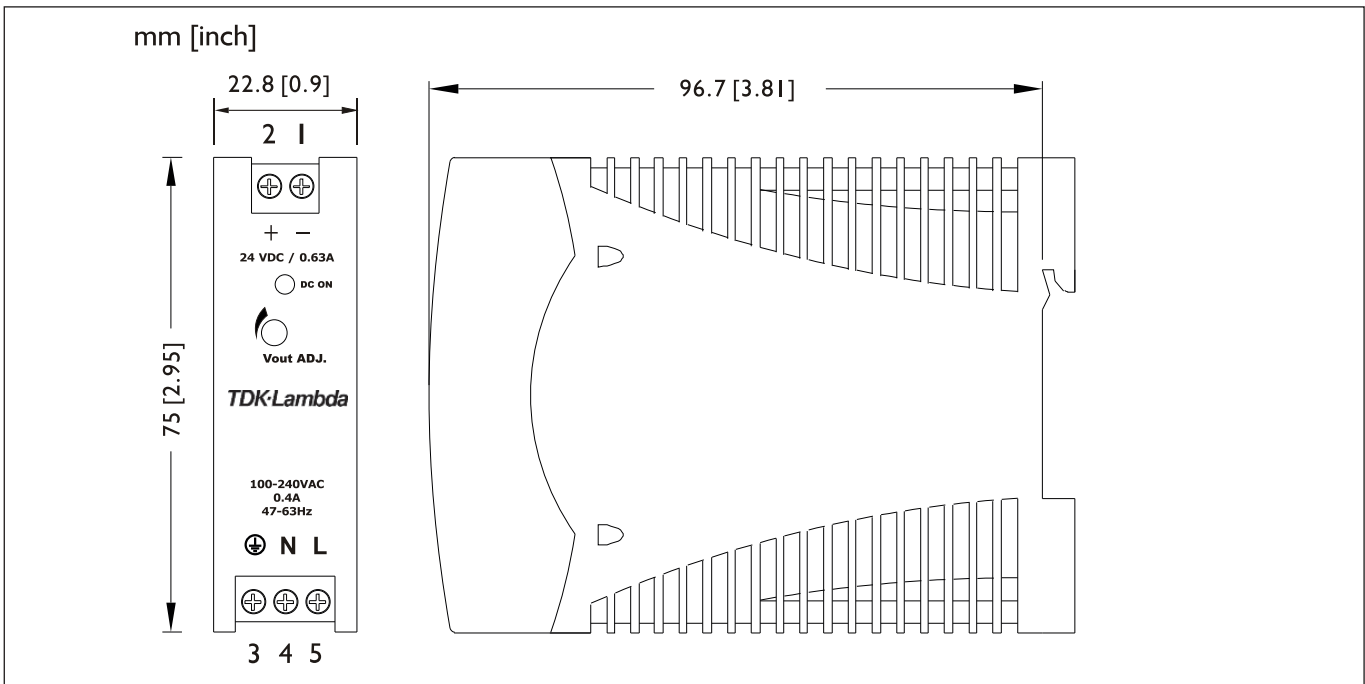

Outline Drawing DPP25-DPP50 Series

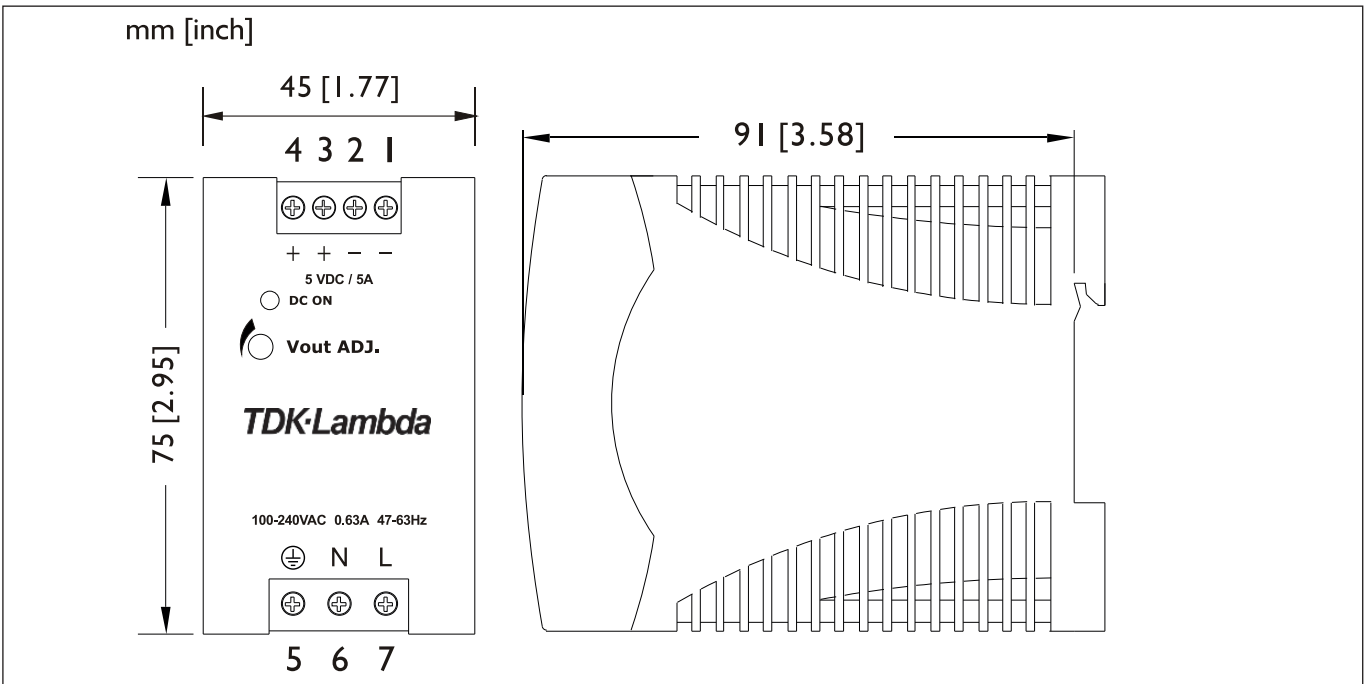

Outline Drawing DPP100 Series

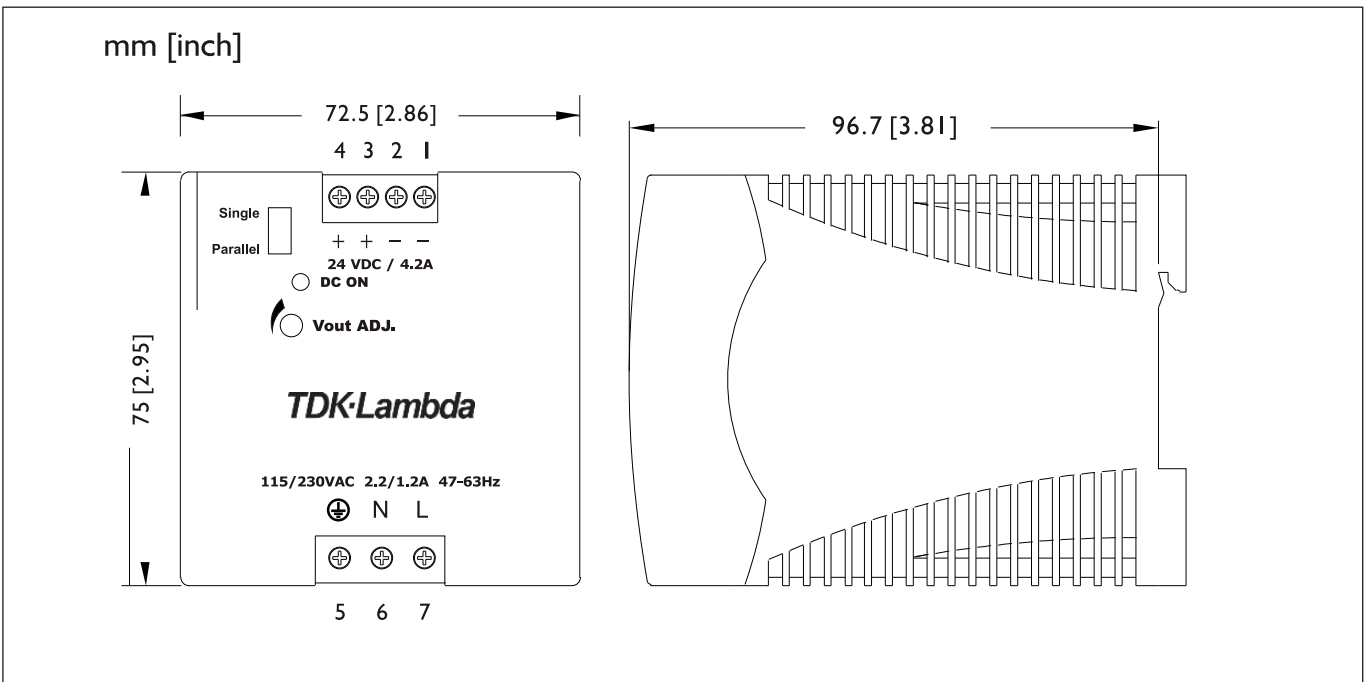



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
tlf.fr.powersolutions@tdk.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
tlf.it.powersolutions@tdk.com
www.emea.lambda.tdk.com/it



Netherlands

tlf.nl.powersolutions@tdk.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
tlg.powersolutions@tdk.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
tlg.at.powersolutions@tdk.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
tlg.ch.powersolutions@tdk.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
tlg.dk.powersolutions@tdk.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
tlu.powersolutions@tdk.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
tli.powersolutions@tdk.com
www.emea.lambda.tdk.com/il-en



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tla.powersolutions@tdk.com
www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
tfc.powersolutions@tdk.com
www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tfs.marketing@tdk.com
www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com

