THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-16-001548	23FEB2016	AP	DG

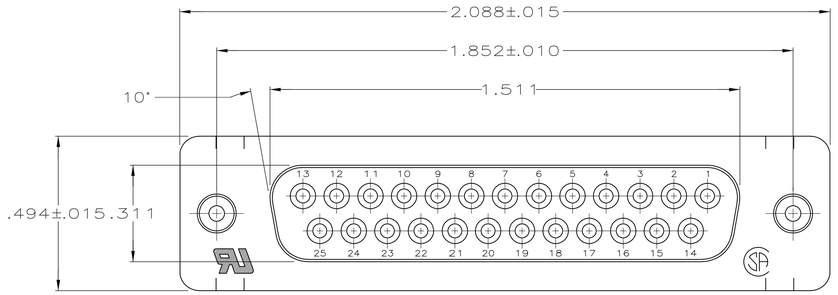

1. HOUSING: FLAME RETARDANT, 94V-0 RATED, THERMOPLASTIC;
   COLOR: BLACK
   SHELL: CARBON STEEL
   CONTACTS: PHOS BRONZE.
   INSERT BOARDLOCKS: BRASS.
2. SHELL: 000200 MIN TIN OVER .000100 MIN COPPER.
   CONTACTS: SEE TABLE.
   INSERT BOARDLOCKS: .000150 MIN TIN OVER .000100 MIN COPPER.
3. GOLD FLASH FOR LENGTH OF .100 MIN FROM MATING END, .000100 MIN TIN ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
4. .000030 MIN GOLD FOR LENGTH OF .100 MIN FROM MATING END, .000100 MIN TIN ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
5. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
6. .110 MAX IN SHELL TAB CLINCH AREAS.

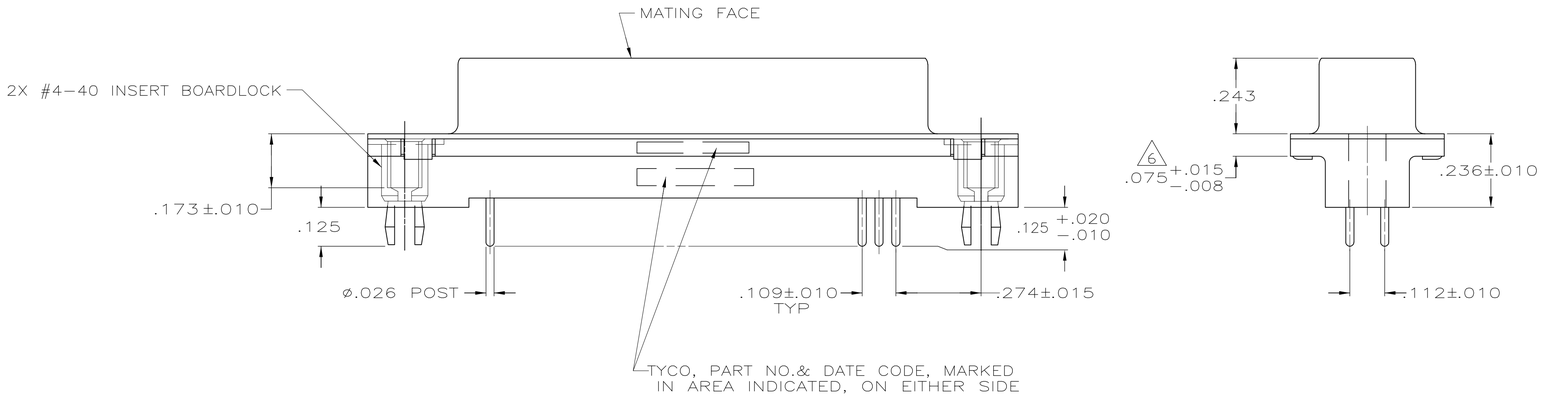

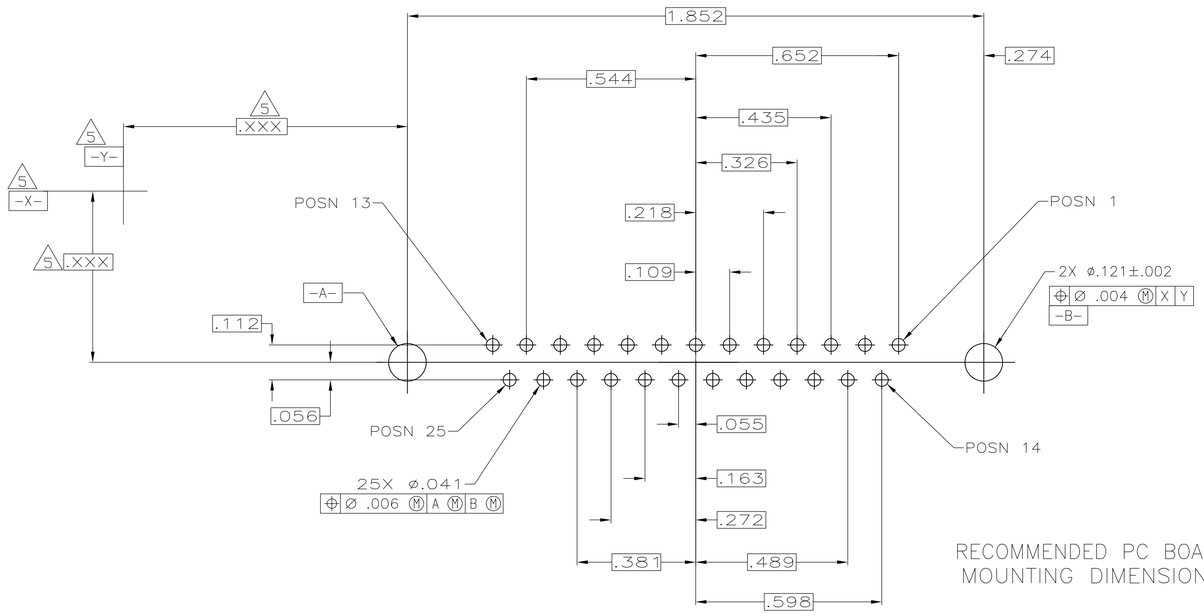

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

COPYRIGHT 2005
TYCO ELECTRONICS CORP
ALL RIGHTS RESERVED

4	2-5747708-0
3	1-5747708-9
CONTACT FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL 1

FINISH 2

DWN B. LATTUCA 27SEPT05
CHK S. BOLASH 27SEPT05
APVD M. WALMSLEY 27SEPT05
PRODUCT SPEC 108-40025
APPLICATION SPEC 114-40023
WEIGHT -

TE Connectivity

NAME: RECEPTACLE ASSEMBLY, SIZE 3, 25 POS., VERTICAL, .026 DIA. POSTS, FRONT SHELL, RETENTION INSERTS, AMPLIMITE HD-20

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5747708	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B