

**Ratings**

Voltage: 300 V  
 Temperature: -25 to 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 5  
 Gauge: 26 AWG 0.14 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: Ø 0.16 mm x 7  
 Resistance at 20 °C: 150 Ω /km max

**Insulator**

Material: PVC  
 Color: red, black, white, yellow, blue  
 Diameter: Ø 1.1 ±0.10 mm  
 Nominal thickness: 0.29 mm  
 Resistance at 20 °C: 10 MΩ /km min

**Filler**

Material: cotton rope



**Outer jacket**

Material: PVC  
 Color: white  
 Diameter: Ø 4.8 ±0.30 mm  
 Nominal thickness: 0.9 mm

**Wire marking:** E339579 UL AWM STYLE 2464 26 AWG 80°C  
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113 ±2 °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Heat shock: 121 ±1 °C /1 hour, no observed degradation  
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %  
 Cold bend: -10 ±2 °C /1 hour, no observed cracking

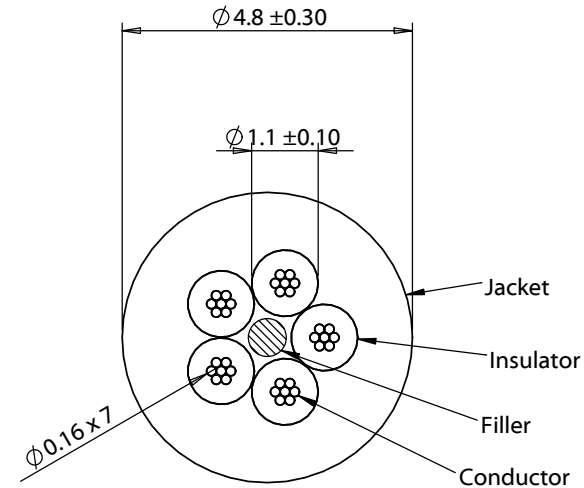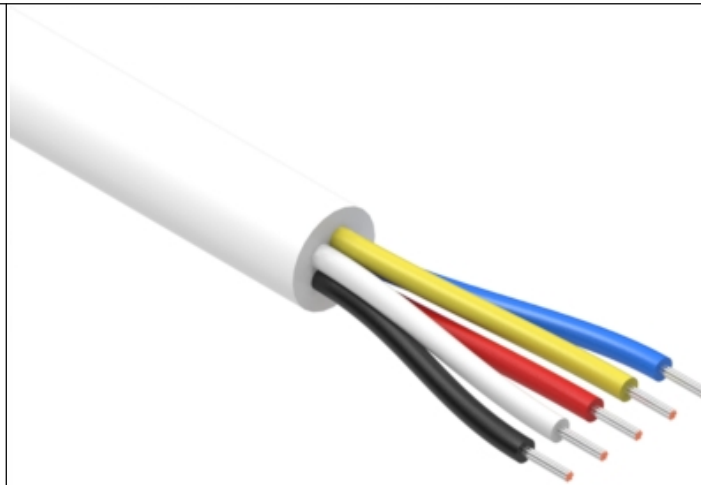

Revision:	Date:	Description:
A	5/15/2019	Initial release

Prepared: <b>AW</b> <small>Digitally signed by AW Date: 2019.05.15 12:12:06 -07'00'</small>
Verified: <b>JP</b> <small>Digitally signed by JP Date: 2019.05.17 09:14:11 -07'00'</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm

Notes: RoHS compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 5C TS, 26 AWG, UL2464, 300V, 80C, 4.8 mm, VW-1, PVC, 60P, white

<h1>TENSILITY</h1>	
<small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>	
Size: A	Part number: <b>30-01284</b>
Scale: 8:1	
Sheet 1 of 1	

5

4

3

2

1