

# SMD Multilayer Chip Varistor

AMCV-1812H

RoHS  
Compliant



4.5 x 3.2 x 2.5mm

## FEATURES:

- SMD type, small size suitable for high density mounting
- Excellent clamping ratio and strong capability of voltage surge suppression
- Excellent solderability (Ni, Sn plating)

## APPLICATIONS:

- Transient voltage protection and voltage surge suppression for LED lighting
- Suitable for LCD-TV, STB, Switch, Router, PLC, Security System, smart meters, mobile phones
- Suppressing Induced / switching over-voltage caused by lightning and power
- Protecting DC-DC Module, I/O ports, IC driver

## STANDARD SPECIFICATIONS:

**Operating Temperature:** -55°C ~ +85°C

**Storage Temperature:** -10°C ~ +40°C and RH 70% (Max.)

| Part Number    | Max. Working Voltage |                  | Varistor Voltage    | Max. Clamping Voltage |                | Rated Single Pulse Transient |                     | Typical Capacitance       |
|----------------|----------------------|------------------|---------------------|-----------------------|----------------|------------------------------|---------------------|---------------------------|
|                | DC                   | AC RMS           |                     | 8/20µs                | ESD            | Energy 10/1000µs             | Peak Current 8/20µs |                           |
| Test Condition | <20µA                |                  | @1mA DC             | 8/20µs                | ESD            | Energy 10/1000µs             | Peak Current 8/20µs | @1V <sub>rms</sub> , 1kHz |
| Units          | Volts                | Volts            |                     |                       |                |                              |                     |                           |
| Symbol         | V <sub>WDC</sub>     | V <sub>WAC</sub> | V <sub>B</sub>      | V <sub>C</sub>        | I <sub>C</sub> | E <sub>T</sub>               | I <sub>P</sub>      | C <sub>P</sub>            |
| AMCV-1812H-5R5 | 5.5                  | 4.0              | 12.0 [10.0-14.0]    | 18                    | 5.0            | 1.0                          | 800                 | 5500                      |
| AMCV-1812H-090 | 9                    | 6.4              | 14.0 [12.0-16.0]    | 20                    | 5.0            | 1.2                          | 800                 | 4800                      |
| AMCV-1812H-120 | 12                   | 8.5              | 16.0 [13.0-19.0]    | 25                    | 5.0            | 1.5                          | 800                 | 4200                      |
| AMCV-1812H-140 | 14                   | 10.0             | 19.0 [16.0-22.0]    | 30                    | 5.0            | 1.9                          | 800                 | 3800                      |
| AMCV-1812H-180 | 18                   | 12.7             | 25.0 [22.0-28.0]    | 40                    | 5.0            | 2.3                          | 800                 | 3200                      |
| AMCV-1812H-220 | 22                   | 15.6             | 30.0 [26.0-34.0]    | 45                    | 5.0            | 2.5                          | 800                 | 2400                      |
| AMCV-1812H-260 | 26                   | 18.4             | 35.0 [31.0-38.0]    | 58                    | 5.0            | 3.0                          | 800                 | 2000                      |
| AMCV-1812H-300 | 30                   | 21.3             | 42.0 [37.0-46.0]    | 65                    | 5.0            | 3.7                          | 800                 | 1500                      |
| AMCV-1812H-380 | 38                   | 30.0             | 50.0 [46.0-54.0]    | 75                    | 5.0            | 4.2                          | 800                 | 1100                      |
| AMCV-1812H-480 | 48                   | 34.1             | 60.0 [54.0-67.0]    | 100                   | 5.0            | 4.0                          | 600                 | 900                       |
| AMCV-1812H-560 | 56                   | 40.0             | 68.0 [61.0-75.0]    | 120                   | 5.0            | 4.3                          | 600                 | 800                       |
| AMCV-1812H-600 | 60                   | 46.0             | 76.0 [69.0-83.0]    | 130                   | 5.0            | 4.3                          | 600                 | 600                       |
| AMCV-1812H-650 | 65                   | 50.0             | 82.0 [73.0-91.0]    | 140                   | 5.0            | 4.0                          | 600                 | 500                       |
| AMCV-1812H-750 | 75                   | 55.0             | 94.0 [85.0-103.0]   | 160                   | 5.0            | 4.0                          | 600                 | 400                       |
| AMCV-1812H-850 | 85                   | 60.0             | 100.0 [90.0-110.0]  | 170                   | 5.0            | 4.0                          | 600                 | 300                       |
| AMCV-1812H-101 | 100                  | 75.0             | 120.0 [108.0-132.0] | 200                   | 5.0            | 4.0                          | 600                 | 200                       |

Unless otherwise specified, the standard atmospheric conditions for measurement/test as:

- Ambient Temperature: 20±15°C
- Relative Humidity: 65±20%
- Air Pressure: 86 kPa to 106 kPa


| Items  | Test Methods and Remarks                                      |
|--|---|
| Varistor Voltage at 1mA DC (V <sub>B</sub> ) | Measuring current: 1mA DC<br>Duration: 0.2 to 2 sec           |
| Capacitance (C)                              | Measure source: 1.0 V <sub>RMS</sub><br>Test frequency: 1kHz. |
| Clamping Voltage (V <sub>C</sub> )           | Measuring source: 8/20us waveform                             |

ABRACON IS  
ISO 9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 11.24.12**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

# SMD Multilayer Chip Varistor



4.5 x 3.2 x 2.5mm

AMCV-1812H

**RoHS**  
Compliant

## OPTIONS AND PART IDENTIFICATION:

AMCV-1812H--


### Voltage Code

Please refer to the table above


### Packaging

T: Tape and Reel  
(2kpcs / reel)

## V/I CHARACTERISTICS

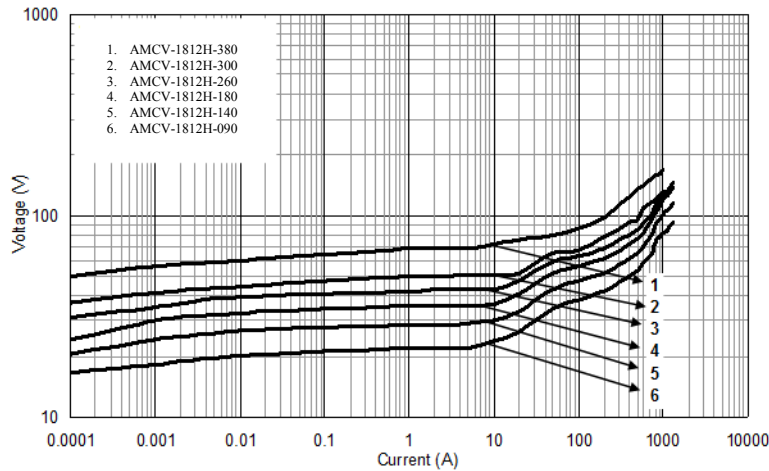

## OUTLINE DIMENSION:

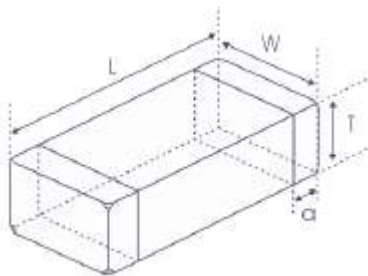

| L        | W        | T       | a        |
|----------|----------|---------|----------|
| 4.5±0.40 | 3.2±0.30 | 2.5Max. | 0.25~1.0 |


## Recommended Land Pattern



| A       | B       | C       |
|---------|---------|---------|
| 2.8~3.0 | 1.5~1.8 | 3.3~3.6 |

Dimension: mm

# SMD Multilayer Chip Varistor




4.5 x 3.2 x 2.5mm

AMCV-1812H

**RoHS**  
Compliant

## Materials

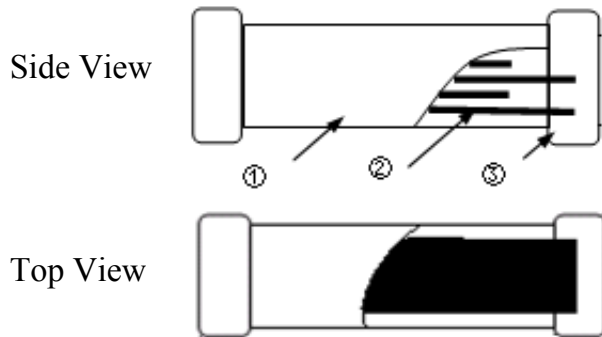

|   | Part Name          | Material                                |
|---|--------------------|---|
| 1 | Base Material      | ZnO                                     |
| 2 | Internal Conductor | Ag-Pd                                   |
| 3 | Terminal Electrode | Ag (Inner layer)<br>Ni-Sn (Outer layer) |



## REFLOW PROFILE:




|                             |                               |
|-----------------------------|-------------------------------|
| Preheat Condition           | 150 to 200 °C; 60 to 120 sec. |
| Allowed time above 217 °C   | 60 to 90 sec.                 |
| Max temperature             | 260 °C                        |
| Max time at max temperature | 10 sec.                       |
| Solder paste                | Sn/3.0Ag/0.5Cu                |
| Allowed Reflow time         | 2x max.                       |

# SMD Multilayer Chip Varistor

AMCV-1812H


RoHS  
Compliant




4.5 x 3.2 x 2.5mm

## TAPE & REEL:

T: 2,000pcs / reel

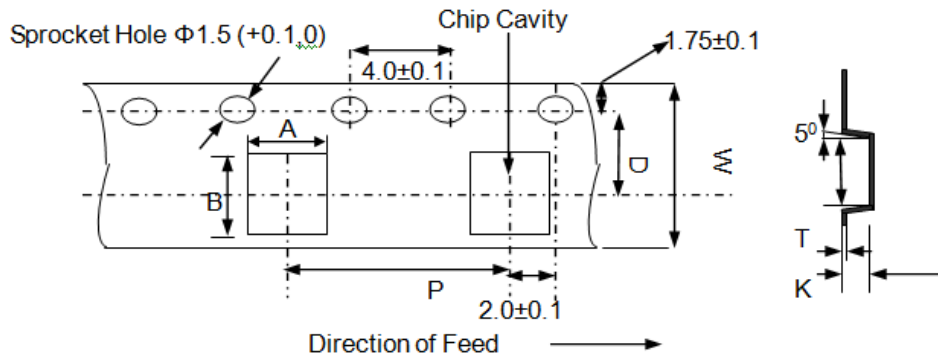

| W    | A    | B    | D    | P   | K max | T max |
|------|------|------|------|-----|-------|-------|
| 12.0 | 3.50 | 4.80 | 5.50 | 8.0 | 2.7   | 0.33  |

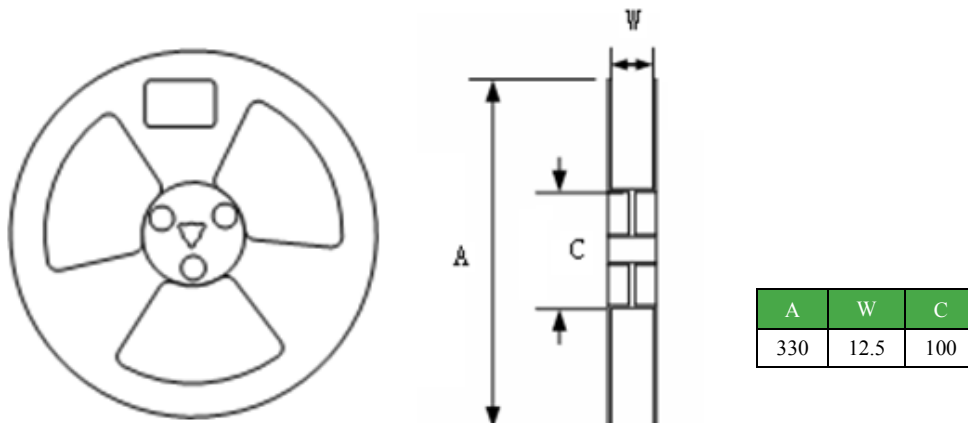

## Storage Conditions

- The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to high humidity. Package must be stored at 40°C or less and 70% RH or less.
- The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to dust or harmful gas (e.g. HCl, sulfurous gas of H<sub>2</sub>S).
- Packaging material may be deformed if packages are stored where they are exposed to heat or direct sunlight.
- Solderability shall be guaranteed for 6 months from the date of delivery on condition that they are stored at the environment specified in 1.3. The parts that are stored more than 6 months shall be checked for solderability before use.

**Dimension: mm**

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO 9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 11.24.12**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)