



MMIC SURFACE MOUNT

Power Splitter/Combiner

GP2Y1+

2 Way-0° 50Ω 1550 to 4400 MHz

FEATURES

- Wide bandwidth, 1550 to 4400 MHz
- Excellent isolation, 20 dB typ.
- Excellent amplitude unbalance, 0.04 dB typ.
- Good phase unbalance, 0.6 deg. typ.
- Small size, 0.118"x0.118"x0.035"
- High ESD level
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- WCDMA
- DCS
- Radar
- Navigation
- Instrumentation
- Korea PCS
- WiMax

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		1550		4400	MHz
Insertion Loss* (above 3.0 dB)	1550-4400	—	1.0	1.9	dB
Isolation	1550-4400	12	20	—	dB
Amplitude Unbalance	1550-4400	—	—	0.3	dB
Phase Unbalance	1550-4400	—	—	6.0	deg.
VSWR (Port S)	1550-4400	—	1.4	—	:1
VSWR (Ports 1,2)	1550-4400	—	1.4	—	


* De-embedded from demo board loss.

MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-40°C to 85°C
Storage temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.75W max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

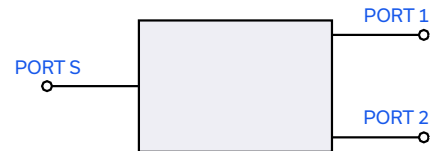




PAD CONNECTIONS

SUM PORT	2
PORT 1	7
PORT 2	9
GROUND	1,3,4,5,6,8,10,11,12, paddle

DEMO BOARD MCL P/N: TB-453-GP2Y1+ SUGGESTED PCB LAYOUT (PL-282)

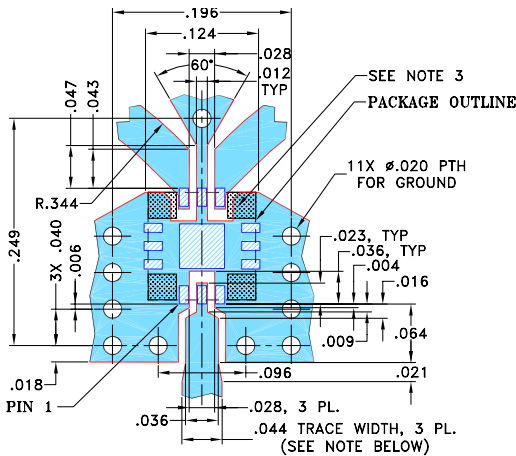


NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.


- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

PRODUCT MARKING

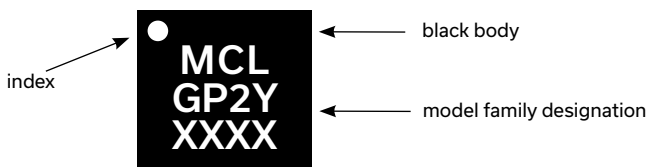


Marking may contain other features or characters for internal lot control

OUTLINE DRAWING

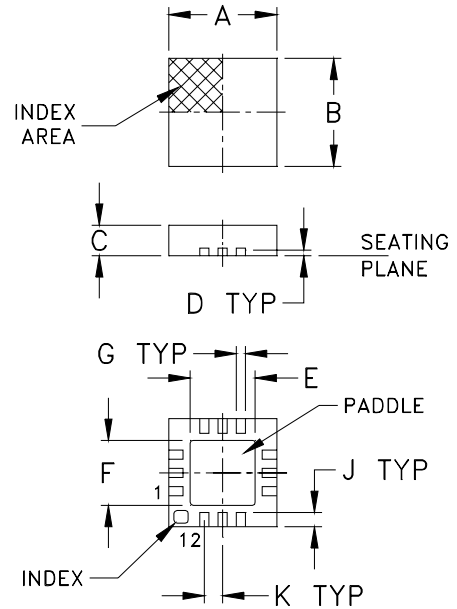

PCB Land Pattern

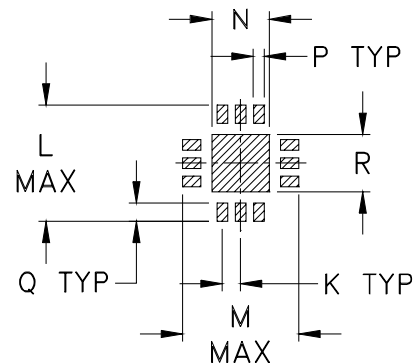

Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F	G	H	J
.118	.118	.035	.008	.057	.057	.009	---	.016
3.00	3.00	0.89	0.20	1.45	1.45	0.23	---	0.41
K	L	M	N	P	Q	R		wt
.020	.127	.127	.049	.010	.020	.049		grams
0.51	3.23	3.23	1.24	0.25	0.51	1.24		0.02




TAPE & REEL INFORMATION: F66



TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1470.00	4.45	4.44	0.01	16.20	0.33	1.73	1.30	1.31
1690.00	3.84	3.83	0.01	35.04	0.41	1.07	1.15	1.15
1870.00	3.74	3.74	0.00	24.68	0.47	1.16	1.14	1.15
2140.00	3.70	3.72	0.02	21.93	0.54	1.31	1.17	1.19
2320.00	3.67	3.69	0.02	22.75	0.57	1.30	1.16	1.17
2490.00	3.64	3.66	0.02	24.97	0.59	1.23	1.12	1.15
2670.00	3.62	3.63	0.01	29.75	0.51	1.13	1.08	1.10
2940.00	3.64	3.65	0.00	33.00	0.45	1.10	1.09	1.08
3120.00	3.70	3.70	0.00	25.78	0.45	1.21	1.17	1.15
3300.00	3.77	3.78	0.01	21.67	0.49	1.36	1.24	1.24
3490.00	3.85	3.88	0.03	18.91	0.64	1.51	1.31	1.33
3680.00	3.93	3.97	0.04	17.04	0.71	1.63	1.38	1.40
3870.00	3.98	4.05	0.07	15.77	0.85	1.71	1.44	1.51
4240.00	4.07	4.12	0.05	14.38	1.01	1.77	1.66	1.71
4430.00	4.11	4.13	0.01	14.09	0.95	1.77	1.83	1.83

1. Total Loss = Insertion Loss + 3dB splitter loss.

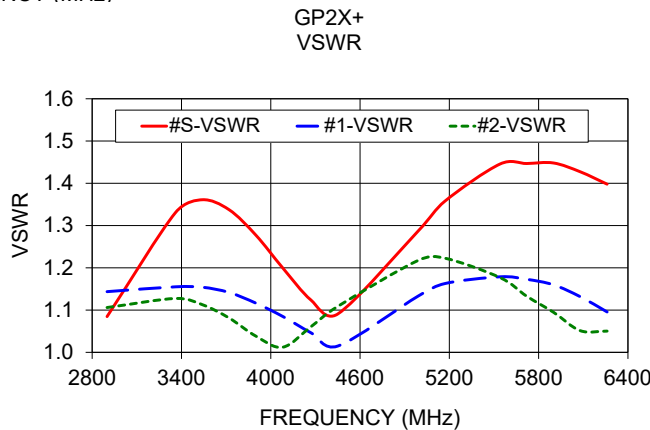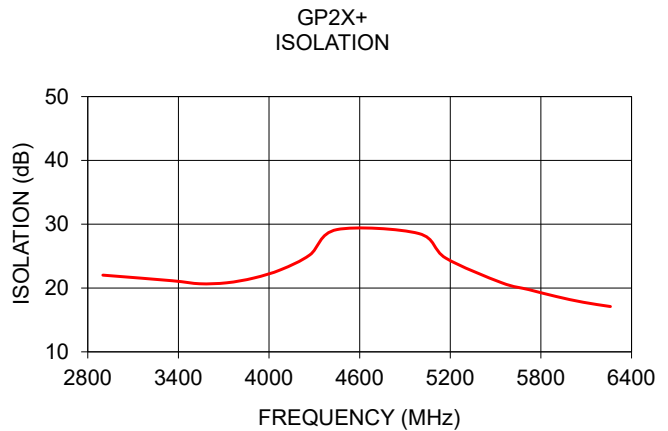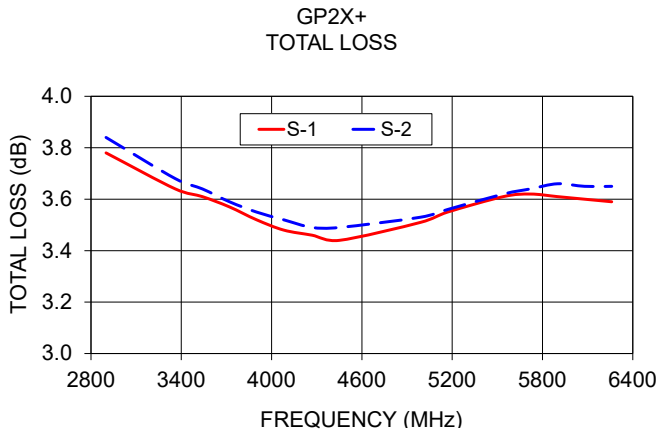

ESD RATING

Human Body Model (HBM): Class 1A (250 to < 500V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M2 (100V to < 250V) in accordance with ANSI/ESD STM 5.2 - 1999

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

