

6

5

4

3

2


1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/15	
A		ADDED 1FT PART NUMBER	5/3/19	AY/TW

CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

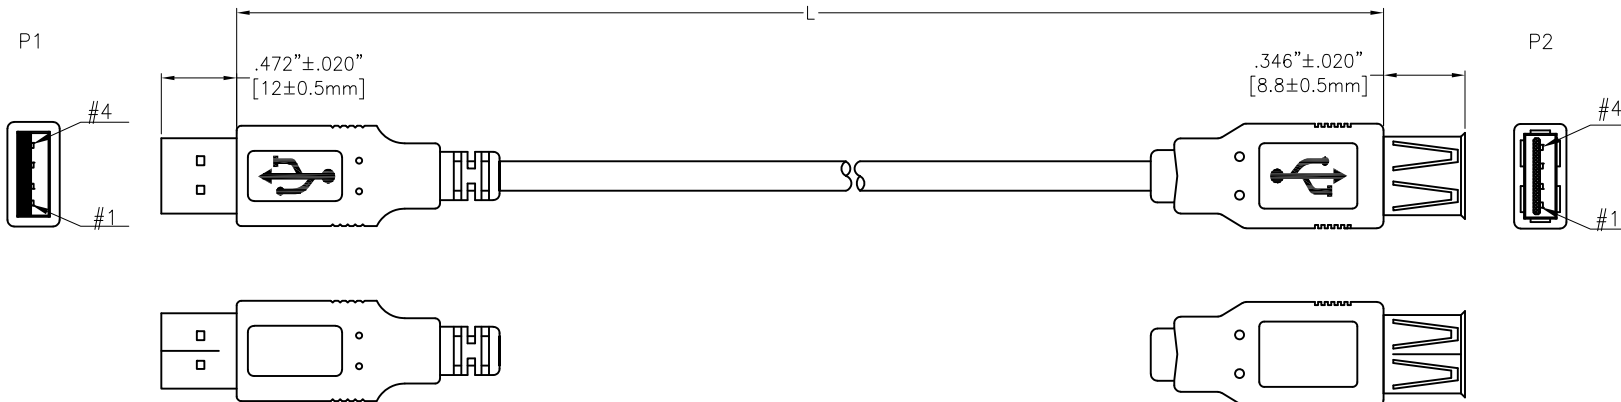

PIN ASSIGNMENT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
4	BLACK	4	
SHELL	BRAID	SHELL	

ADAM P/N	L
CA-USB-AM/AF-1FT	12.008"±.787" [305±20mm]
CA-USB-AM/AF-3FT	36.024"±1.181" [915±30mm]
CA-USB-AM/AF-6FT	72.047"±1.969" [1830±50mm]
CA-USB-AM/AF-10FT	120.079"±1.969" [3050±50mm]

**SPECIFICATIONS:**

**Connector:**

P1= USB Connector 2.0 A Type Plug, Insulator Color: White, Overmold Color: Black, 50P PVC

P2= USB Connector 2.0 A Type Socket, Insulator Color: White, Overmold Color: Black, 50P PVC

**Cable:**

UL2725, (1P+2C)+A+B, OD: .189" [4.8mm] (28/24),Jacket Color: Black .

**Electrical Test:**

All Assemblies must be 100% Tested for Shorts, Open, Continuity, and Physical Appearance.

**Environmental:**

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

**ADAM TECH**  
INTERCONNECTS

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE  
CUSTOMER ASSEMBLY, USB 2.0 PLUG TYPE A  
TO USB 2.0 SOCKET TYPE A

APPROVALS		DATE
DRAWN	HR	10/13/15
CHECKED	TW	10/13/15
APPROVED		

SIZE X	PART NO. CA-USB-AM/AF-XFT	REV. A
REF: S00087T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1