

## Printed-circuit board connector - BCH-508VF-20 BK - 5452510

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5.08 mm, Color: black, Contact surface: Tin, Mounting: Wave soldering



The figure shows a 5-pos. version of the product in gray



### Key Commercial Data

|                        |          |
|------------------------|----------|
| Packing unit           | 1 pc     |
| Minimum order quantity | 100 pc   |
| Custom tariff number   | 85366990 |
| Country of origin      | China    |

### Technical data

#### Dimensions

|                          |          |
|--------------------------|----------|
| Length                   | 8.6 mm   |
| Pitch                    | 5.08 mm  |
| Dimension a              | 96.52 mm |
| Length of the solder pin | 3.9 mm   |
| Pin dimensions           | 1 x 1 mm |
| Hole diameter            | 1.4 mm   |

#### General

|                             |        |
|-----------------------------|--------|
| Range of articles           | BCH-VF |
| Insulating material group   | I      |
| Rated surge voltage (III/3) | 4 kV   |
| Rated surge voltage (III/2) | 4 kV   |
| Rated surge voltage (II/2)  | 4 kV   |
| Rated voltage (III/3)       | 250 V  |

# Printed-circuit board connector - BCH-508VF-20 BK - 5452510

## Technical data

### General

|  |        |
|--|--------|
| Rated voltage (III/2)                  | 320 V  |
| Rated voltage (II/2)                   | 400 V  |
| Connection in acc. with standard       | EN-VDE |
| Nominal current I <sub>N</sub>         | 12 A   |
| Maximum load current                   | 12 A   |
| Insulating material                    | PA     |
| Flammability rating according to UL 94 | V0     |
| Color                                  | black  |
| Number of positions                    | 20     |

### Standards and Regulations

|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
|  | CUL    |
| Flammability rating according to UL 94 | V0     |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27261101 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11     | 39121432 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121432 |

# Printed-circuit board connector - BCH-508VF-20 BK - 5452510

## Approvals

### Approvals

---

#### Approvals

UL Recognized / VDE report with production monitoring / cUL Recognized / IEC CB Scheme / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

## Approval details

| UL Recognized      |       |       |
|--------------------|-------|-------|
|                    | B     | D     |
| Nominal current IN | 15 A  | 15 A  |
| Nominal voltage UN | 300 V | 150 V |

VDE report with production monitoring

| cUL Recognized     |       |       |
|--------------------|-------|-------|
|                    | B     | D     |
| Nominal current IN | 15 A  | 15 A  |
| Nominal voltage UN | 300 V | 150 V |


IECEE CB Scheme

cULus Recognized 

## Drawings

# Printed-circuit board connector - BCH-508VF-20 BK - 5452510

Drilling diagram

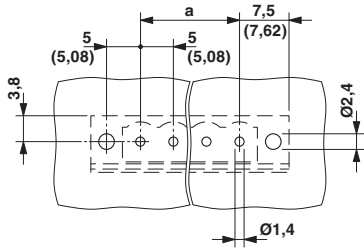

Dimensional drawing

