

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 24 AWG 0.22 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 11$
 Resistance at 20 °C: 94.2 Ω /km max

Insulator

Material: PVC
 Color: white, black
 Diameter: $\varnothing 1.2 \pm 0.10$ mm
 Nominal thickness: 0.27 mm
 Resistance at 20 °C: 10 M Ω /km min


Outer jacket

Material: PVC
 Color: black
 Diameter: $\varnothing 4 \pm 0.20$ mm
 Nominal thickness: 0.80 mm

Wire marking: E339579 UL AWM STYLE 2464 24 AWG 80°C 300V VW-1 - - - cUL AWM I/II A 80°C 300V FT1 LF TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking

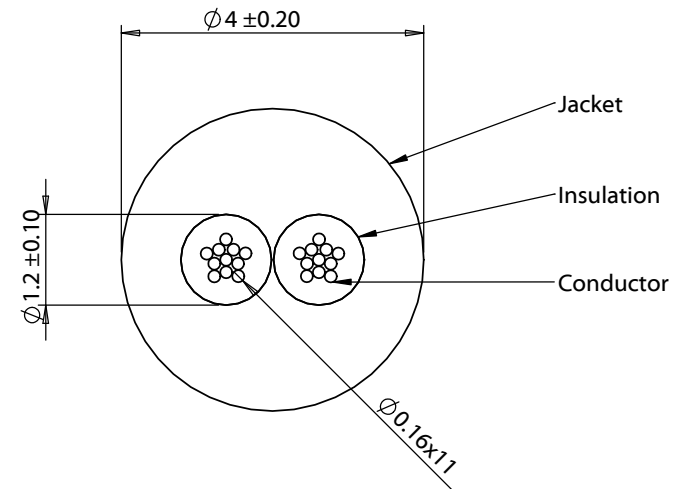

Revision:	Date:	Description:	Prepared: JP <small>Digitally signed by JP Date: 2018.09.05 16:45:58 -07'00'</small>	Notes: RoHS and REACH compliant	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	06/24/2014	Initial release	Verified: PS <small>Digitally signed by PS Date: 2018.09.05 17:31:26 -07'00'</small>	Function test: no open, no short circuit, no intermittent		
A1	09/05/2018	Increased operating temperature range	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 2C TS, 24 AWG, UL2464, 300V, 80C, 4.0 mm, VW-1, PVC	Size: A Part number: 30-00359	
				Scale: 10:1		Sheet 1 of 1

5

4

3

2

1