

Part Number: TOP100

2.54mm[0.100inch] test pitch



Probe Specifications

Minimum Center:	2.54mm[0.100inch]
Full Stroke:	6.35mm[0.25inch]
Recommended Stroke:	4.25mm[0.167inch]
Spring Force:	200g[7.054oz]
Impedance:	20milliohms
Current:	3Amp
Temperature:	-55°C to 120°C [-67°F to 248°F]
Spring Life:	1000K cycles
Diameter Tolerance:	±0.01mm[±0.39mil]
Length Tolerance:	±0.10mm[±3.93mil]
Straightness Tolerance:	0.05mm[±1.97mil]

Materials Specifications

Plunger:	SK-4, BeCu, Au plating treatment
Spring:	Music wire, Au plating treatment
Barrel:	Phosphor Copper, Au plating treatment

Spring Force

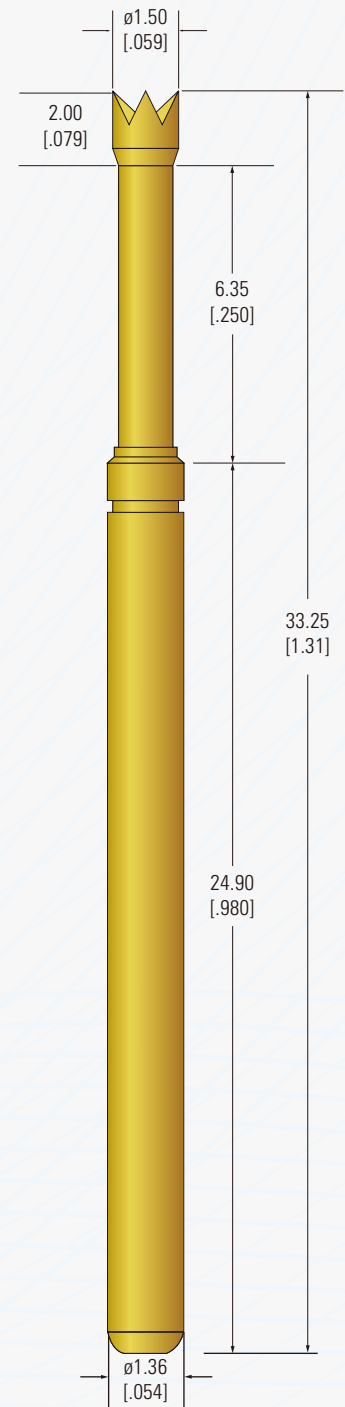
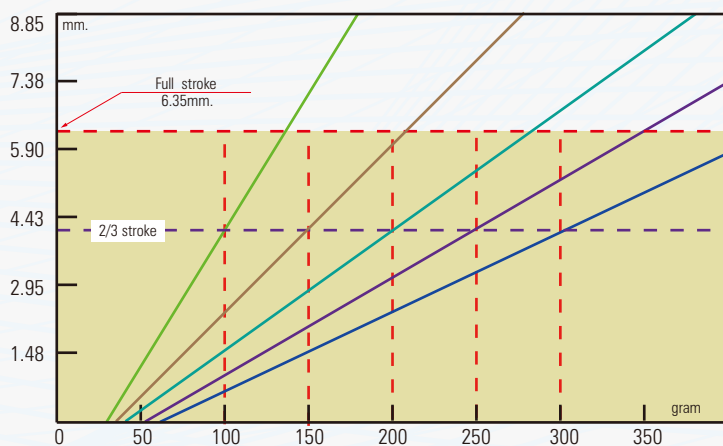


Probe mm.[inch]


ICT FCT Probes
PCB Probes
High Current Probes
Battery Probes
High Frequency
Switch Probes
Automotive Probes
Semiconductor Probes

Receptacle mm.[inch]

Fixture Drilling Measurement

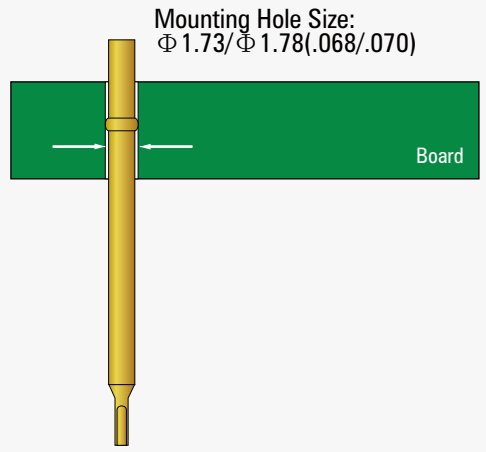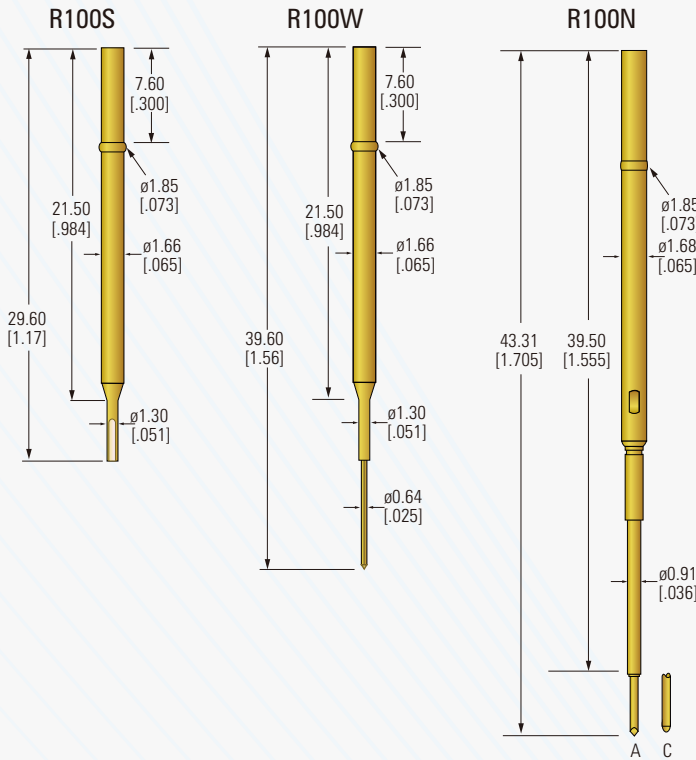

Tip Style

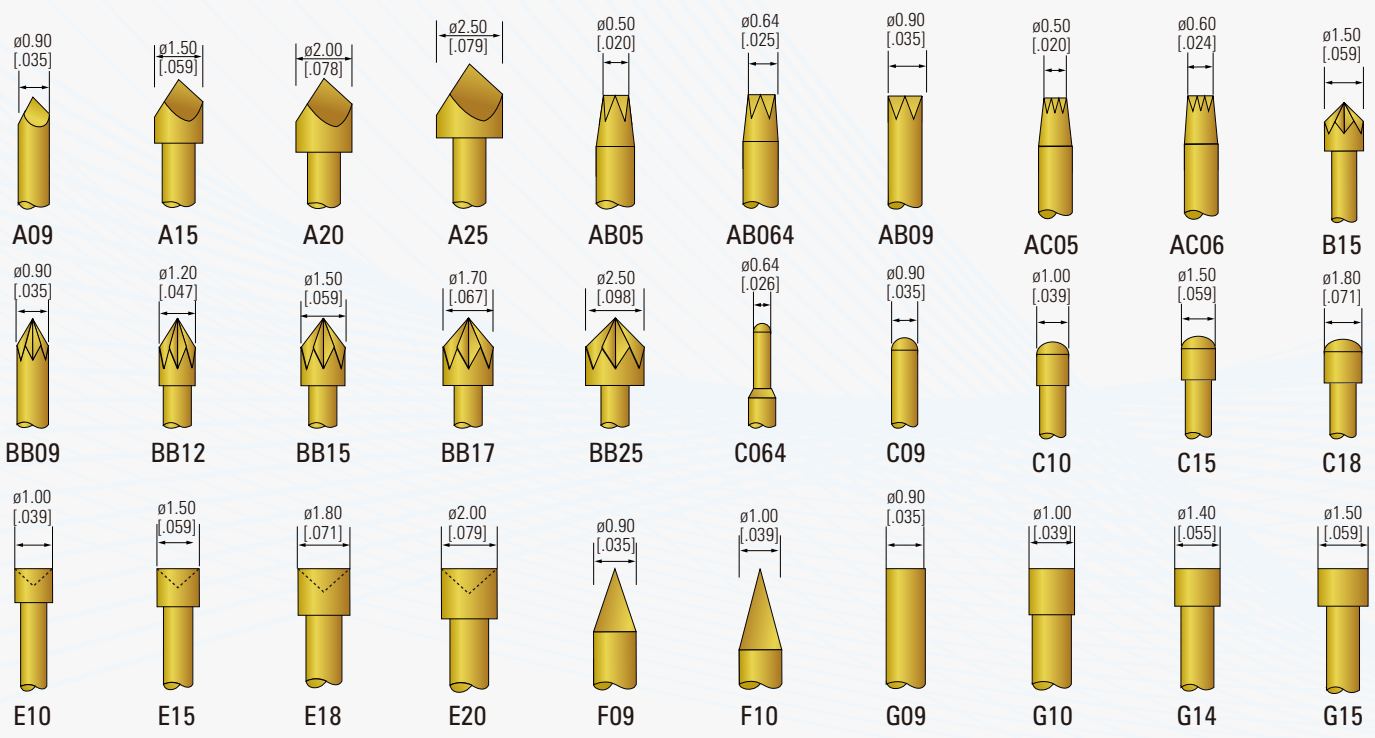

ICT FCT Probes



How to order

TOP	100	H	15	200G
Series Name TOP =Normal ICT Probe CTOP =High Current Probe BP =Battery Probe FTOP =Frequency Probe ATOP =Automotive Probe SWTOP =Switch Probe	Test Pitch Number 100 =100mil test pitch	Head Style Code H =4 points crown C =Round more...	Head Diameter 15 =1.5mm=0.059inch	Spring Force 200G =200grams=2Newton 250G =250grams=2.5Newton more...