


# CP788X-2N2605

## PNP - General Purpose Transistor Die

The CP788X-2N2605 is a silicon PNP transistor designed for general purpose applications.



### MECHANICAL SPECIFICATIONS:

Die Size	13.7 x 13.7 MILS
Die Thickness	5.9 MILS
Base Bonding Pad Size	4.0 x 4.0 MILS
Emitter Bonding Pad Size	5.5 x 5.5 MILS
Top Side Metalization	Al-Si – 17,000Å
Back Side Metalization	Au – 9,000Å
Scribe Alley Width	1.8 MILS
Wafer Diameter	5 INCHES
Gross Die Per Wafer	91,469

### MAXIMUM RATINGS: (T<sub>A</sub>=25°C)

	SYMBOL		UNITS
Collector-Base Voltage	V <sub>CBO</sub>	60	V
Collector-Emitter Voltage	V <sub>CEO</sub>	45	V
Emitter-Base Voltage	V <sub>EBO</sub>	6.0	V
Continuous Collector Current	I <sub>C</sub>	30	mA
Operating and Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-65 to +150	°C






### ELECTRICAL CHARACTERISTICS: (T<sub>A</sub>=25°C)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I <sub>CBO</sub>	V <sub>CB</sub> =45V		10	nA
I <sub>CES</sub>	V <sub>CE</sub> =45V		10	nA
I <sub>EBO</sub>	V <sub>EB</sub> =5.0V		2.0	nA
BV <sub>CBO</sub>	I <sub>C</sub> =10μA	60		V
BV <sub>CEO</sub>	I <sub>C</sub> =10mA	45		V
BV <sub>EBO</sub>	I <sub>E</sub> =10μA	6.0		V
V <sub>CE(SAT)</sub>	I <sub>C</sub> =10mA, I <sub>B</sub> =0.5mA		0.5	V
V <sub>BE(SAT)</sub>	I <sub>C</sub> =10mA, I <sub>B</sub> =0.5mA	0.7	0.9	V
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10μA	100	300	
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =500μA	150		
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10mA		600	
f <sub>T</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =0.5mA, f=30MHz	30		MHz
C <sub>ob</sub>	V <sub>CB</sub> =5.0V, I <sub>E</sub> =0, f=1.0MHz		6.0	pF
h <sub>ie</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =1.0mA, f=100MHz		200	Ω
h <sub>ib</sub>	V <sub>CB</sub> =5.0V, I <sub>E</sub> =1.0mA, f=1.0kHz	25	35	Ω
h <sub>rb</sub>	V <sub>CB</sub> =5.0V, I <sub>E</sub> =1.0mA, f=1.0kHz		10	x10 <sup>-4</sup>
h <sub>ob</sub>	V <sub>CB</sub> =5.0V, I <sub>E</sub> =1.0mA, f=1.0kHz		1.0	μS
h <sub>fe</sub>	V <sub>CB</sub> =5.0V, I <sub>E</sub> =1.0mA, f=1.0kHz	150	600	
NF	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10μA, R <sub>G</sub> =10kΩ, f=10Hz to 15.7kHz		3.0	dB

R0 (23-August 2016)

# CP788X-2N2605

## Typical Electrical Characteristics

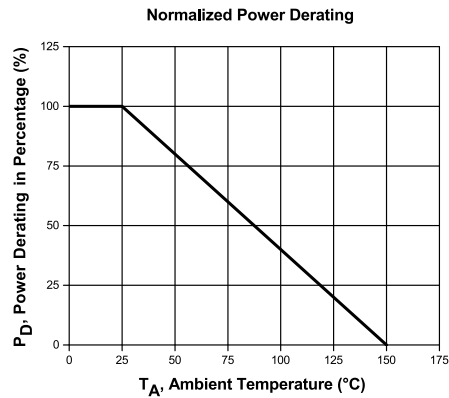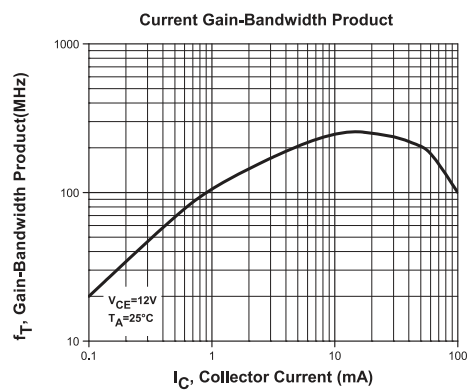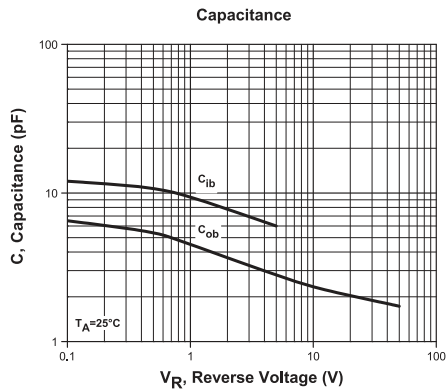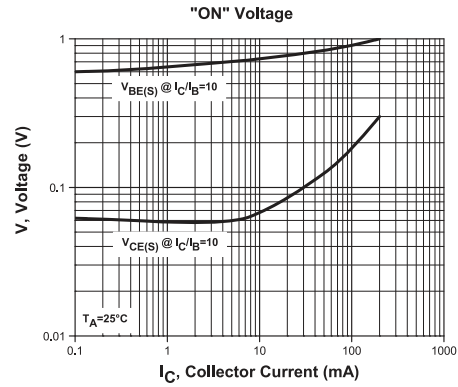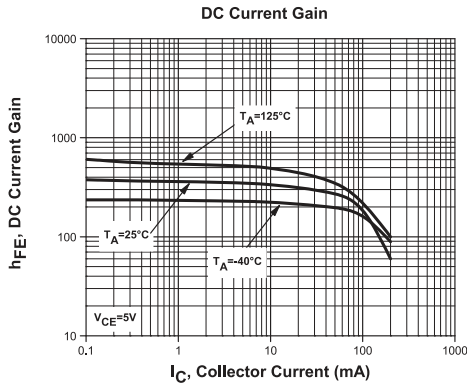

## BARE DIE PACKING OPTIONS

---



### BARE DIE IN TRAY (WAFFLE) PACK

**CT:** Singulated die in tray (waffle) pack.  
(example: CP211-PART NUMBER-CT)

**CM:** Singulated die in tray (waffle) pack 100% visually inspected as per MIL-STD-750, (method 2072 transistors, method 2073 diodes).  
(example: CP211-PART NUMBER-CM)

---



### UNSAWN WAFER

**WN:** Full wafer, unsawn, 100% tested with reject die inked.  
(example: CP211-PART NUMBER-WN)


---



### SAWN WAFER ON PLASTIC RING

**WR:** Full wafer, sawn and mounted on plastic ring,  
100% tested with reject die inked.  
(example: CP211-PART NUMBER-WR)

Please note: Sawn Wafer on Metal Frame (WS) is possible as a special order. Please contact your Central Sales Representative at 631-435-1110.



Visit the Central website for a complete listing of specifications:  
[www.centrasemi.com/bdspecs](http://www.centrasemi.com/bdspecs)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)