

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: VW-1

Conductor

Conductor count: 1
 Gauge: 26 AWG mm²
 Material: tinned copper strands
 Strand size: \varnothing mm x 26
 Resistance at 20 °C: 150 Ω /km max



Insulator

Material: Polyphenylene Ether, Modified (mPPE)
 Color: blue
 Diameter: \varnothing 1 \pm 0.10 mm
 Nominal thickness: 0.25 mm
 Resistance at 20 °C: 100 M Ω /km min

Wire marking: E339579 UL AWM STYLE 11028 26 AWG 105°C
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

Bend radius

Minimum: 4 times diameter (4.0 mm)

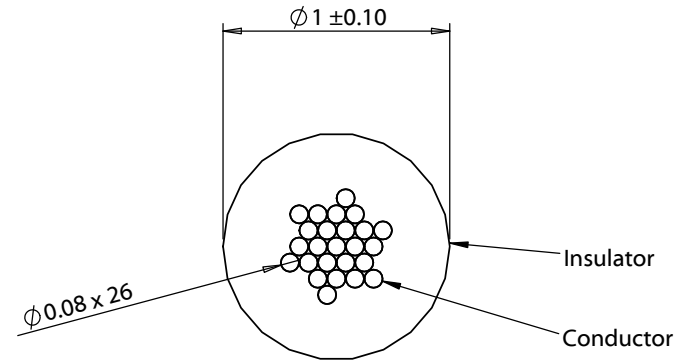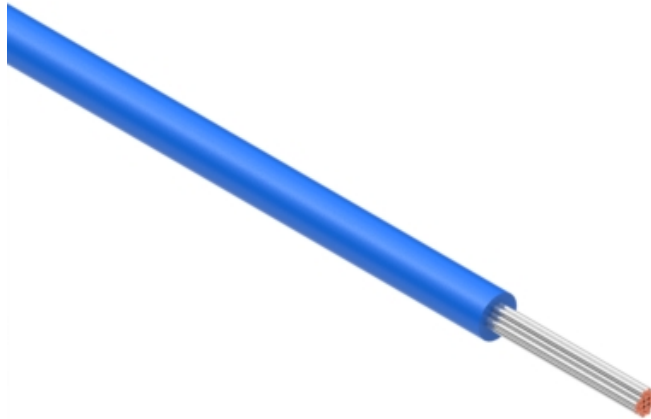

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	3/2/2021	Initial release	AG <small>Digitally signed by AG Date: 2021.03.02 14:21:15 -08'00'</small>	RoHS compliant	
			Verified:	Phthalate and halogen free	Size:
			AW <small>Digitally signed by AW Date: 2021.03.05 11:56:04 -08'00'</small>	Description:	A
			Dimensions are in millimeters.	Wire, hook-up, TS, 26 AWG, UL 11028, 600V, 105C, 1 mm, mPPE, blue	Part number:
			Tolerances:		30-01776
			X: \pm 0.5 mm		Scale: 30:1
			X.X: \pm 0.3 mm		
			X.XX: \pm 0.05 mm		Sheet 1 of 1

5

4

3

2

1