

**QT-Brightek Chip LED Series**

**SMD 1208 Tri-Color LED**

**Part No.: QBLP653-RAGUV**

---

**Table of Contents:**

Introduction .....	3
Electrical / Optical Characteristic (Ta=25°C) .....	4
Absolute Maximum Rating .....	4
Characteristic Curves.....	5
Solder Profile & Footprint.....	7
Packing .....	8
Labeling .....	9
Ordering Information .....	9
Revision History .....	10
Disclaimer .....	10

## Introduction

**Feature:**

- Water clear dome lens
- Package in tap and reel
- Bright 1208 LED package
- AllnGaP technology for R(red) / AG (yellow green)
- InGaN technology for UV
- 60° Viewing Angle

**Description:**

These 1208 tri-color LEDs have a height profile of 2.5mm. With narrow viewing angle, LED produces high bright light output.

**Application:**



- Status indication
- Back lighting application

**Certification & Compliance:**

- TS16949
- ISO9001
- RoHS Compliant



**Dimension:**

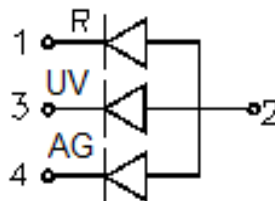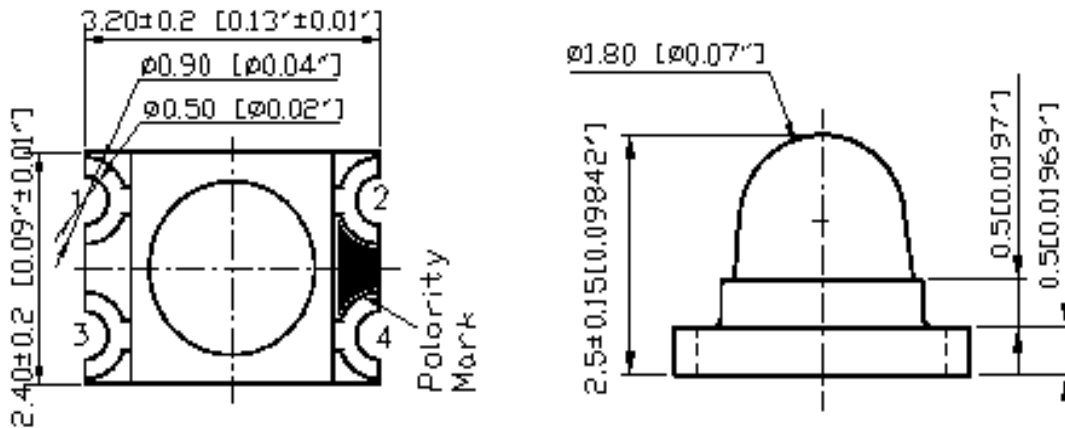

Units: mm / tolerance = +/-0.1mm

**Electrical / Optical Characteristic (Ta=25°C)**

Product	Color	I <sub>F</sub> (mA)	V <sub>F</sub> (V)		λ <sub>D</sub> (nm)			I <sub>V</sub> (mcd)	
			Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.
QBLP653-RAGUV	Red	20	2.0	2.5	625	630	635	50	-
	Yellow Green	20	2.0	2.5	565	570	575	32	-
	UV	20	3.1	3.7	-	428	-	1.0	-
					λ <sub>p</sub> (nm)				
				405	410	415			

**Absolute Maximum Rating**







Material	P <sub>d</sub> (mW)	I <sub>F</sub> (mA)	I <sub>FP</sub> (mA)*	V <sub>R</sub> (V)	T <sub>OP</sub> (°C)	T <sub>ST</sub> (°C)**	T <sub>SOL</sub> (°C)**
AllnGaP	75	30	125	5	-40 ~ +80	-40 ~ +85	260
InGaN	108	30	125	5	-40 ~ +80	-40 ~ +85	260

\*Duty 1/8 @ 1kHz




\*\*IR Reflow for no more than 10 sec @ 260 °C

**Characteristic Curves**

AllnGaP

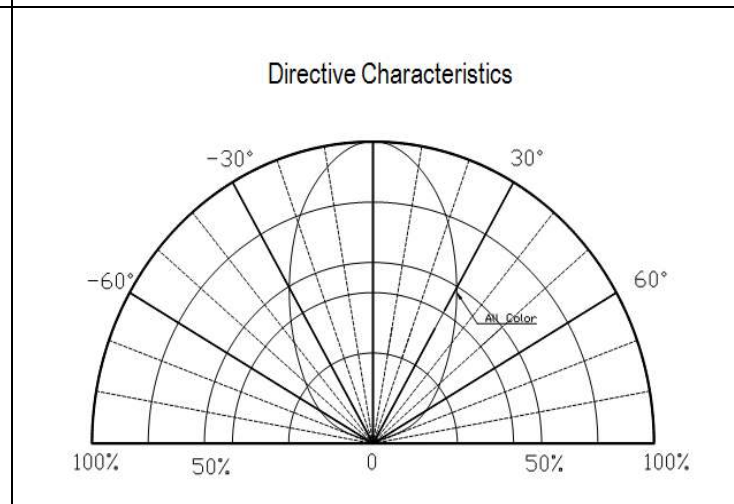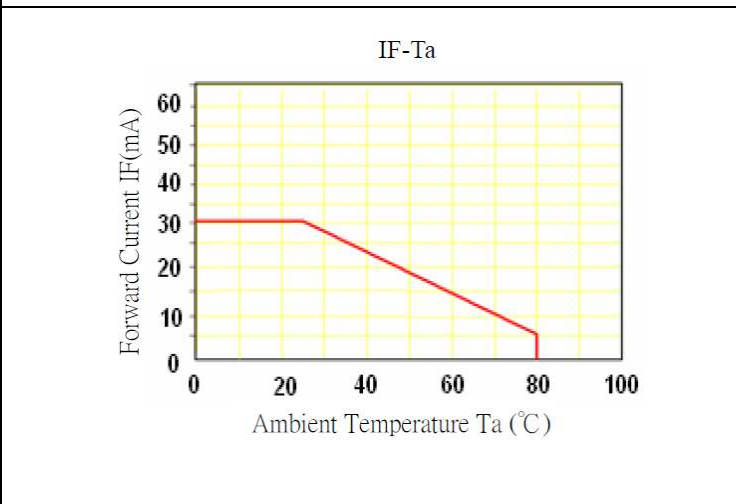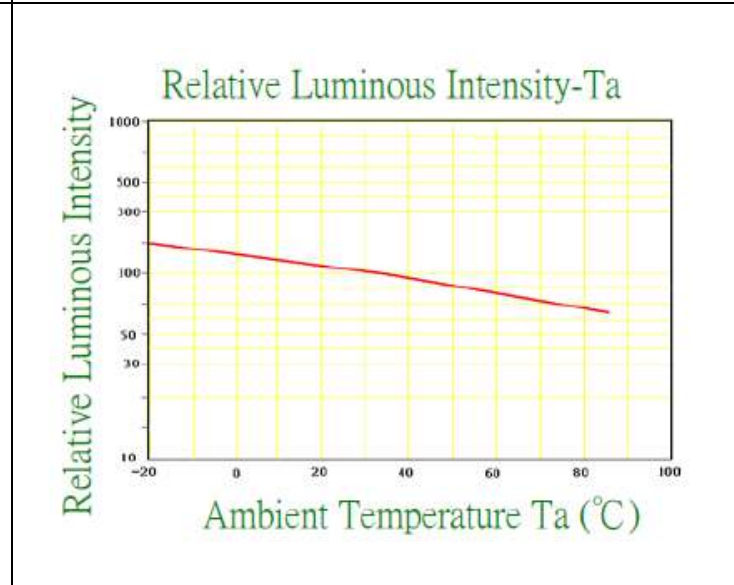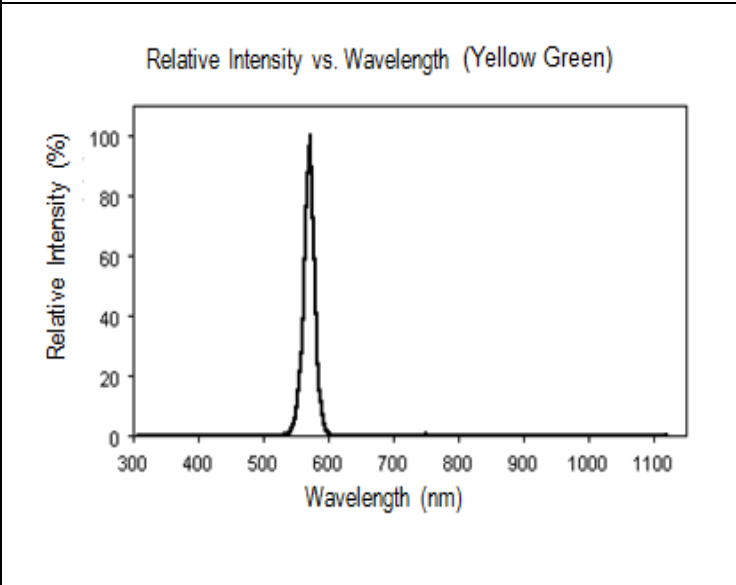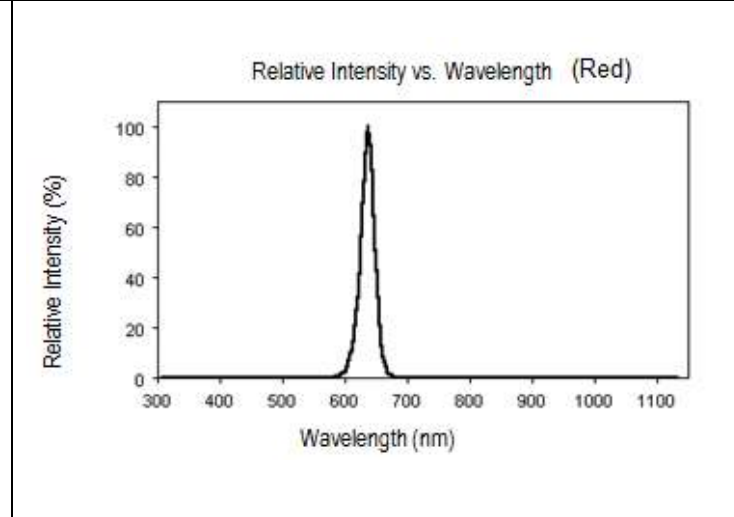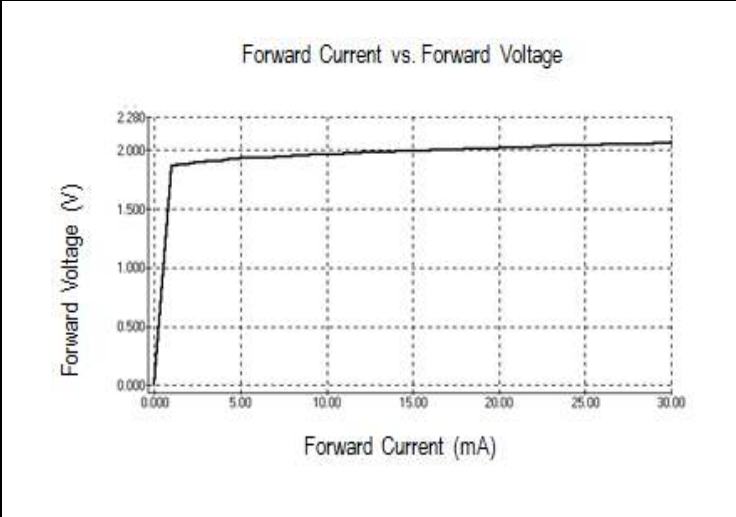


InGaN

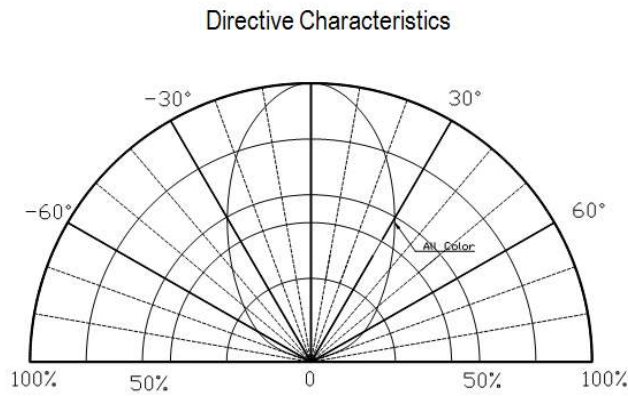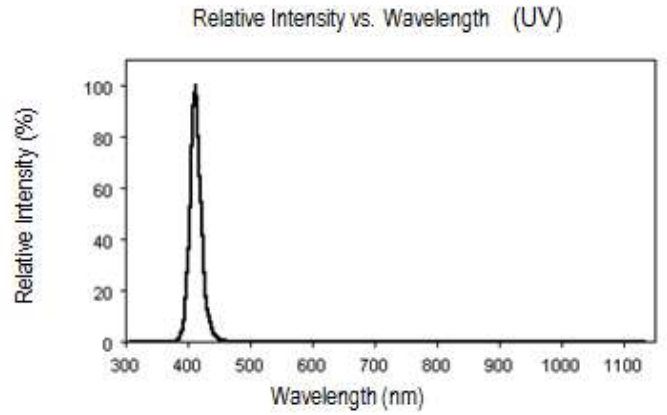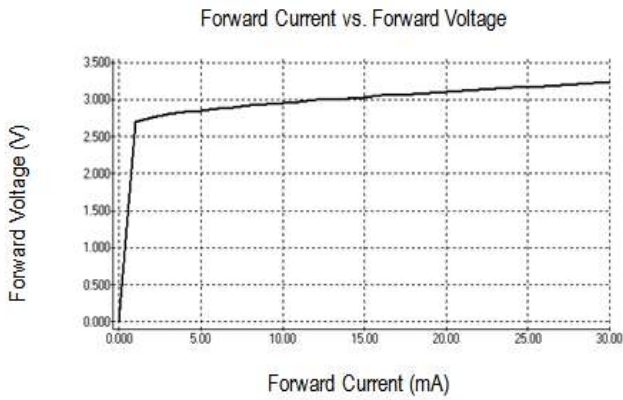


## Solder Profile & Footprint

- Recommended tin solder specifications: melting temperature in the range of 178~192 °C
- The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

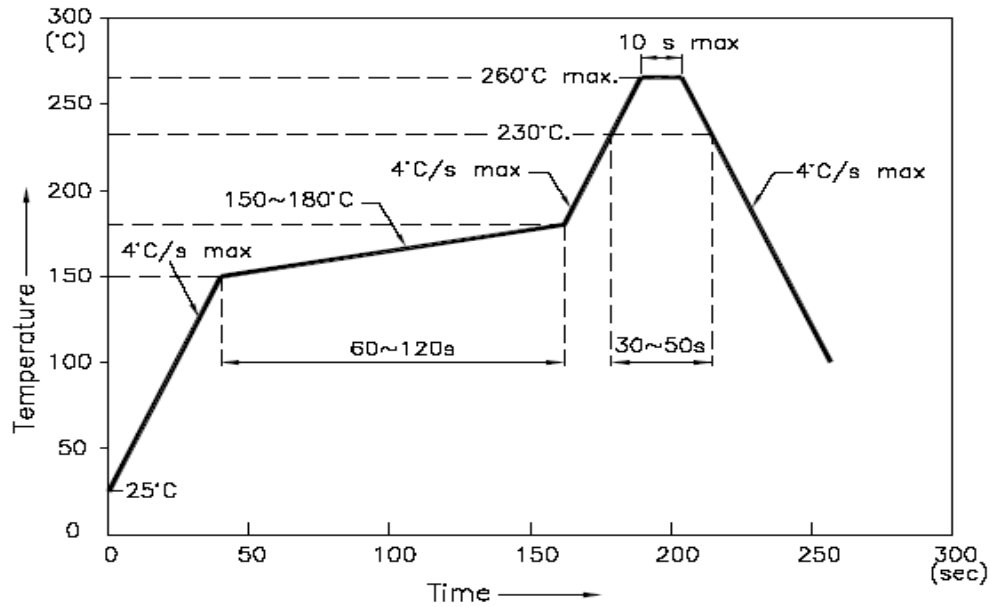

### Recommend Pad Layout

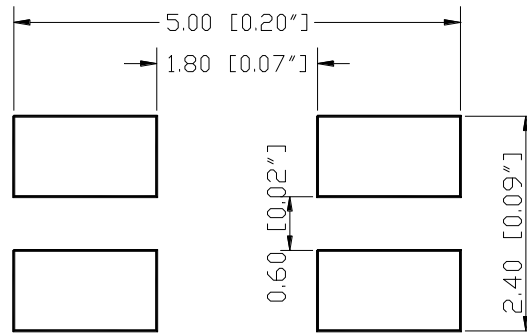


Units: mm

tolerance: +/- 0.1mm


## Packing

### Reel Dimension:

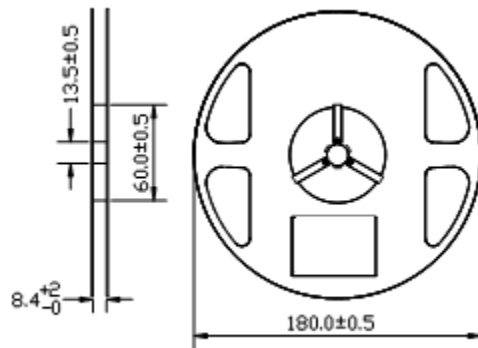


Unit: mm

### Tape Dimension:

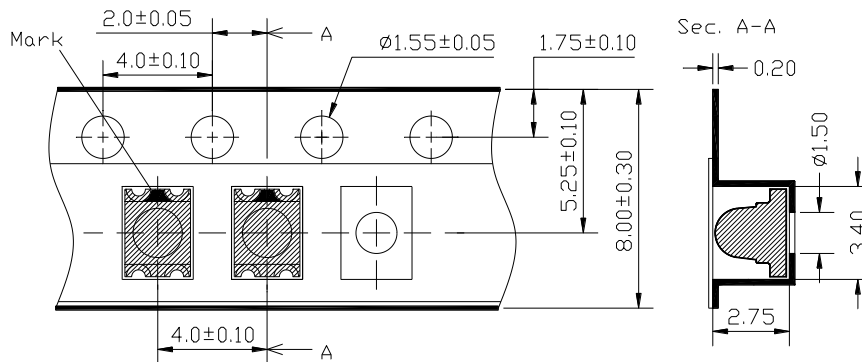

Unit: mm

### Packaging Specification:

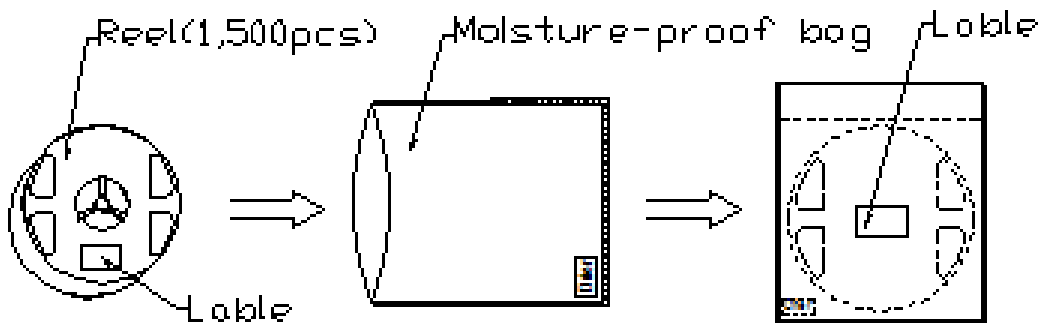



**Labeling**



Part No: \_\_\_\_\_

Customer P/N: \_\_\_\_\_

Item: \_\_\_\_\_

Q'ty: \_\_\_\_\_

Vf: \_\_\_\_\_

Iv: \_\_\_\_\_

WI: \_\_\_\_\_

Date: \_\_\_\_\_

**Made in China**

**Ordering Information**

Part #	Orderable Part #	Spec Range	Quantity per reel
QBLP653-RAGUV	QBLP653-RAGUV	Red: Iv=50mcd min., λ <sub>D</sub> =625nm to 635nm @ I <sub>F</sub> =20mA	1500 units
		Yellow Green: Iv=32mcd min., λ <sub>D</sub> =565nm to 575nm @ I <sub>F</sub> =20mA	
		UV: Iv=1.0mcd min., λ <sub>D</sub> =428nm typ. / λ <sub>P</sub> =405 to 415nm @ I <sub>F</sub> =20mA	

## Revision History

Description:	Revision #	Revision Date
New Release of QBLP653-RAGUV	V1.0	01/23/2013
Update Labeling	V1.1	04/14/2016
Correct typos, add Peak wavelength for UV	V1.2	08/31/2016
Correct VF spec for UV	V1.3	10/18/2016

## Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

## Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.