


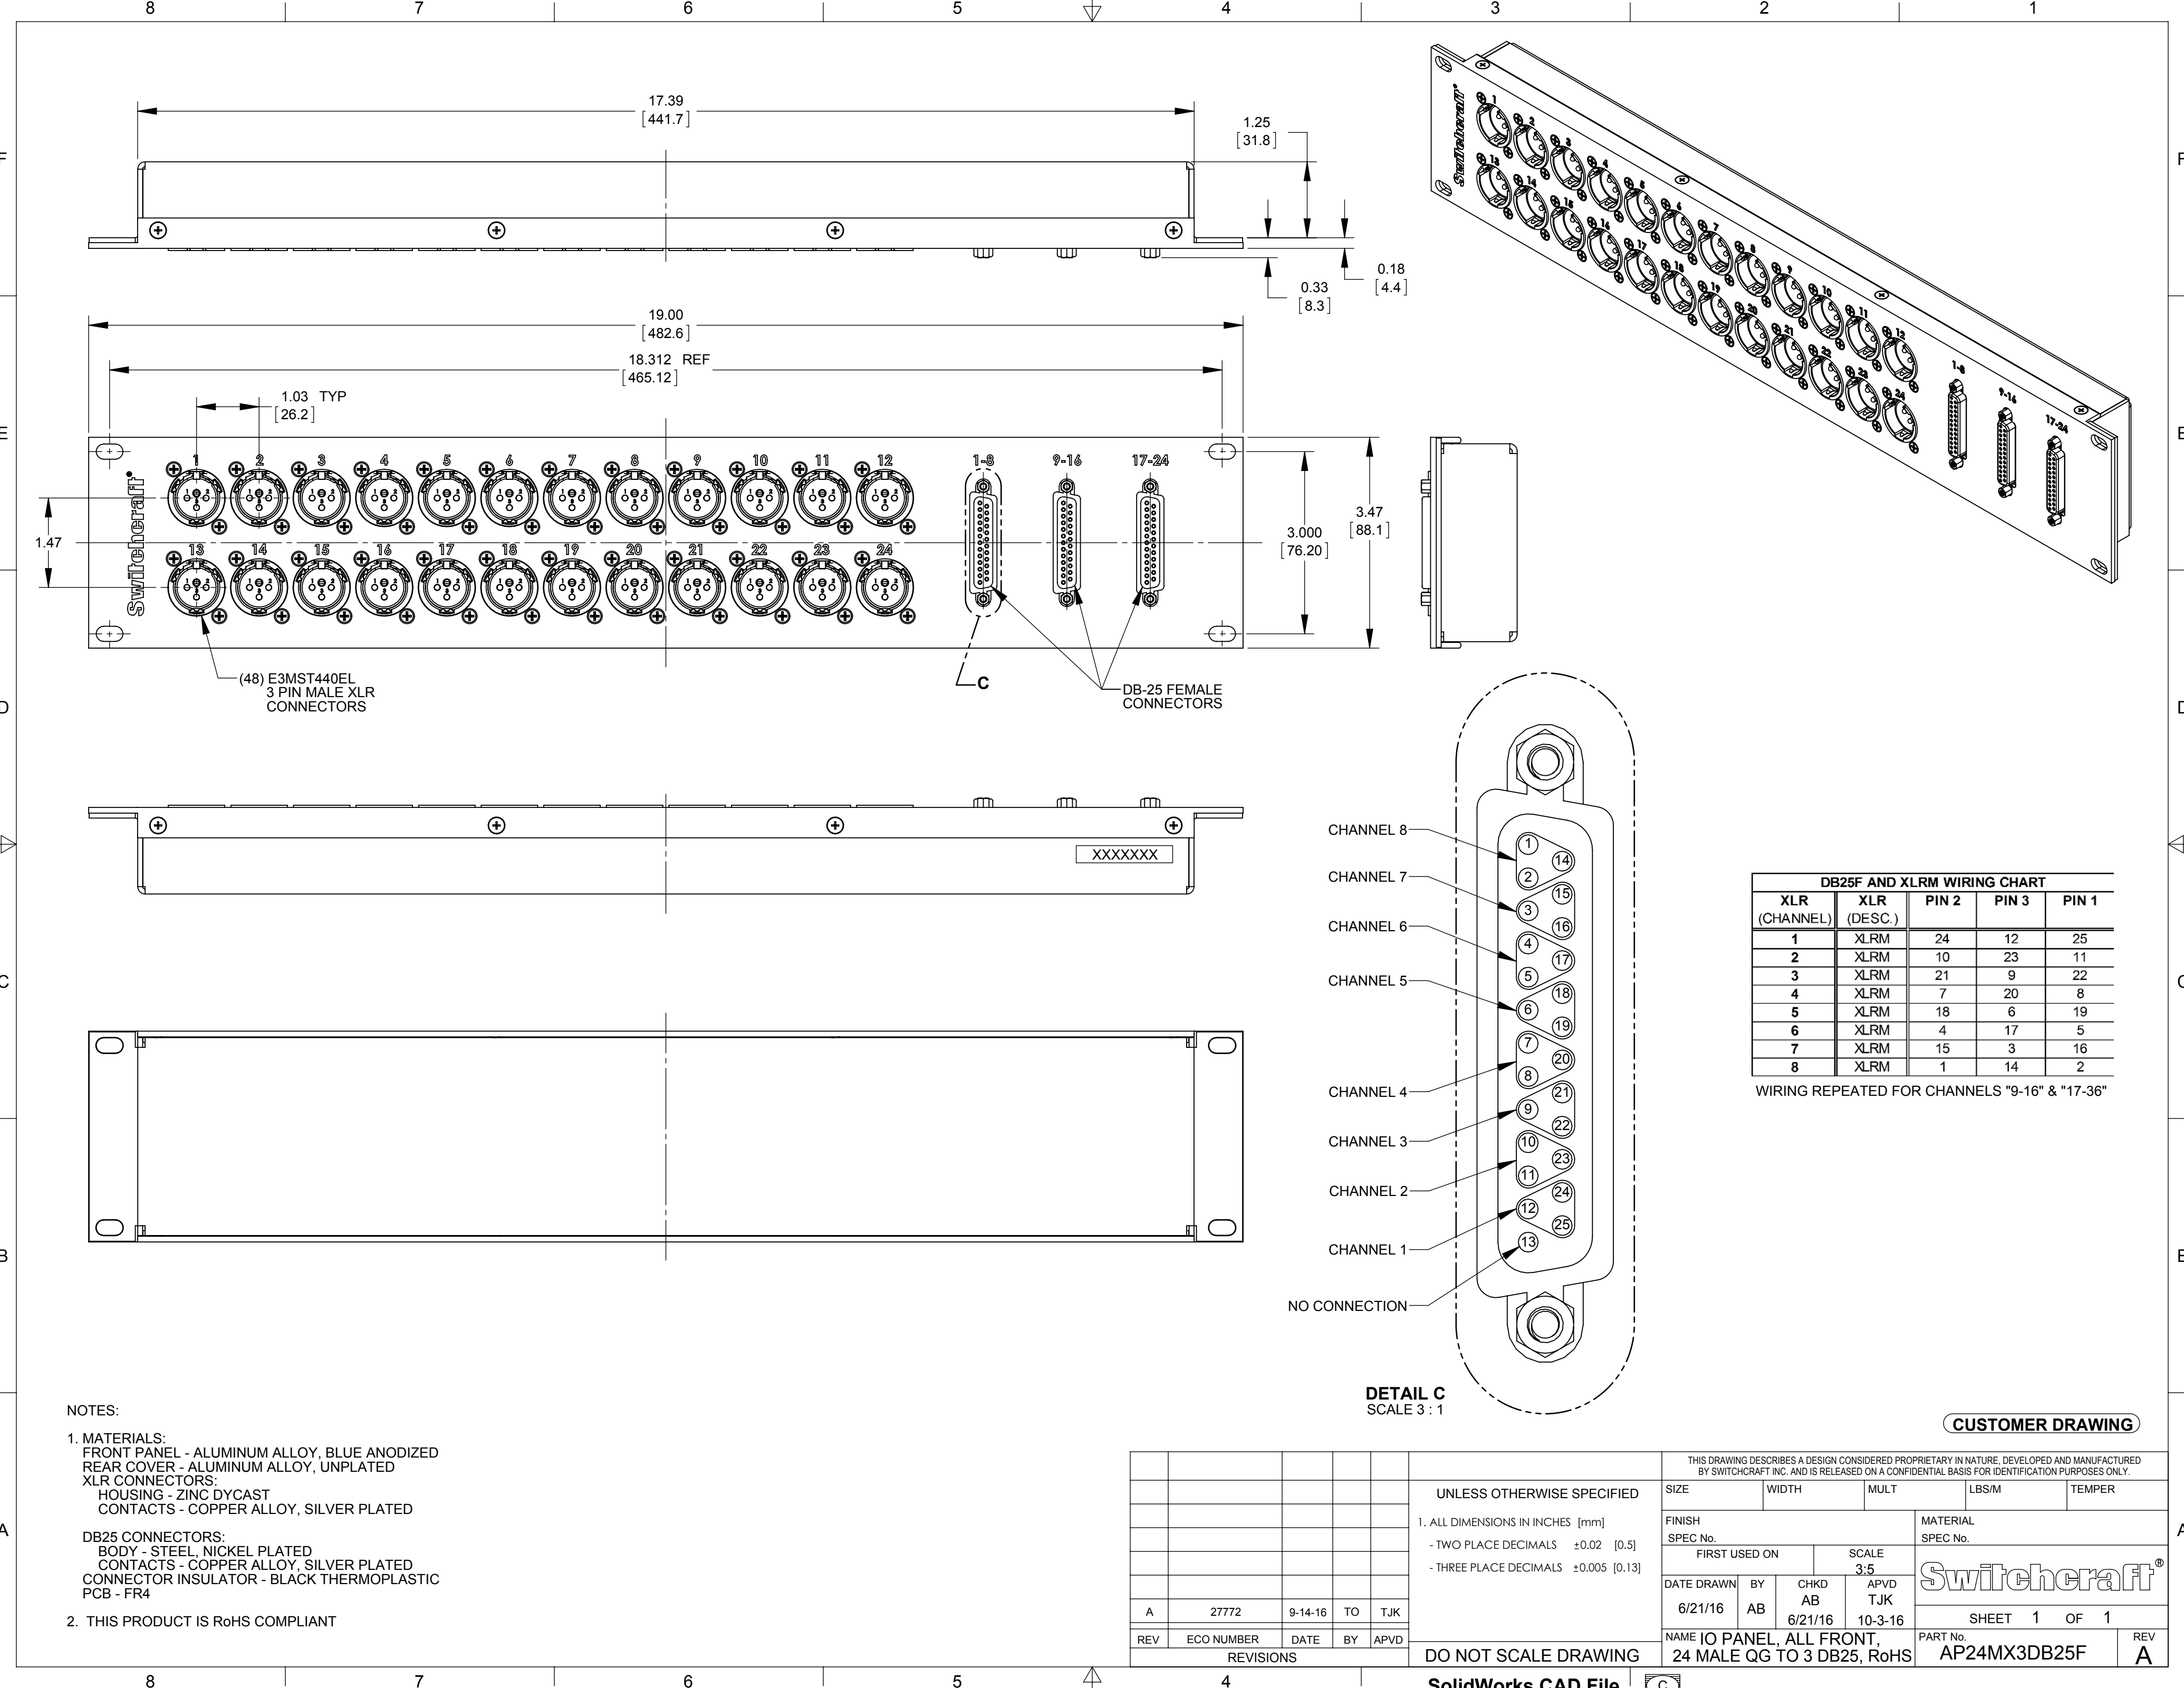

NOTES:

1. MATERIALS:
FRONT PANEL - ALUMINUM ALLOY, BLUE ANODIZED
REAR COVER - ALUMINUM ALLOY, UNPLATED
XLR CONNECTORS:
HOUSING - ZINC DYCAST
CONTACTS - COPPER ALLOY, SILVER PLATED


DB25 CONNECTORS:
BODY - STEEL, NICKEL PLATED
CONTACTS - COPPER ALLOY, SILVER PLATED
CONNECTOR INSULATOR - BLACK THERMOPLASTIC
PCB - FR4

2. THIS PRODUCT IS RoHS COMPLIANT

						THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.																
						UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	SIZE		WIDTH		MULT		LBS/M		TEMPER							
							FINISH SPEC No.						MATERIAL SPEC No.									
							FIRST USED ON				SCALE 3:5				Switchcraft®							
							DATE DRAWN	BY	CHKD	APVD												
							6/21/16	AB	AB	TJK	6/21/16 10-3-16											
							NAME IO PANEL, ALL FRONT, 24 MALE QG TO 3 DB25, RoHS										PART No. AP24MX3DB25F				REV A	
							DO NOT SCALE DRAWING															
A	27772	9-14-16	TO	TJK																		
REV	ECO NUMBER	DATE	BY	APVD																		
REVISIONS																						

DB25F AND XLRM WIRING CHART				
XLR (CHANNEL)	XLR (DESC.)	PIN 2	PIN 3	PIN 1
1	XLRM	24	12	25
2	XLRM	10	23	11
3	XLRM	21	9	22
4	XLRM	7	20	8
5	XLRM	18	6	19
6	XLRM	4	17	5
7	XLRM	15	3	16
8	XLRM	1	14	2

WIRING REPEATED FOR CHANNELS "9-16" & "17-36"

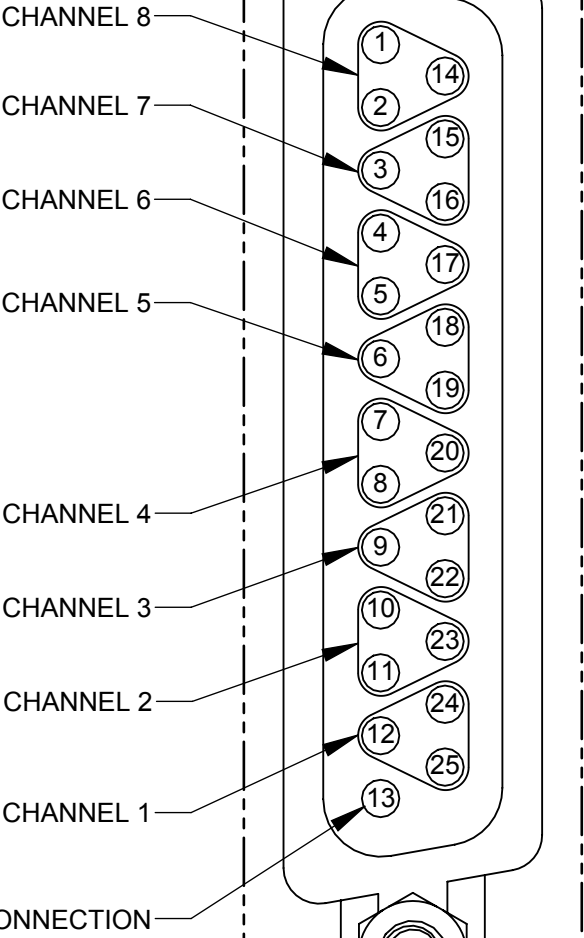

DETAIL C
SCALE 3 : 1

CUSTOMER DRAWING