

NOTES

1. ターミナル及びネイル平坦度は 0.1 MAX.
TERMINAL AND NAIL COPLANARITY TO BE 0.1 MAX.


2.

カード装着状態 CARD INSERTION STATE	プロテクトスイッチ PROTECT SWITCH		ディテクトスイッチ DETECT SWITCH
	書き込み禁止状態 READ-ONLY	書き込み可能状態 WRITE ENABLE	
カード未装着 CARD UNINSERTION	クローズ CLOSE	クローズ CLOSE	クローズ CLOSE
カード装着 CARD INSERTION	クローズ CLOSE	オープン OPEN	オープン OPEN

3. 本製品は 54768-0902 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 54768-0902.

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	RELEASED EC NO. J2004-4339 DRWN: H. KAWABATA 04/05/19 CHK: K. TOJO 04/05/19 APPR: M. SASAO 04/05/19	MATERIAL 材料 表記参照 SEE CHART	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差 10 UNDER 未満 ±0.2 10 OVER 30 UNDER 未満 ±0.25 30 OVER 以上 ±0.3 ANGLE 角度 ±3°	MODEL NO. 54768-***72 SCALE 2 : 1 DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH THIRD ANGLE PROJECTION <input checked="" type="checkbox"/> THIRD ANGLE <input type="checkbox"/> FIRST ANGLE	DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH ONLY	SHT REV 9 1 OF 2
						FINISH 仕上げ 表記参照 SEE CHART				TITLE: SD MEMORY CARD CONN. EJECT MECHANISM FOR PUSH/PUSH ASS'Y (REVERSE TYPE) -LEAD FREE-
						WIRE RANGE 適用電線被覆範囲 #				MOLEX INCORPORATED APPROVED BY & DATE H. Sasao 04/05/19 CAD FILENAME SD-54768-012.S01
						INS. RANGE 被覆外径 #				MATERIAL NO. SEE CHART DRAWING NO. SD-54768-012 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

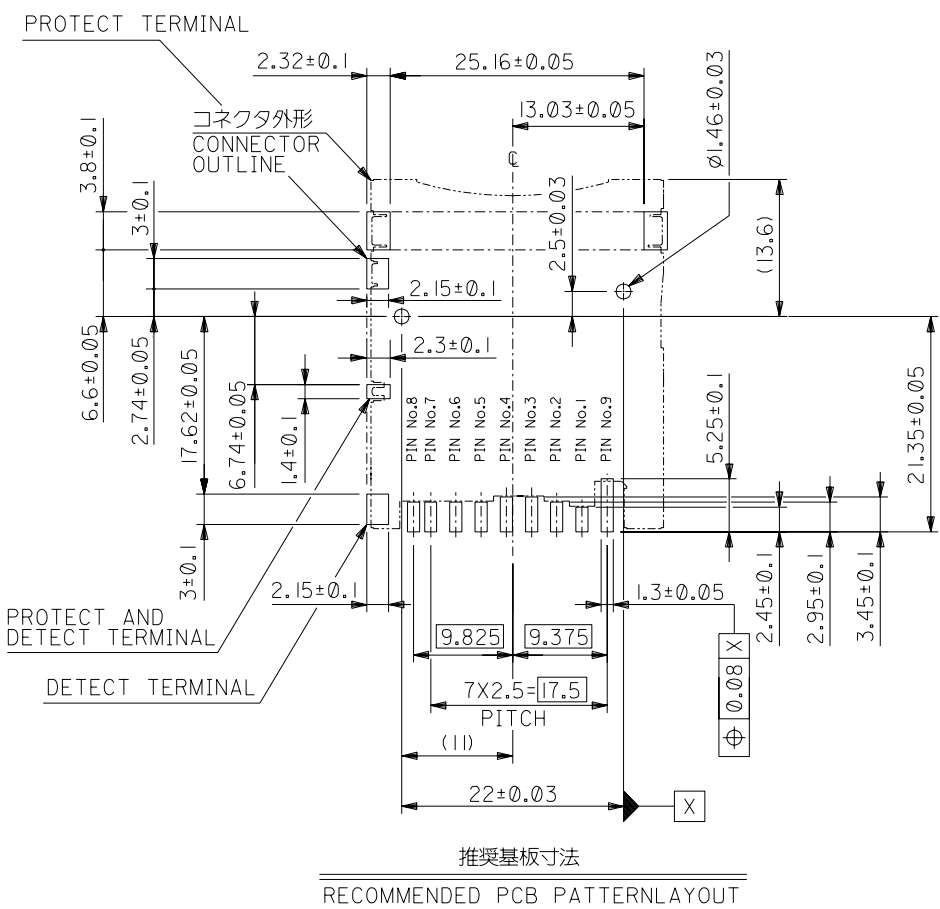

NO.	PARTS	QT'Y	MATERIAL	FINISHE
⑩	ネイル NAIL	2	銅合金 COPPER ALLOY	錫メッキ TIN PLATING
⑨	ディテクトターミナル DETECT TERMINAL	1	銅合金 COPPER ALLOY	接点部：金メッキ SELECTIVE GOLD PLATING
⑧	プロテクト & ディテクトターミナル PROTECT AND DETECT TERMINAL	1	銅合金 COPPER ALLOY	接点部：金メッキ SELECTIVE GOLD PLATING
⑦	プロテクトターミナル PROTECT TERMINAL	1	銅合金 COPPER ALLOY	接点部：金メッキ SELECTIVE GOLD PLATING
⑥	スプリング SPRING	1	ピアノ線 SWP	—
⑤	ピン PIN	1	ステンレス鋼 STAINLESS STEEL	—
④	金属カバー METAL COVER	1	ステンレス鋼 STAINLESS STEEL	—
③	ターミナル TERMINAL	9	銅合金 COPPER ALLOY	接点部：金メッキ SELECTIVE GOLD PLATING
②	スライダーカム SLIDER CAM	1	耐熱樹脂，UL94V-0 色：黒 HEAT RESISTANCE POLYMER UL94V-0, BLACK	—
①	ハウジング HOUSING	1	耐熱樹脂，UL94V-0 色：黒 HEAT RESISTANCE POLYMER UL94V-0, BLACK	—

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	RELEASED EC NO. J2004-4339 DRWN: H. KAWABATA 04/05/20 CHK: K. TOJO 04/05/20 APPR: M. SASAO 04/05/20	MATERIAL 材料 表記参照 SEE CHART FINISH 仕上げ 表記参照 SEE CHART WIRE RANGE 適用電線範囲 INS. RANGE 被覆外径
----------------------------------	----------------------------------	----------------------------------	----------------------------------	---	---

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差 10 UNDER 未滿 ±0.2 10 OVER 30 UNDER 未滿 ±0.25 30 OVER 以上 ±0.3 ANGLE 角度 ±3°	SCALE 2:1 DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH DRAWN BY & DATE H. KAWABATA 04/05/20 CHECKED BY & DATE K. TOJO 04/05/20 APPROVED BY & DATE M. SASAO 04/05/20 CAD FILENAME SD-54768-012.S02	MODEL NO. 54768-***72 DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY SHT REV REVERSE ON CAD ONLY TITLE: SD MEMORY CARD CONN. EJECT MECHANISM FOR PUSH/PUSH ASS'Y (REVERSE TYPE) -LEAD FREE- MOLEX MOLEX INCORPORATED MATERIAL NO. SEE CHART DRAWING NO. SD-54768-012 SHEET NO. 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. SIZE B
---	--	---	--