


# VH CONNECTOR

3.96 mm pitch/Disconnectable Crimp style connectors

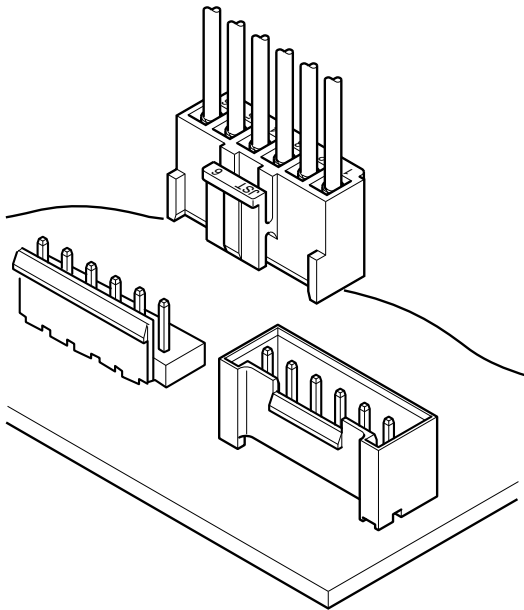

This small, field-proven connector for printed circuit boards is reliable and has a large current carrying capacity. It can be used with a wide variety of signal, power supply, and output circuits that appear in consumer electronic products.

- Proven box contact
- Compact connector with a large capacity
- Secure contact and mounting

## Specifications

- Current rating: 10 A AC/DC (AWG #16)
- Voltage rating: 250 V AC/DC
- Temperature range: -25°C to +85°C  
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 10 mΩ max.  
After environmental tests/ 20 mΩ max.
- Insulation resistance: 1,000 MΩ min.
- Withstanding voltage: 1,500 VAC/minute
- Applicable wire: AWG #22 to #16
- Applicable PC board thickness: 1.6 mm

Note:

Do not branch in parallel current which exceeds the rated current. If branched in parallel, current imbalance or other problems may develop. If it is absolutely necessary to branch such a large current in parallel, be sure to use contacts made of phosphor bronze. Design the circuits without causing imbalance and provide an extra margin for each circuit.

\* In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).

\* RoHS2 compliance

\* Dimensional unit: mm

\* Contact JST for details.

## Standards


Ⓜ Recognized E60389

Ⓢ Certified LR20812


⚠ R75122

## PC board layout and Assembly layout

### Locking header Top entry type

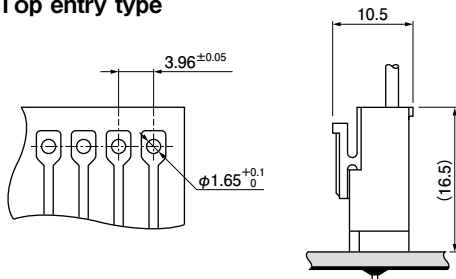


### Locking header Side entry type

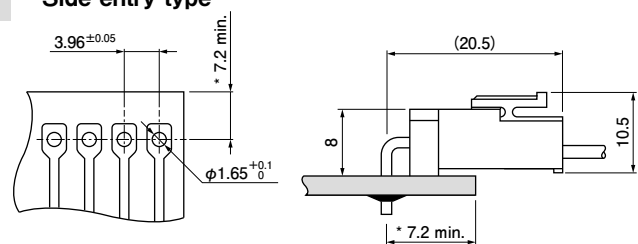


\*11.0 max. when used with the VR connector receptacle.

### Locking header Side entry type with PCB stabilizer

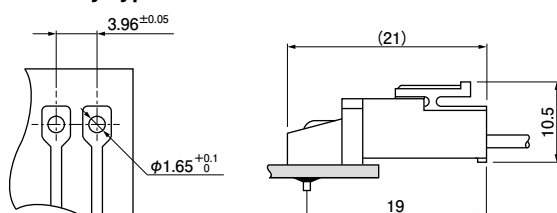

### Shrouded header

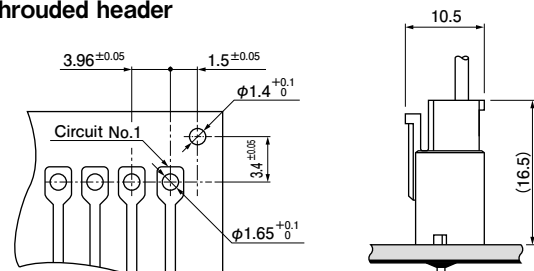

Note: 1. The above figure is the figure viewed from soldering side.


2. Tolerances are non-cumulative: ± 0.05 mm for all centers.

3. Please consider the pattern layout design in case of applying the large current.

4. Hole dimensions differ according to the type of PC board and piercing method. The dimensions above should serve as a guideline. Contact JST for details.

# VH CONNECTOR

## Contact

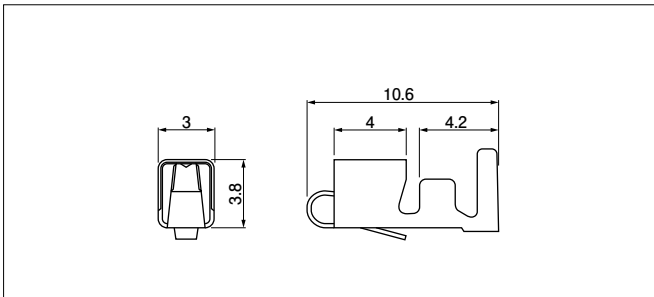

| Model No.    | Applicable wire |          | Insulation O.D. (mm) | Q'ty/reel |
|--------------|-----------------|----------|----------------------|-----------|
|              | mm <sup>2</sup> | AWG #    |                      |           |
| SVH-21T-P1.1 | 0.33 to 0.83    | 22 to 18 | 1.7 to 3.0           | 4,500     |
| SVH-41T-P1.1 | 0.5 to 1.25     | 20 to 16 | 1.7 to 3.0           | 3,500     |

### Material and Finish

Phosphor bronze, tin-plated (reflow treatment)


### RoHS2 compliance

Note: When using retainer mountable type housing, applicable wire's insulation O. D. shall be 1.7 to 2.2 mm.

| Contact      | Crimping machine | Applicator       |              |                            |
|--------------|------------------|------------------|--------------|----------------------------|
|              |                  | Crimp applicator | Dies         | Crimp applicator with dies |
| SVH-21T-P1.1 | AP-K2N           | MKS-L            | MK/SVH-21-11 | APLMK SVH21-11             |
| SVH-41T-P1.1 |                  |                  | MK/SVH-41-11 | APLMK SVH41-11             |

Note: Contact JST for fully automatic crimping applicator.

## Housing

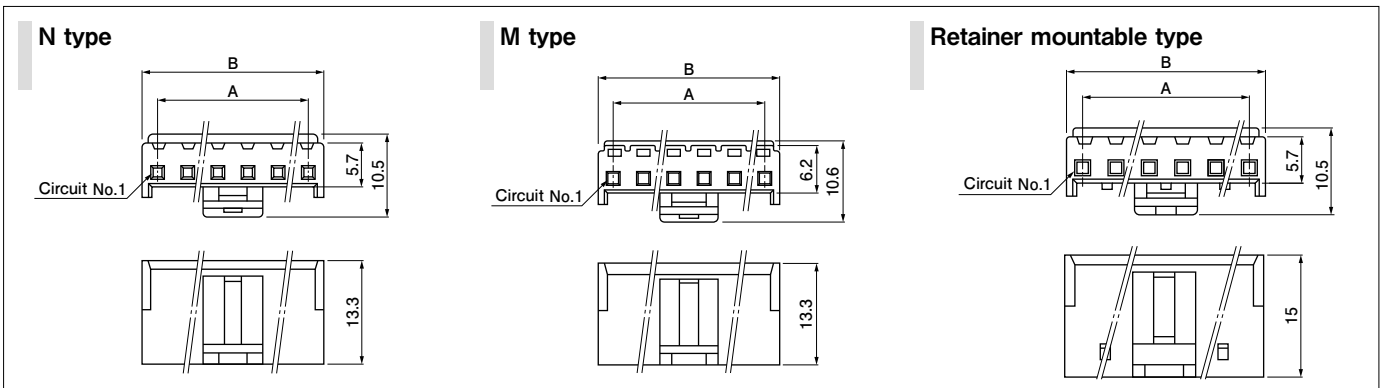

| No. of circuits | Model No. |        |                        | Dimensions (mm) |       | Q'ty/bag |
|-----------------|-----------|--------|------------------------|-----------------|-------|----------|
|                 | N type    | M type | Retaine mountable type | A               | B     |          |
| 2               | VHR-2N    | VHR-2M | VHRR-2N                | 3.96            | 7.86  | 1,000    |
| 3               | VHR-3N    | VHR-3M | VHRR-3N                | 7.92            | 11.82 | (*)      |
| 4               | VHR-4N    | VHR-4M | —                      | 11.88           | 15.78 | 1,000    |
| 5               | VHR-5N    | VHR-5M | VHRR-5N                | 15.84           | 19.74 | (*)      |
| 6               | VHR-6N    | VHR-6M | —                      | 19.80           | 23.70 | 500      |
| 7               | VHR-7N    | VHR-7M | VHRR-7N                | 23.76           | 27.66 | 500      |
| 8               | VHR-8N    | —      | VHRR-8N                | 27.72           | 31.62 | 500      |
| 9               | VHR-9N    | VHR-9M | VHRR-9N                | 31.68           | 35.58 | 500      |
| 10              | VHR-10N   | —      | —                      | 35.64           | 39.54 | 500      |
| 11              | VHR-11N   | —      | —                      | 39.60           | 43.50 | 500      |

### Material and Finish


PA 6, UL94V-0, natural (white)

### RoHS2 compliance

- Note: 1. Models identified as VHR-( ) M incorporate measures to prevent electric shock and are thus safer in regard to high voltages.  
 2. The applicable housing for 2 circuits shrouded header is "VHR-2N" only. "VHRR-2N" is not applicable.  
 3. Contact JST for Glow Wire compliant connectors.

(\*) N / M type ; 1,000  
 Retainer mountable type ; 500

## Retainer

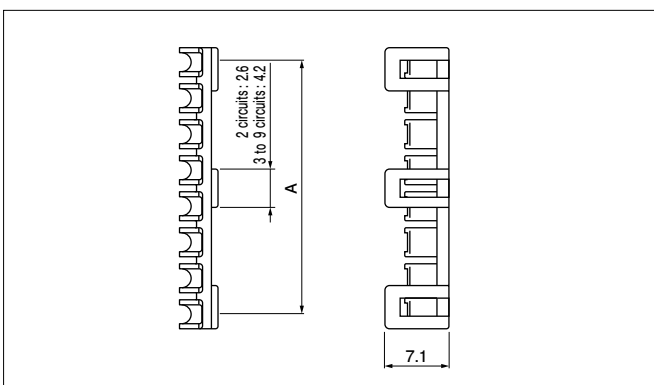

| No. of circuits | Model No. | A     | Q'ty/bag |
|-----------------|-----------|-------|----------|
| 2               | VHS-2V    | 3.70  | 1,000    |
| 3               | VHS-3V    | 7.52  | 1,000    |
| 5               | VHS-5V    | 15.44 | 1,000    |
| 7               | VHS-7V    | 23.36 | 1,000    |
| 8               | VHS-8V    | 27.32 | 1,000    |
| 9               | VHS-9V    | 31.28 | 1,000    |

### Material and Finish


Glass-filled PA 66, UL94V-0, natural (ivory)

### RoHS2 compliance


# VH CONNECTOR

## Locking header

### Top entry type

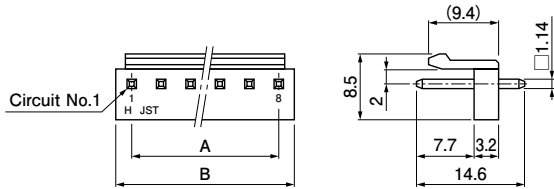

### Side entry type

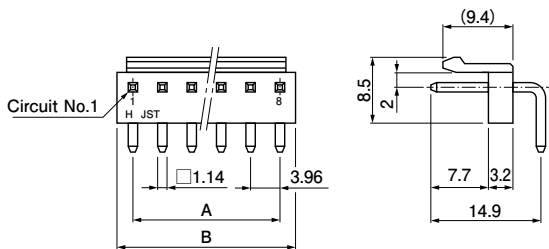


| No. of circuits | Model No.      |                 | Dimensions (mm) |       | Q'ty/box       |                 |
|-----------------|----------------|-----------------|-----------------|-------|----------------|-----------------|
|                 | Top entry type | Side entry type | A               | B     | Top entry type | Side entry type |
| 2               | B2P-VH         | B2PS-VH         | 3.96            | 7.86  | 1,000          | 1,000           |
| 3               | B3P-VH         | B3PS-VH         | 7.92            | 11.82 | 1,000          | 500             |
| 4               | B4P-VH         | B4PS-VH         | 11.88           | 15.78 | 500            | 500             |
| 5               | B5P-VH         | B5PS-VH         | 15.84           | 19.74 | 500            | 250             |
| 6               | B6P-VH         | B6PS-VH         | 19.80           | 23.70 | 250            | 250             |
| 7               | B7P-VH         | B7PS-VH         | 23.76           | 27.66 | 250            | 250             |
| 8               | B8P-VH         | B8PS-VH         | 27.72           | 31.62 | 200            | 200             |
| 9               | B9P-VH         | B9PS-VH         | 31.68           | 35.58 | 200            | 200             |
| 10              | B10P-VH        | B10PS-VH        | 35.64           | 39.54 | 200            | 100             |

#### Material and Finish


Post: Brass, copper-undercoated, tin-plated (reflow treatment)  
Wafer: PA 66, UL94V-0, natural (white)

**RoHS2 compliance** This product displays (LF)(SN) on a label.  
Note: 1. Headers with a reduced number of posts are also available.  
Contact JST for details.  
2. Contact JST for Glow Wire compliant connectors.

### Top entry type of PBT

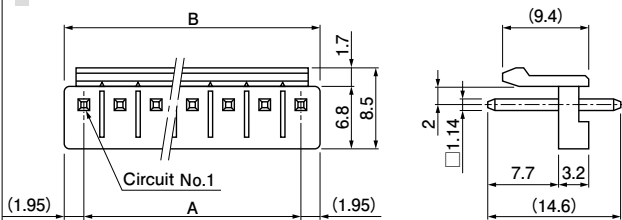

### Side entry type with PCB stabilizer

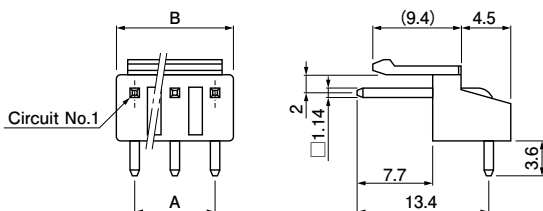

| No. of circuits | Model No.             |                                     | Dimensions (mm) |       | Q'ty/box       |                 |
|-----------------|-----------------------|-------------------------------------|-----------------|-------|----------------|-----------------|
|                 | Top entry type of PBT | Side entry type with PCB stabilizer | A               | B     | Top entry type | Side entry type |
| 2               | B2P-VH-B              | S2P-VH                              | 3.96            | 7.86  | 1,000          | 1,000           |
| 3               | B3P-VH-B              | S3P-VH                              | 7.92            | 11.82 | 1,000          | 500             |
| 4               | B4P-VH-B              | S4P-VH                              | 11.88           | 15.78 | 500            | 500             |
| 5               | B5P-VH-B              | S5P-VH                              | 15.84           | 19.74 | 500            | 250             |
| 6               | B6P-VH-B              | S6P-VH                              | 19.80           | 23.70 | 250            | 250             |
| 7               | B7P-VH-B              | S7P-VH                              | 23.76           | 27.66 | 250            | 250             |
| 8               | B8P-VH-B              | —                                   | 27.72           | 31.62 | 200            | —               |
| 9               | B9P-VH-B              | —                                   | 31.68           | 35.58 | 200            | —               |
| 10              | B10P-VH-B             | —                                   | 35.64           | 39.54 | 200            | —               |
| 11              | B11P-VH-B             | —                                   | 39.60           | 43.50 | 200            | —               |


#### Material and Finish

Post: Brass, copper-undercoated, tin-plated (reflow treatment)  
Wafer: Top entry type of PBT: Glass-filled PBT, UL94V-0, natural (white)  
Side entry type with PCB stabilizer: PA 66, UL94V-0, natural (white)

**RoHS2 compliance** This product displays (LF)(SN) on a label.

# VH CONNECTOR

## Shrouded header

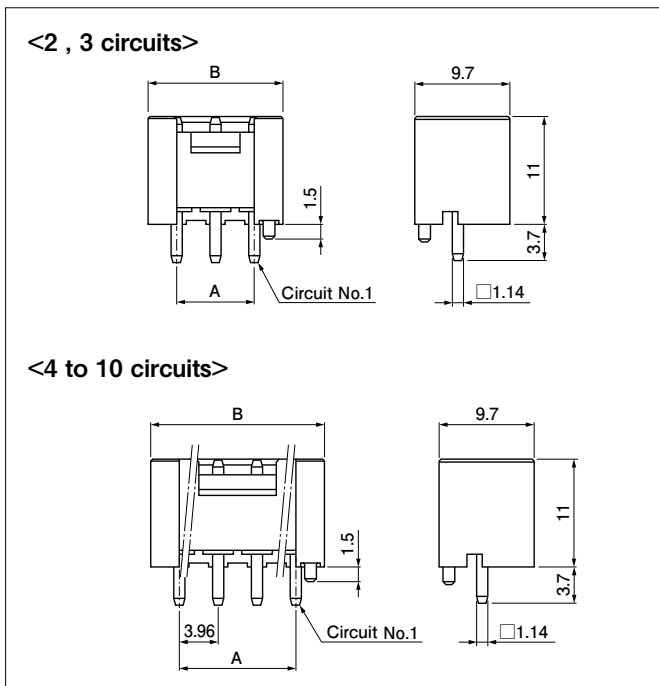

| No. of circuits | Model No.    | Dimensions (mm) |       | Q'ty/box |
|-----------------|--------------|-----------------|-------|----------|
|                 |              | A               | B     |          |
| 2               | B2P-VH-FB-B  | 3.96            | 9.80  | 250      |
| 3               | B3P-VH-FB-B  | 7.92            | 13.76 | 200      |
| 4               | B4P-VH-FB-B  | 11.88           | 17.72 | 150      |
| 5               | B5P-VH-FB-B  | 15.84           | 21.68 | 200      |
| 6               | B6P-VH-FB-B  | 19.80           | 25.64 | 200      |
| 7               | B7P-VH-FB-B  | 23.76           | 29.60 | 100      |
| 8               | B8P-VH-FB-B  | 27.72           | 33.56 | 100      |
| 9               | B9P-VH-FB-B  | 31.68           | 37.52 | 100      |
| 10              | B10P-VH-FB-B | 35.64           | 41.48 | 125      |


### Material and Finish

Post: Copper alloy, copper-undercoated, tin-plated (reflow treatment)  
Wafer: Glass-filled PBT, UL94V-0, natural (white)


**RoHS2 compliance** This product displays (LF)(SN) on a label.  
**Note:** The applicable housing for 2 circuits shrouded header is "VHR-2N" only. "VHRR-2N" is not applicable.

## Model number allocation


### Contact

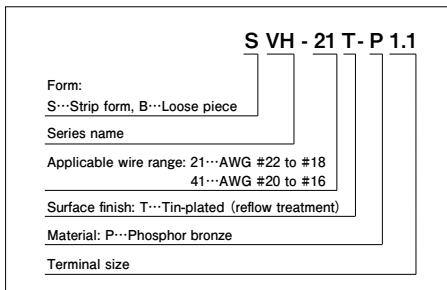


### Housing

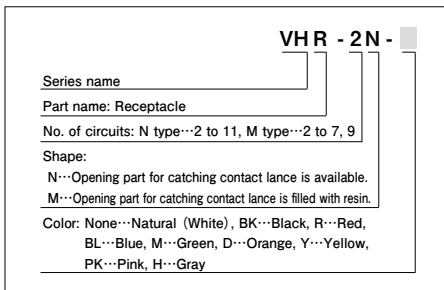


### Retainer mountable type housing

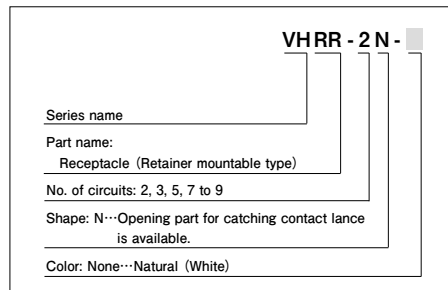


### Retainer

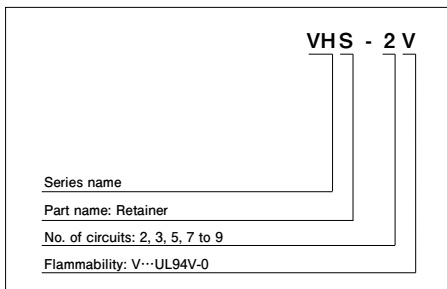


### Header

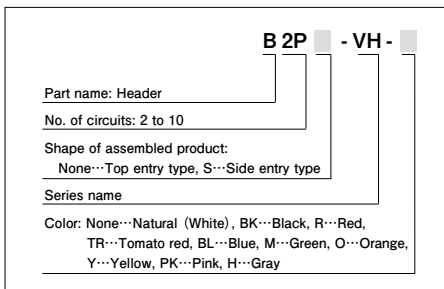


### Header Top entry type of PBT

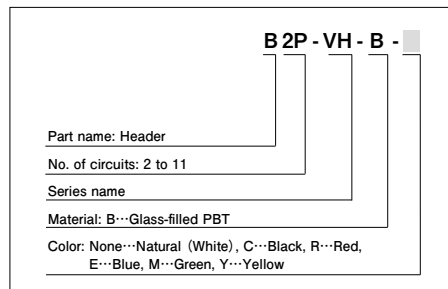

### Header Side entry type with PCB stabilizer

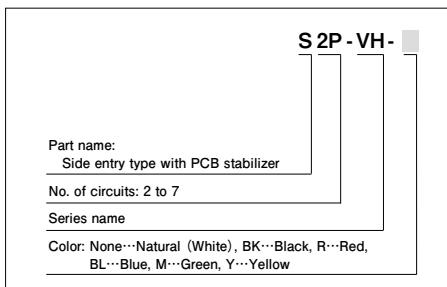

### Shrouded header

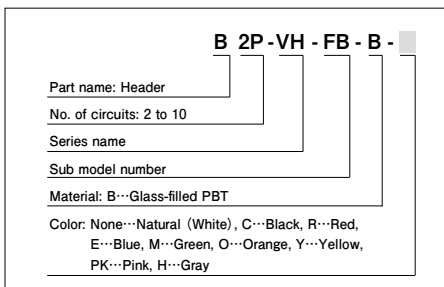

Note: Depending on the colors, it may take some time for delivery.

# VH CONNECTOR

## Post-omitted Header

- 1) When giving the polarity to the product by removing the post (N-1)th circuit  
 However, since the product that the 2nd post of 3-circuit connector is omitted doesn't have polarity, select 3).

**B \*1 P \*2 -VH**

\*1; No. of circuits (No. of posts)  
 \*2; Circuit No. of used original header

e.g.)

|                |         |   |   |   |   |   |   |
|----------------|---------|---|---|---|---|---|---|
| Circuit No.    | 1       | 2 | 3 | 4 | 5 | 6 | 7 |
| Circuit (post) | ○       | ○ | ○ | ○ | ○ | × | ○ |
| Model No.      | B6P7-VH |   |   |   |   |   |   |

○; With circuit (post) ×; Without circuit (post)

- 2) When giving the polarity to the product by removing the post in 2nd circuit  
 However, since the product that the 2nd post of 3-circuit connector is omitted doesn't have polarity, select 3).

**B \*1 P \*2 -VH-L**

e.g.)

|                |           |   |   |   |   |   |   |
|----------------|-----------|---|---|---|---|---|---|
| Circuit No.    | 1         | 2 | 3 | 4 | 5 | 6 | 7 |
| Circuit (post) | ○         | × | ○ | ○ | ○ | ○ | ○ |
| Model No.      | B6P7-VH-L |   |   |   |   |   |   |

- 3) When the pitch is set again  
 1. When setting two times of pitch with omitting every other one post  
 However, posts shall be inserted in No.1-circuit and No. N-circuit.

**B \*1 P \*2 -VH**

e.g.)

|                |         |   |   |   |   |   |   |
|----------------|---------|---|---|---|---|---|---|
| Circuit No.    | 1       | 2 | 3 | 4 | 5 | 6 | 7 |
| Circuit (post) | ○       | × | ○ | × | ○ | × | ○ |
| Model No.      | B4P7-VH |   |   |   |   |   |   |

2. When setting three times of pitch with omitting every other two posts  
 However, posts shall be inserted in No.1-circuit and No. N-circuit.

**B \*1 P \*2 -VH**

e.g.)

|                |         |   |   |   |   |   |   |
|----------------|---------|---|---|---|---|---|---|
| Circuit No.    | 1       | 2 | 3 | 4 | 5 | 6 | 7 |
| Circuit (post) | ○       | × | × | ○ | × | × | ○ |
| Model No.      | B3P7-VH |   |   |   |   |   |   |

3. When setting four times of pitch with omitting every other three posts  
 However, posts shall be inserted in No.1-circuit and No. N-circuit.

**B \*1 P \*2 -VH**

e.g.)

|                |         |   |   |   |   |   |   |   |   |
|----------------|---------|---|---|---|---|---|---|---|---|
| Circuit No.    | 1       | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Circuit (post) | ○       | × | × | × | ○ | × | × | × | ○ |
| Model No.      | B3P9-VH |   |   |   |   |   |   |   |   |