
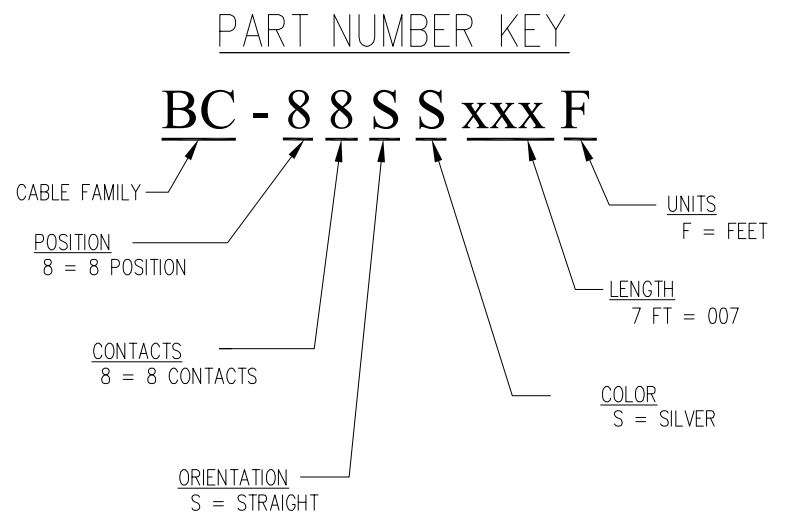


DATE	REV	ECN	APP'D. BY
10/25/19	A0	-	JME
12/04/19	A1	11483	ADB

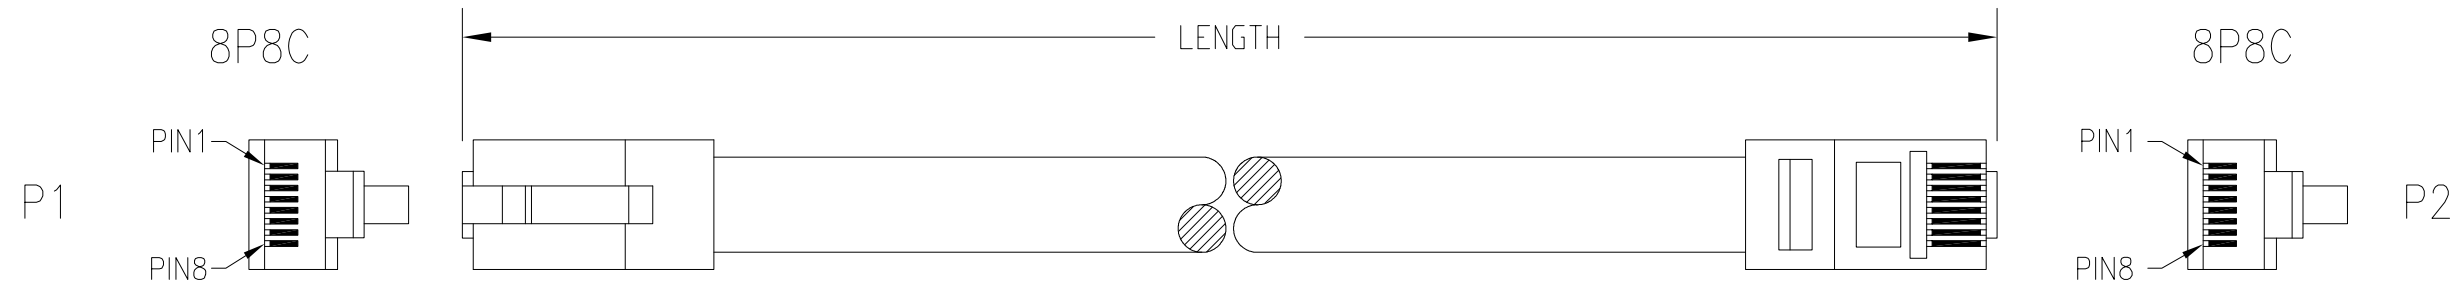

O/A Length Tolerance:

Metric	
0 ~ 200mm	±10mm
201 ~ 1000mm	±20mm
1001 ~ 1500mm	±25mm
1501 ~ 2100mm	±30mm
>2100mm	±40mm

Imperial	
0 ~ 1ft	±0.5in
2ft ~ 3ft	±0.75in
4ft ~ 7ft	±1.0in
> 7ft	±1.5in

NOTES:

1. EACH CABLE ASSEMBLY INDIVIDUALLY BAGGED
2. WIRE CONSTRUCTION: 28 AWG WIRE, FLAT TELEPHONE, OD 0.01 x 0.34", SILVER/GREY INSULATION
3. CONNECTOR P1: 8P8C MODULAR PLUG, GOLD FLASH ON CONTACTS
4. CONNECTOR P2: 8P8C MODULAR PLUG, GOLD FLASH ON CONTACTS
5. VOLTAGE RATING: 300 V
6. CONDUCTOR RESISTANCE: 8 Ω
7. INSULATION RESISTANCE: 5M Ω

WIRING MAP

P1	P2	
1	1	BLUE
2	2	ORANGE
3	3	BLACK
4	4	RED
5	5	GREEN
6	6	YELLOW
7	7	BROWN
8	8	WHITE

TYPICAL PART NUMBERS

PART NUMBER	LENGTH FEET [METERS]
BC-88SS007F	7 [2.13]

FOR PART NUMBERS NOT SHOWN FOLLOW PART NUMBER KEY FORMAT



THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°

SHEET NO. 1 OF 1

206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

TITLE: RJ45 PATCHCORD CABLE WITH 8 POSITION, 8 CONTACT MODULAR PLUGS (STRAIGHT)

DRN BY: BTS	DATE: 10/23/19
APPD BY: JME	DATE: 10/23/19
DWG NO. CT999207	REV. A1

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.