



RKP117 / 119 Single Console



Drawer Features & Display Benefits

- ▶ 1U 17" or 19" LCD console drawer
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ Short depth design of 460mm and 500mm respectively
- ▶ New enhanced aesthetics with molded front handle
- ▶ Front USB port for device access (USB Hub KVM only)

Options

- S-Video + Composite (BNC)
- HDMI or DVI-D (either one)
- 2-post rack mounting brackets (**ORB-2.1**)
- DC power : 12V / 24V / 48V / 125V / 250V

Specifications

• LCD Panel

Manufacturer :	AUO	AUO
Size (diagonal) :	17" TFT	19" TFT
Max resolution :	1280 x 1024	1280 x 1024
Brightness (cd/m2) :	250	250
Backlight :	LED	LED
Colors :	16.7 M	16.7 M
Contrast ratio (typ) :	1000 : 1	1000 : 1
Viewing angle (H/V) :	170° x 160°	170° x 160°
Active area (mm) :	338 x 270	376 x 301
MTBF (hrs) :	30,000	30,000
Video input :	VGA	VGA

- **Speaker :** Built-in Dual Stereo Speakers (HDMI only)
2W x 2
- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption (single console)

Sreen on :	Max. 25W
Power saving mode :	Max. 4W
Power button on :	Max. 1W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

- **Casing Color :** Black (RAL 9005)

• Regulatory

Safety :	cUL, FCC & CE certified
Environmental :	RoHS2 & REACH compliant

• Weight (single console)

	Net	Gross
RKP117 :	12 kgs / 26 lbs	16.6 kgs / 36.5 lbs
RKP119 :	12.7 kgs / 27.9 lbs	17.3 kgs / 38.1 lbs

• Product Dimensions (single console)

RKP117 :	441.6 x 460 x 44 mm / 17.4 x 18.1 x 1.73 inch
RKP119 :	441.6 x 500 x 44 mm / 17.4 x 19.7 x 1.73 inch

• Packing Dimensions (single console)

RKP117 / 119 :	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch
----------------	---



Console Cable

CE-6


- 6 feet Combo KVM cable (bundle)
- VGA + USB or PS/2, server end
- DB15 (VGA, USB KB & MS), console port

Keyboard

Ge G keyboard integrated with touchpad

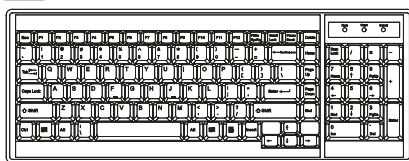

Gb G keyboard integrated with trackball

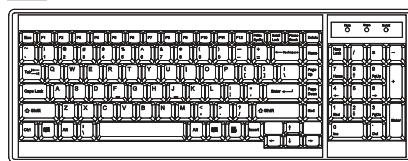

Supporting layouts

America	United States
EMEA	United Kingdom Germany France Spain Norway
	Italy Russia Switzerland Netherlands Portugal
Asia	China Japan Korea Arabia Turkey

