

Ratings
 Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1



Conductor
 Conductor count: 3
 Gauge: 20 AWG 0.52 mm²
 Material: PVC
 Strand size: Ø 0.16 x 26
 Resistance at 20 °C: 36.7 Ω /km max

Insulator
 Material: PVC
 Color: black, white, red
 Diameter: Ø 1.55 ±0.1 mm
 Nominal thickness: 0.28 mm
 Resistance at 20 °C: 10 MΩ /km min

Outer jacket
 Material: PVC
 Color: black
 Diameter: Ø 4.95 ± .2 mm
 Nominal thickness: 0.8 mm

Wire marking: E339579 UL AWM STYLE 2464 20 AWG 80°C
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 LF TENSILITY

Tests
 Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ±1 °C /1 hour, no observed degradation
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ±2 °C /1 hour, no observed cracking

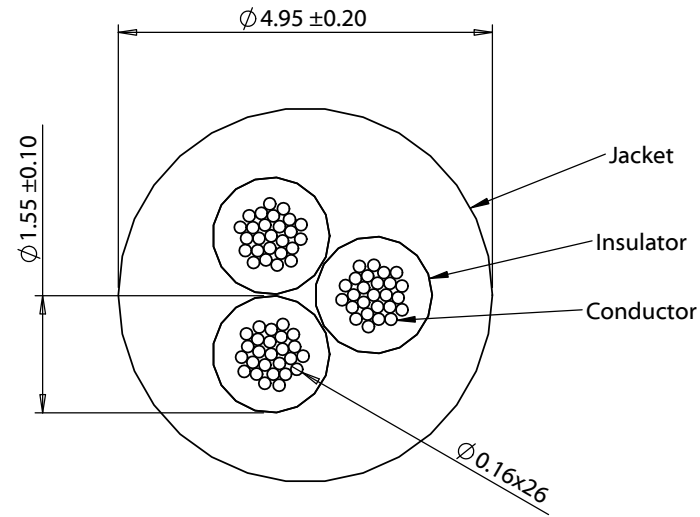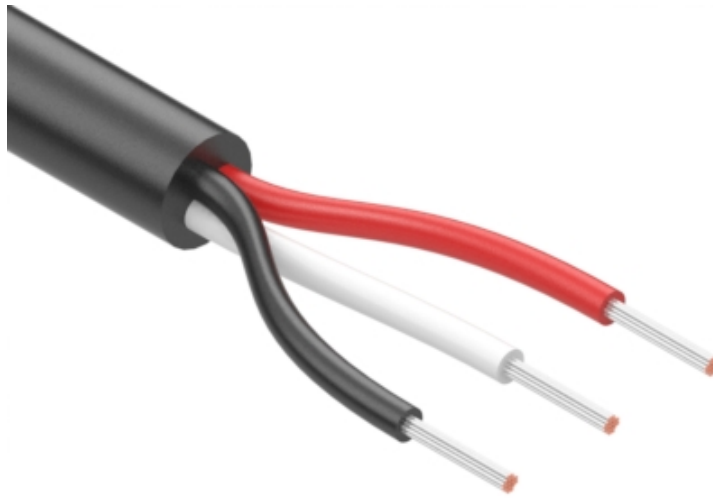

| Revision: | Date: | Description: |
|-----------|------------|---------------------------------------|
| A | 06/24/2014 | Initial release |
| A1 | 09/05/2018 | Increased operating temperature range |
| | | |
| | | |
| | | |

Prepared:
GL
Digitally signed by GL
 Date: 2018.09.05
 15:48:32 -07'00'

Verified:
PS
Digitally signed by PS
 Date: 2018.09.05
 16:07:15 -07'00'

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:
 RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:
 Wire, 3C TS, 20 AWG, UL2464, 300V, 80C, 4.95 mm, VW-1, PVC

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size: A Part number: 30-00368

Scale: 10:1

Sheet 1 of 1