


REVISIONS

REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	09/10/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO CENTER OF CONNECTORS. EXAMPLE(S) SHOWN BELOW:

LTI P/N: CB0.81-2IPX4L-6IN-60 (6 INCHES)
 CB0.81-2IPX4L-11.5IN-60 (11.5 INCHES)

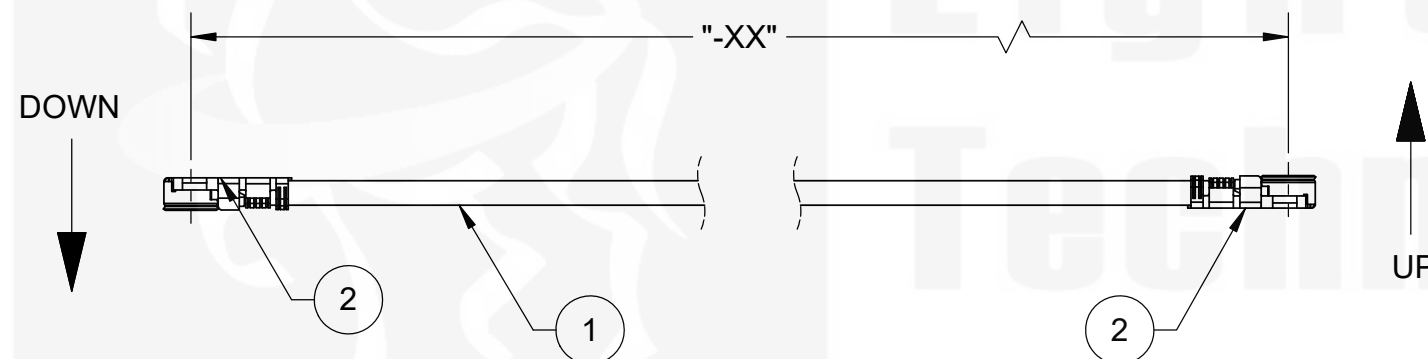


LENGTH TOLERANCE FOR CABLE ASSEMBLIES	
Inches	Millimeters
0 - 2IN +/- 0.040	0 - 51 +/- 1
2IN - 6IN +/- 0.080	51 - 153 +/- 2
6IN - 12IN +/- 0.140	153 - 305 +/- 3.5
12IN - 48IN +/- 0.250	305 - 1219 +/- 6.4
48IN - 144IN (12FT) +/- 0.500	1219 - 3658 +/- 13
144IN (12FT) - ABOVE +/- 1.0	3658 - ABOVE +/- 25

UNLESS OTHERWISE SPECIFIED ON DRAWING

ITEM	PART NUMBER	DESCRIPTION	QTY
1	0.81MM MICRO COAX	CABLE, 0.81 MICRO COAX, WHITE	AR
2	IPX4LLF11GPB-081	IPX4L (MHF4L), RHT ANGLE, JACK, CABLE CRIMP	2

MHF IS A REGISTERED TRADEMARK OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		 Lighthouse Technologies San Diego, CA WWW.RFCONNECTOR.COM	
TOLERANCES UNLESS OTHERWISE SPECIFIED			
DIMENSIONS ARE IN MILLIMETERS X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30'		TITLE: CABLE ASSY, IPX4L (MHF4L), R/A JACK TO IPX4L (MHF4L), R/A JACK, 0.81 MICRO COAX, WHITE, OPPOSITE ORIENTATION	
CUSTOMER APPROVAL SIGN / DATE:		SIZE	REV
ENG APPR.		B	1
CHECKED		PART/DWG. NO: CB0.81-2IPX4L-XXIN-60	
DRAWN	P. BURDGE	SCALE: 4:1	
	NAME	FILE NAME	SHEET 1 OF 1
	DATE		

PROPRIETARY AND CONFIDENTIAL
 UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHORSE TECHNOLOGIES. LIGHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

