


Eveready 1250

D
SUPER HEAVY DUTY



Industry Standard Dimensions

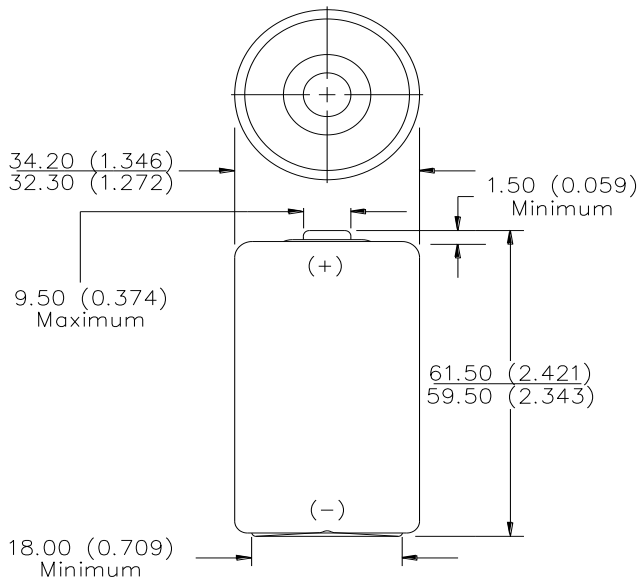

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)

Designation: ANSI-13D, IEC-R20

Battery Voltage: 1.5 Volts

Operating Temp: -18°C to 55°C (0°F to 130°F)

Average Weight: 89.0 grams (3.1 oz.)


Volume: 53 cubic centimeters (3.2 cubic inch)

Average Capacity: 8,000 mAh to 0.8 volts
(Rated at 25 mA continuous at 21°C)


Cell: One No. 50 (size "D")

Jacket: Metal


TYPICAL PERCENT SERVICE
3.9 ohm - 4 hours/day to 0.75 volts

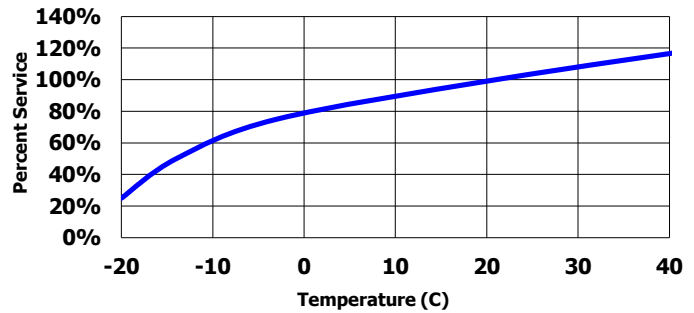

CONSTANT RESISTANCE PERFORMANCE
Typical Service

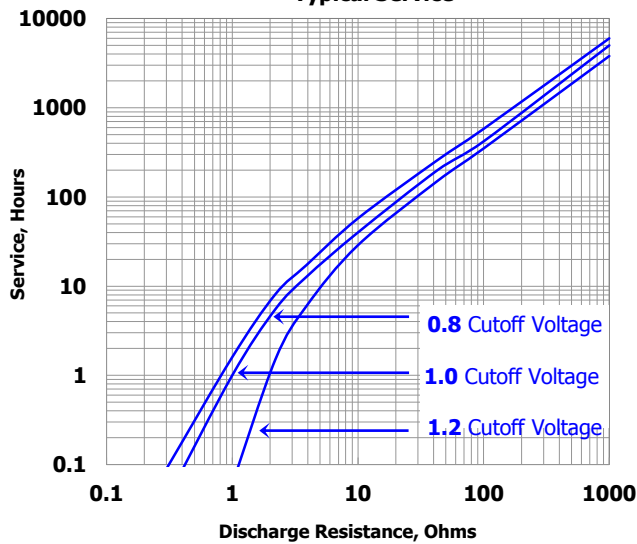

CONSTANT CURRENT DISCHARGE
Typical Service

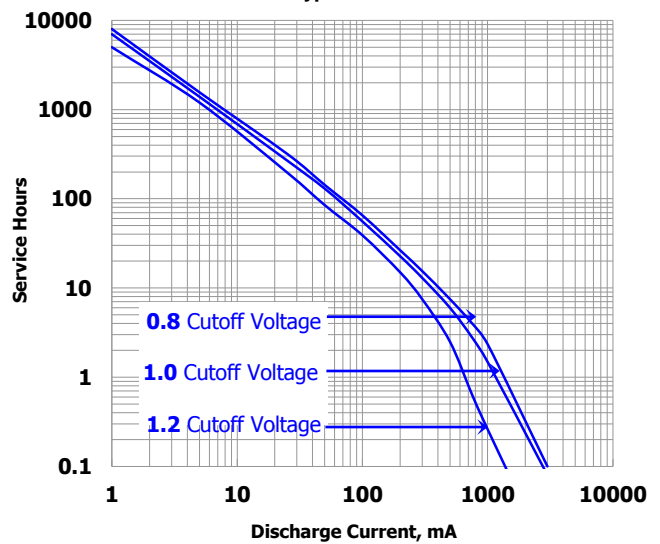


Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.


Eveready 1250

ANSI Industry Standard Tests @ 20° C

RADIO
10 ohm - 4 hours/day

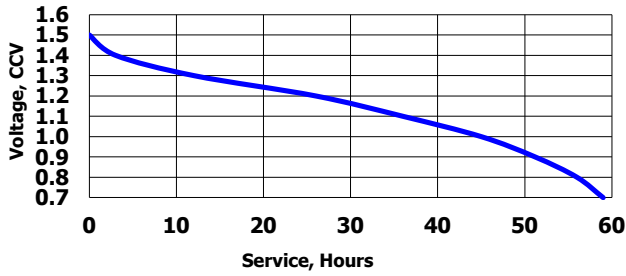


PORTABLE STEREO
3.9 ohm - 1 hr/day

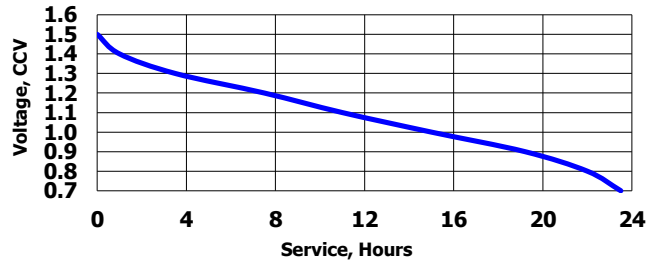

TOY
2.2 ohm - 1 hr/day



PORTABLE LIGHT
2.2 ohms - 4 min/hour 8 hours/day

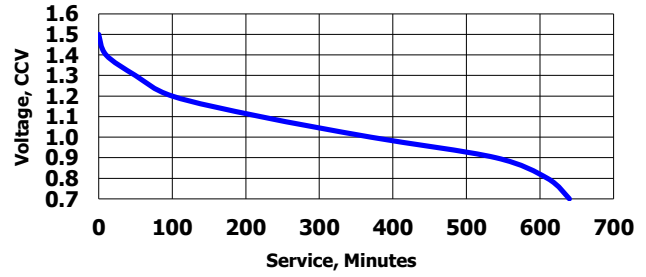

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.