

# MCL0606FYW1RD1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Red




VENKEL LTD.

Part Number	Size	Emitting Color	Emitting Material	Lens-Color	Luminous Intensity mcd	Wavelength nm $\lambda_P$	Viewing Angle ( $2\theta$ 1/2)
MCL0606FYW1RD1T	0606	Yellow, Red	AlGaInP, AlGaInP	Clear	Yellow: 50mcd Min 80mcd Typ Red: 32mcd Min 50mcd Typ	Yellow: 598nm typ Red: 640nm typ	130°


Electrical & Optical Specifactions ( $T_A=25^\circ\text{C}$ )		Yellow @20mA	Red @20mA	Unit
Forward Voltage Min.	$V_F$	1.7	1.5	V
Forward Voltage Max.	$V_F$	2.6	2.4	V
Reverse Current (Max) ( $V_R=5V$ )	$I_R$	10	10	$\mu\text{A}$
Peak Wavelength Typ.	$\lambda_P$	598	640	nm
Dominant Wavelength Typ.	$\lambda_D$	595	630	nm
Spectral Line Half Width Typ.	$\Delta\lambda$	15	20	nm

Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ )		Yellow	Red	Unit
Reverse Voltage	$V_R$	5	5	V
DC Forward Current	$I_F$	30	30	mA
Peak Forward Current 1/10 Duty Cycle @ 10KHz	$I_{FP}$	60	90	mA
Power Dissipation	$P_D$	75	72	mW
Operating Temperature	$T_A$	-20 ~ +80		°C
Storage Temperature	$T_{stg}$	-30 ~ +100		

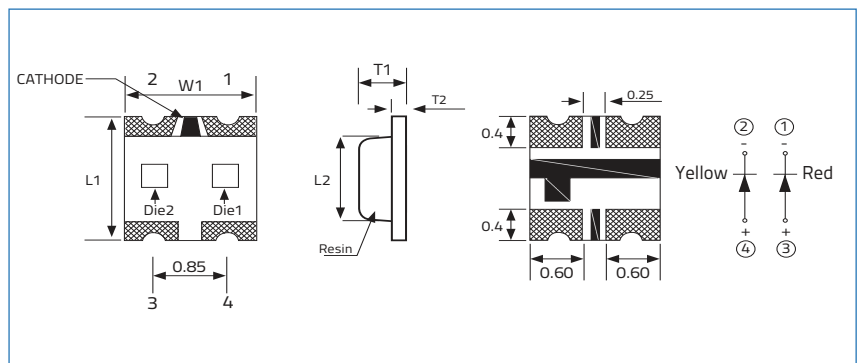

Dimensions		Units: Inches (mm)	
$L_1$	$T_1$	$T_2$	$W_1$
0.063±0.004 (1.6±0.1)	0.0216±0.004 (0.55±0.1)	0.0071±0.004 (0.18±0.1)	0.059±0.004 (1.5±0.1)

## Soldering Pad Layout

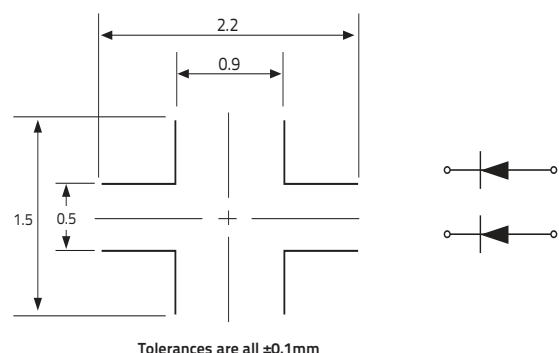

# MCL0606FYW1RD1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Red



VENKEL LTD.

## Graphs for Yellow (AlGaInP)

Fig.1 Forward Current vs Forward Voltage

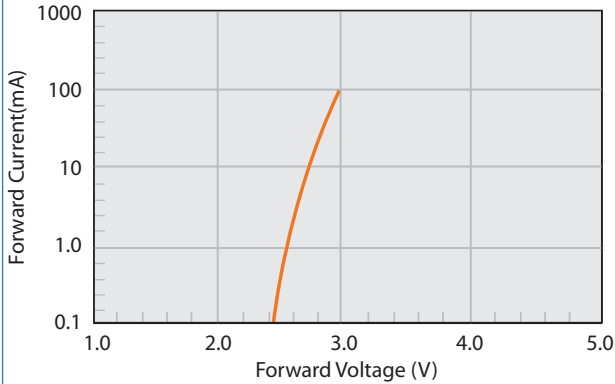


Fig.4 Relative Intensity vs Temperature

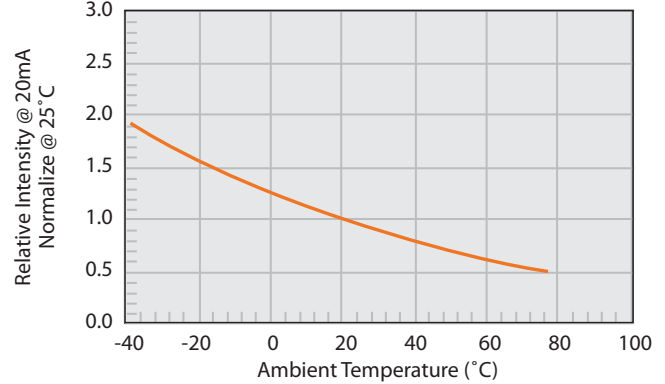


Fig.2 Relative Intensity vs Forward Current

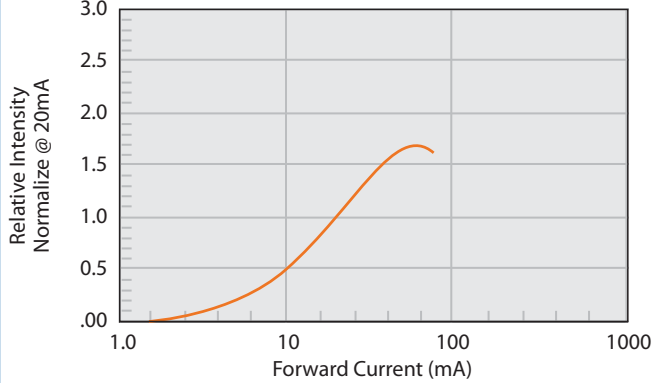


Fig.5 Relative Intensity vs Wavelength



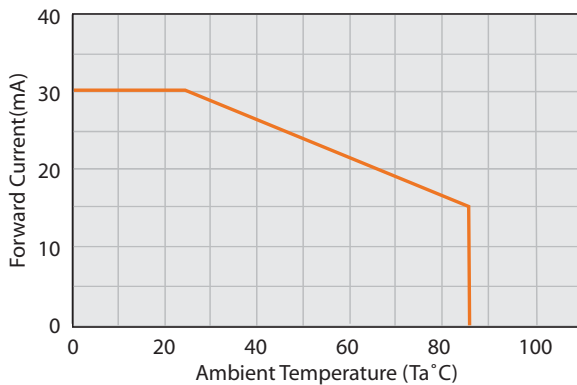


Fig. 6 Direct Radiation

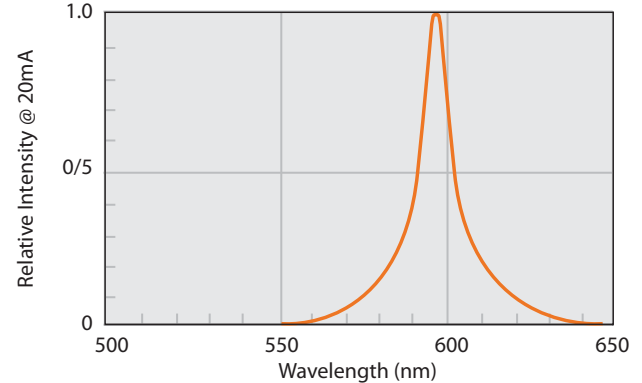

# MCL0606FYW1RD1T DATASHEET


Multi Color LED, 0606, Flat Lens, Yellow, Red

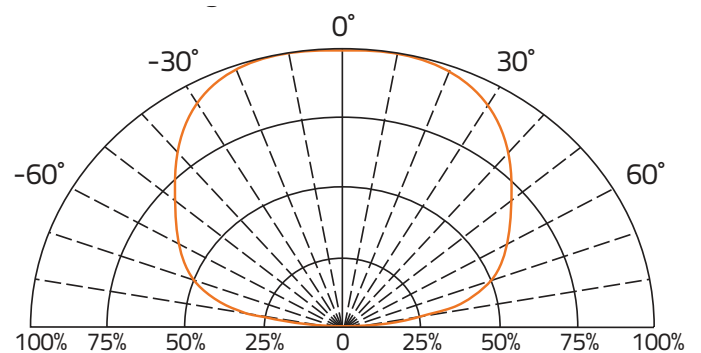


VENKEL LTD.

## Graphs for Red (AlGaInP)


**Fig.1 Forward Current vs Forward Voltage**

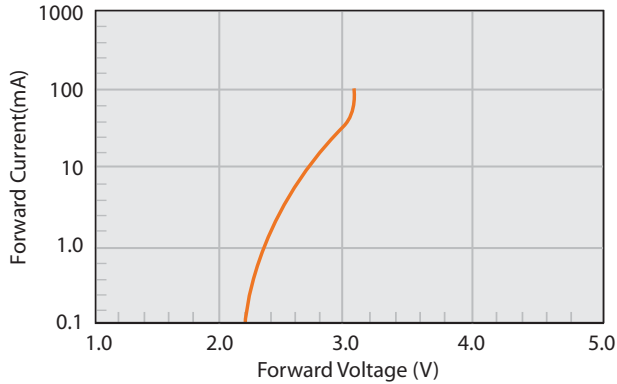


**Fig.2 Relative Intensity vs Forward Current**

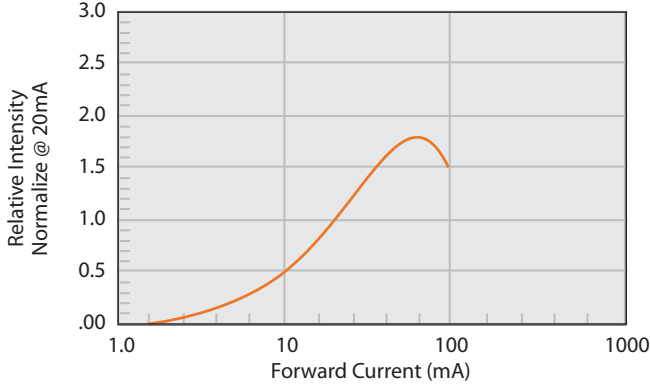


**Fig.3 Current vs Temp**

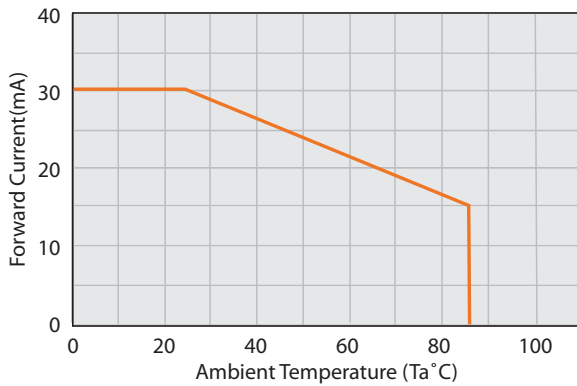


**Fig.4 Relative Intensity vs Temperature**

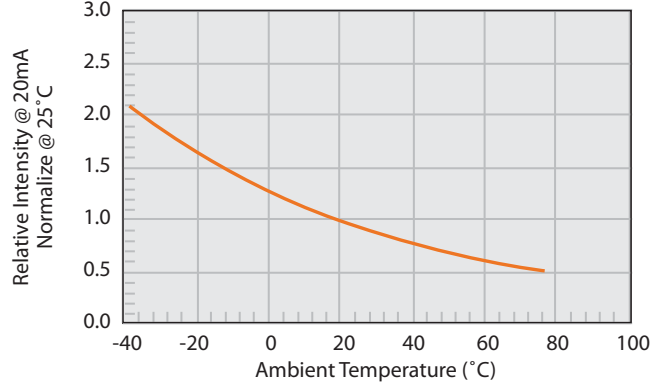

**Fig.5 Relative Intensity vs Wavelength**

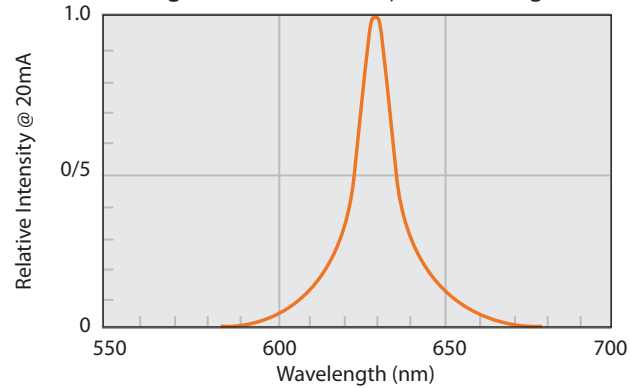

**Fig. 6 Direct Radiation**

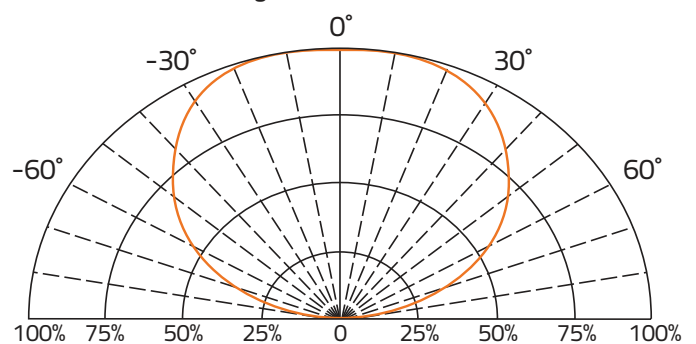

### Environmental information

RoHS Status	6 of 6 Compliant
REACH Status	Compliant
Halogen Status	Halogen Free
Conflict Mineral Status	Conflict Mineral Free
Moisture Sensitivity Level (MSL)	3

### Reflow profile

Max Reflow Temperature	260°C
Number of Reflow Cycles	2

# MCL0606FYW1RD1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Red



VENKEL LTD.

## Label Example

Item: MCL0606FYW1RD1T

Chip Type LED,0606,Flat Lens,Yellow,Red

Qty: 4000

D/C: 1616

Lot: GS115A0168

VF: 1.7-2.6

BIN/HUE: Q/18-P/30

VF: 1.5-2.4

**VENKEL LTD**

**YOUR SINGLE SOURCE FOR SURFACE MOUNT PASSIVES**

## Codes:

VF: Forward Voltage | BIN: Luminous Intensity | HUE: Dominant Wavelength

## Luminous Intensity Classification (BIN Code)

Yellow BIN Code	Iv(mcd) at 20mA	
	Min.	Max.
P	50	80
Q	80	125
R	125	200
S	200	320

Red BIN Code	Iv(mcd) at 20mA	
	Min.	Max.
N	32	50
P	50	80
Q	80	125
R	125	200

## Dominant Wavelength Classification (HUE Code)

$\lambda D$ (nm) at 20mA					
Yellow			Red		
Hue Code	Min.	Max.	Hue Code	Min.	Max.
17	589	592	29	624	627
18	592	595	30	627	630
19	595	598	31	630	633
20	598	600	32	633	636

# MCL0606FYW1RD1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Red



VENKEL LTD.

Reel Specifications		Units: mm		
<b>M</b>	<b>C</b>	<b>F</b>	<b>E</b>	<b>G</b>
178±1.50	56.0±1.0	12.0±1.0	60.0±1.0	9.0±1.0

Packaging Specifications	
Reel Size:	7"
Quantity per Reel :	4,000

Storage Specifications
1. Storage temperature and RH: 5°C~35°C, RH60%
2. Once the package is opened, the LEDs should be used within a week. Otherwise, they should be kept in a moisture proof bag with desiccant. We suggest that you use this product within one year from date code.
3. If opened for more than one week in an atmosphere of 5°C~35°C, RH60%. The parts should be heat treated at 60°C±5°C for 15 hours.

Tape Specifications		Units: mm		
<b>T</b>	<b>W</b>	<b>A</b>	<b>B</b>	<b>F</b>
0.70±0.5	8.0±0.3	1.75±0.5	1.65±0.1	3.5±0.2
<b>E</b>	<b>H</b>	<b>J</b>	<b>D</b>	<b>G</b>
1.75±0.1	4.0±0.2	2.0±0.1	1.5±0.1	4.0±0.2

# MCL0606FYW1RD1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Red



VENKEL LTD.


## Environmental Test Criteria

Classification	Test Item	Test Condition	Sample Size
Endurance Test	Operating Life	1. Ta=25°C 2. If=20mA 3. t=1000hrs (-24hrs, +72hrs)	22
	High Temperature Storage	1. Ta=105°C±5°C 2. t=1000hrs (-24hrs, +72hrs)	22
	Low Temperature Storage	1. Ta=-40°C±5°C 2. t=1000hrs (-24hrs, +72hrs)	22
	High Temperature, High Humidity Storage	1. Ta=85°C 2. RH=85% 3. t=1000hrs(-24hrs, +72hrs)	22
Environmental Test	Thermal Shock	1. Ta=100°C±5°C & -40°C±5°C 20min / 10sec / 20min 3. Total: 100 cycles total	22
	Temperature Cycling	1. 100°C±5°C & -40°C±5°C 30mins / 5mins / 30mins 2. 100 Cycles	22
	IR Reflow	1. T=260°C Max. 10 seconds Max 2. 6 Min	22

## Drive Method

LED is a current operated drive, and therefore it requires some kind of current limiting incorporated into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED. Consider worst case voltage variations that can occur across the current limiting resistor placed in series with the LED. The forward current should not be allowed to change by more than 40% of its desired value.

Circuit model A

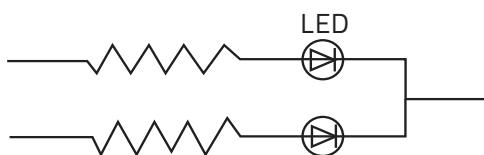

Circuit model B

