



Direct starter, 3RM1, 500 V, 0.09 - 0.75 kW, 0.4 - 2 A, 110-230 V AC, screw terminals

| | |
|---|---|
| product brand name | SIRIUS |
| product category | Motor starter |
| product designation | Direct-on-line starter |
| design of the product | with electronic overload protection |
| product type designation | 3RM1 |
| General technical data | |
| trip class | CLASS 10A |
| equipment variant according to IEC 60947-4-2 | 3 |
| product function | Direct-on-line starter |
| • intrinsic device protection | Yes |
| • for power supply reverse polarity protection | No |
| suitability for operation device connector 3ZY12 | No |
| insulation voltage rated value | 500 V |
| overvoltage category | III |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| • between main and auxiliary circuit | 500 V |
| • between control and auxiliary circuit | 250 V |
| shock resistance | 6g / 11 ms |
| vibration resistance | 1 ... 6 Hz, 15 mm; 20 m/s ² , 500 Hz |
| operating frequency maximum | 1 1/s |
| mechanical service life (switching cycles) typical | 30 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 03/01/2017 |
| product function | |
| • direct start | Yes |
| • reverse starting | No |
| product function short circuit protection | No |
| Electromagnetic compatibility | |
| EMC emitted interference according to IEC 60947-1 | class A |
| EMC immunity according to IEC 60947-1 | Class A |
| conducted interference | |
| • due to burst according to IEC 61000-4-4 | 3 kV / 5 kHz |
| • due to conductor-earth surge according to IEC 61000-4-5 | 2 kV |
| • due to conductor-conductor surge according to IEC 61000-4-5 | 1 kV |
| • due to high-frequency radiation according to IEC 61000-4-6 | 10 V |
| field-based interference according to IEC 61000-4-3 | 10 V/m |

| | |
|--|---|
| electrostatic discharge according to IEC 61000-4-2 | 4 kV contact discharge / 8 kV air discharge |
| conducted HF interference emissions according to CISPR11 | Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC |
| field-bound HF interference emission according to CISPR11 | Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC |
| Safety related data | |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe |
| Main circuit | |
| number of poles for main current circuit | 3 |
| design of the switching contact | Hybrid |
| design of the switching contact as NO contact for signaling function | OUT, electronic, 24 V DC, 15 mA |
| adjustable current response value current of the current-dependent overload release | 0.4 ... 2 A |
| minimum load [%] | 20 %; from set rated current |
| type of the motor protection | solid-state |
| operating voltage rated value | 48 ... 500 V |
| relative symmetrical tolerance of the operating voltage | 10 % |
| operating frequency 1 rated value | 50 Hz |
| operating frequency 2 rated value | 60 Hz |
| relative symmetrical tolerance of the operating frequency | 10 % |
| operational current | |
| • at AC at 400 V rated value | 2 A |
| • at AC-3 at 400 V rated value | 2 A |
| • at AC-53a at 400 V at ambient temperature 40 °C rated value | 2 A |
| ampacity when starting maximum | 16 A |
| operating power for 3-phase motors at 400 V at 50 Hz | 0.09 ... 0.75 kW |
| Inputs/ Outputs | |
| input voltage at digital input | |
| • at DC rated value | 110 V |
| • with signal <0> at DC | 0 ... 40 V |
| • for signal <1> at DC | 79 ... 121 |
| input voltage at digital input | |
| • at AC rated value | 110 V |
| • with signal <0> at AC | 0 ... 40 V |
| • for signal <1> at AC | 93 ... 253 V |
| input current at digital input | |
| • for signal <1> at DC | 1.5 mA |
| • with signal <0> at DC | 0.25 mA |
| input current at digital input with signal <0> at AC | |
| • at 110 V | 0.2 mA |
| • at 230 V | 0.4 mA |
| input current at digital input for signal <1> at AC | |
| • at 110 V | 1.1 mA |
| • at 230 V | 2.3 mA |
| number of CO contacts for auxiliary contacts | 1 |
| operational current of auxiliary contacts at AC-15 at 230 V maximum | 3 A |
| operational current of auxiliary contacts at DC-13 at 24 V maximum | 1 A |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 110 ... 230 V |
| • at 60 Hz rated value | 110 ... 230 V |
| relative negative tolerance of the control supply voltage at AC at 60 Hz | 15 % |

| | |
|---|--|
| relative positive tolerance of the control supply voltage at AC at 60 Hz | 10 % |
| control supply voltage 1 at AC | |
| • at 50 Hz | 110 ... 230 V |
| • at 60 Hz | 110 ... 230 V |
| control supply voltage frequency | |
| • 1 rated value | 50 Hz |
| • 2 rated value | 60 Hz |
| relative negative tolerance of the control supply voltage at DC | 15 % |
| relative positive tolerance of the control supply voltage at DC | 10 % |
| control supply voltage 1 at DC rated value | 110 V |
| operating range factor control supply voltage rated value at DC | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value at AC at 50 Hz | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value at AC at 60 Hz | |
| • initial value | 0.85 |
| • full-scale value | 1.1 |
| control current at AC | |
| • at 110 V in standby mode of operation | 16 mA |
| • at 230 V in standby mode of operation | 9 mA |
| • at 110 V when switching on | 55 mA |
| • at 230 V when switching on | 33 mA |
| • at 110 V during operation | 36 mA |
| • at 230 V during operation | 22 mA |
| control current at DC | |
| • in standby mode of operation | 6 mA |
| • when switching on | 15 mA |
| • during operation | 30 mA |
| inrush current peak | |
| • at AC at 110 V | 1 200 mA |
| • at AC at 230 V | 2 900 mA |
| duration of inrush current peak | |
| • at AC at 110 V | 1 ms |
| • at AC at 230 V | 1 ms |
| power loss [W] in auxiliary and control circuit | |
| • in switching state OFF | |
| — with bypass circuit | 2.1 W |
| • in switching state ON | |
| — with bypass circuit | 5.06 W |
| Response times | |
| ON-delay time | 60 ... 90 ms |
| OFF-delay time | 60 ... 90 ms |
| Power Electronics | |
| operational current | |
| • at 40 °C rated value | 2 A |
| • at 50 °C rated value | 2 A |
| • at 55 °C rated value | 2 A |
| • at 60 °C rated value | 2 A |
| Installation/ mounting/ dimensions | |
| mounting position | vertical, horizontal, standing (observe derating) |
| fastening method | screw and snap-on mounting onto 35 mm standard mounting rail |
| height | 100 mm |
| width | 22.5 mm |

| | |
|--|---|
| depth | 141.6 mm |
| required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 50 mm — downwards 50 mm — at the side 0 mm • for grounded parts <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 50 mm — at the side 3.5 mm — downwards 50 mm | |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 4 000 m; For derating see manual |
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation -25 ... +60 °C • during storage -40 ... +70 °C • during transport -40 ... +70 °C | |
| environmental category during operation according to IEC 60721 | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| relative humidity during operation | 10 ... 95 % |
| air pressure according to SN 31205 | 900 ... 1 060 hPa |
| Communication/ Protocol | |
| protocol is supported | |
| <ul style="list-style-type: none"> • PROFINET IO protocol No • PROFIsafe protocol No | |
| product function bus communication | No |
| protocol is supported AS-Interface protocol | No |
| Connections/ Terminals | |
| type of electrical connection | screw-type terminals for main circuit, screw-type terminals for control circuit |
| <ul style="list-style-type: none"> • for main current circuit screw-type terminals • for auxiliary and control circuit screw-type terminals | |
| wire length for motor unshielded maximum | 100 m |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid 1x (0,5 ... 4 mm²), 2x (0,5 ... 2,5 mm²) — finely stranded with core end processing 1x (0,5 ... 4 mm²), 2x (0,5 ... 1,5 mm²) • at AWG cables for main contacts 1x (20 ... 12), 2x (20 ... 14) | |
| connectable conductor cross-section for main contacts | |
| <ul style="list-style-type: none"> • solid or stranded 0.5 ... 4 mm² • finely stranded with core end processing 0.5 ... 4 mm² | |
| connectable conductor cross-section for auxiliary contacts | |
| <ul style="list-style-type: none"> • solid or stranded 0.5 ... 2.5 mm² • finely stranded with core end processing 0.5 ... 2.5 mm² | |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid 1x (0,5 ... 2,5 mm²), 2x (1,0 ... 1,5 mm²) — finely stranded with core end processing 1x (0,5 ... 2,5 mm²), 2x (0,5 ... 1 mm²) • at AWG cables for auxiliary contacts 1x (20 ... 14), 2x (18 ... 16) | |
| AWG number as coded connectable conductor cross section | |
| <ul style="list-style-type: none"> • for main contacts 20 ... 12 • for auxiliary contacts 20 ... 14 | |
| UL/CSA ratings | |
| yielded mechanical performance [hp] | |
| <ul style="list-style-type: none"> • for single-phase AC motor | |

- at 230 V rated value 0.125 hp
- for 3-phase AC motor
 - at 200/208 V rated value 0.333 hp
 - at 220/230 V rated value 0.333 hp
 - at 460/480 V rated value 0.75 hp

operating voltage at AC

- according to UL rated value 480 V
- according to CSA rated value 400 V

Certificates/ approvals

General Product Approval

EMC



[Confirmation](#)



Declaration of Conformity

Test Certificates

other

Railway



EG-Konf.

[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1002-1AA14>

Cax online generator





<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1002-1AA14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RM1002-1AA14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1002-1AA14&lang=en

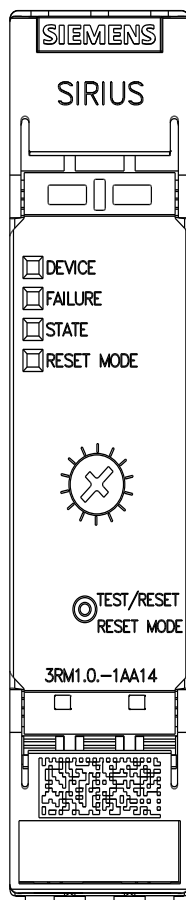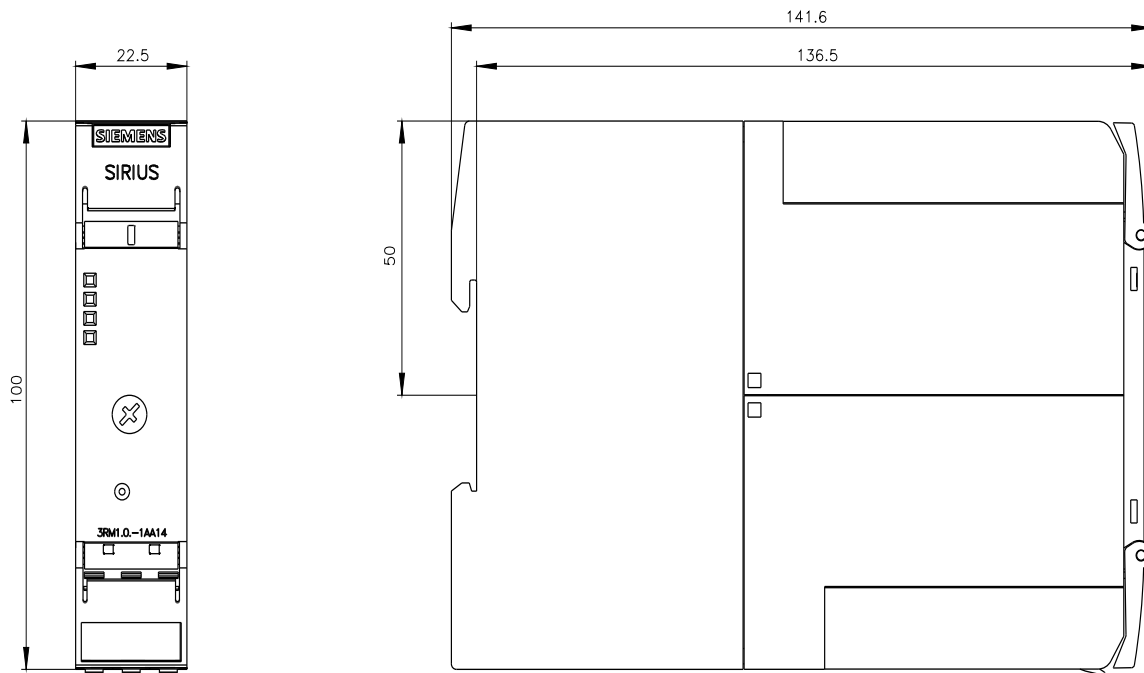

last modified:

6/21/2022