

Ratings

Voltage: 300 V
 Temperature: 105 °C
 Flammability: VW-1



Conductor

Conductor count: 2
 Gauge: 24 AWG 0.22 mm²
 Material: bare copper strands
 Strand size: Ø 0.16 mm x 11
 Maximum resistance at 20 °C: 87.5 ohms/km

Outer jacket

Material: XLPE, LSZH (low smoke zero halogen)
 Color: red and black
 Diameter: 2.8 ±0.20 mm (1.4 ±0.10 x 2)
 Nominal thickness: 0.37 mm
 Resistance at 20 °C: 100 MΩ /km min

Wire marking: E339579 UL AWM STYLE 4384 24 AWG 105°C
 300V VW-1 TENSILITY

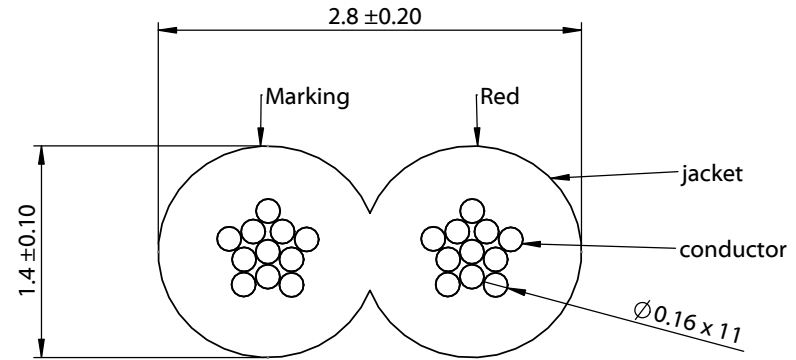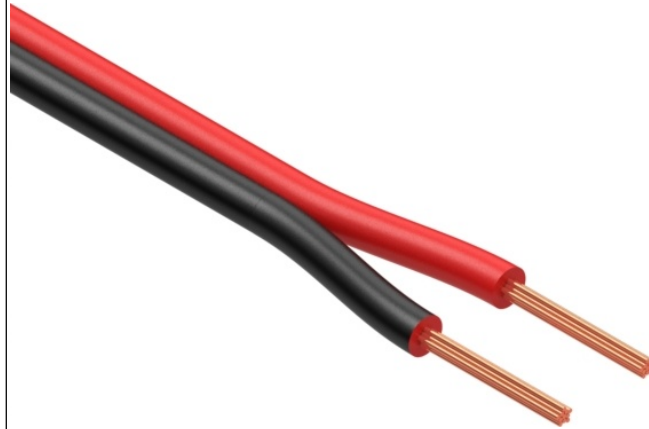

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	9/1/2022	Initial release	PB <small>Digitally signed by PB Date: 2022.09.05 08:24:56 -07'00'</small>	RoHS compliant	
			Verified:	Function test: no open, no short circuit, no intermittent	Size: Part number:
			JD <small>Digitally signed by JD Date: 2022.09.08 09:21:35 -07'00'</small>	Description:	A 30-02859
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Wire, 2C, 24 AWG, UL4384, 300V, 105C, 2.8 mm, VW-1, LSZH, XLPE, red and black	Scale: 20:1
					Sheet 1 of 1

5

4

3

2

1