

## Panel feed-through - ST-08P1N8ACK04S - 1617932

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel feed-through, straight, SPEEDCON locking, M17, Number of positions: 8, Type of contact: Male connector, Crimp connection, Flat gasket, 4x Ø3.2, shielded: yes, Flange dimensions: 25.75 mm x 25.75 mm, Cable diameter: 9 mm...11 mm

### Product Features

- Reduced size: ideal for compact devices
- Consistent EMC protection for reliable connection solutions in the industrial environment
- Crimping connection: vibration- and temperature-resistant assembly
- Flexible use: reliably connect various cable diameters
- User-specific, suitable for front and rear mounting



### Key Commercial Data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 pc     |
| Custom tariff number | 85366990 |
| Country of origin    | Germany  |

### Technical data

#### General

|  |   |
|--|---|
| Note   | Order information: Order crimp contacts Ø 1 mm separately |
| Type of locking                                    | SPEEDCON locking  |
| Direction of rotation of contact chamber numbering | Standard  |
| Coding   | N   |
| Contact connection method                          | Crimp connection  |
| Type of contacts                                   | Male connector  |
| Number of positions                                | 8   |
| Contact diameter of power contacts                 | 1 mm  |
| Nominal current per power contact at 25°C          | 3.6 A   |
| Conductor entry                                    | 9 mm ... 11 mm  |

## Panel feed-through - ST-08P1N8ACK04S - 1617932

### Technical data

#### General

|                             |         |
|-----------------------------|---------|
| Pg housing screw connection | none    |
| Mounting type               | 4x Ø3.2 |

#### Ambient conditions

|                      |                   |
|----------------------|-------------------|
| Ambient temperature  | -40 °C ... 125 °C |
| Degree of protection | IP67              |

#### Specifications according to DIN EN 61984:2001

|   |        |
|---|--------|
| Installation height max.                      | 3000 m |
| Nominal / operating voltage of power contacts | 60 V   |
| Rated surge voltage of power contacts         | 1.5 kV |
| Overvoltage category of power contacts        | II     |
| Degree of pollution of power contacts         | 3      |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27143423 |
| eCl@ss 6.0 | 27143423 |
| eCl@ss 7.0 | 27449001 |
| eCl@ss 8.0 | 27440103 |
| eCl@ss 9.0 | 27440102 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002635 |
| ETIM 5.0 | EC002061 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11     | 43172015 |
| UNSPSC 12.01  | 43201404 |
| UNSPSC 13.2   | 43201404 |

# Panel feed-through - ST-08P1N8ACK04S - 1617932

## Approvals

### Approvals

---

#### Approvals

cUL Recognized / UL Recognized / EAC / cULus Recognized

---


#### Ex Approvals

---

#### Approvals submitted


---

### Approval details

|   |      |
|---|------|
| cUL Recognized  |      |
| Nominal current IN  | 5 A  |
| Nominal voltage UN  | 60 V |

|                    |      |
|--------------------|------|
| UL Recognized      |      |
| Nominal current IN | 5 A  |
| Nominal voltage UN | 60 V |


|     |
|-----|
| EAC |
|-----|

|  |
|--|
| cULus Recognized  |
|--|

## Drawings


# Panel feed-through - ST-08P1N8ACK04S - 1617932

Schematic diagram




Connector pin assignment

Dimensional drawing

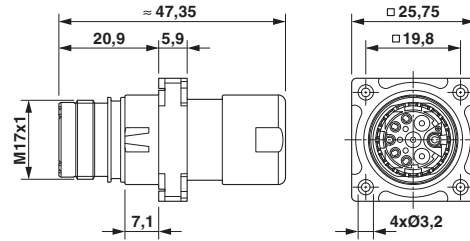

Schematic diagram



Installation dimensions