


## SPECIFICATION CONTROL DRAWING

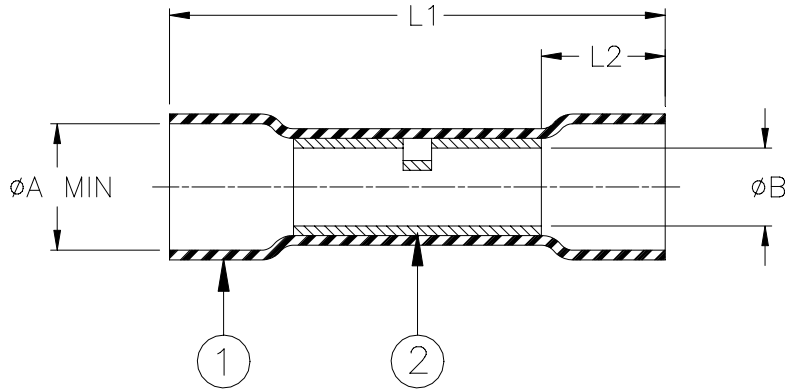

Product Revision		Color	Marking	Size Range mm <sup>2</sup> (AWG)	L1 ±1.5 (L1 ±0.06)	L2 min	øA*		øB min	Wire Strip Length Nom.
Product Name							(a)	(b)		
D-406-2007	C	Red	22 - 18 AWG	0.5 - 1.0 (22 - 18)	37.0 (1.50)	10.0 (0.39)	4.3 (0.170)	1.4 (0.055)	1.47 (0.058)	6 to 10 (1/4 to 3/8)
D-406-2008	C	Blue	16 - 14 AWG	1.5 - 2.5 (16 - 14)	37.0 (1.50)	10.0 (0.39)	5.0 (0.197)	2.0 (0.080)	2.33 (0.092)	6 to 10 (1/4 to 3/8)
D-406-2009	C	Yellow	12 - 10 AWG	3.0 - 6.0 (12 - 10)	43.0 (1.70)	10.0 (0.39)	6.5 (0.255)	2.8 (0.110)	3.50 (0.138)	10 to 13 (3/8 to 1/2)

### MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyamide (nylon) with a polyamide-based hot-melt adhesive liner. Color per table.
- CRIMP SPLICE: Tin-plated copper alloy.  
BASE METAL: C110 Copper.  
PLATING: Tin-plated per MIL-T-10727, Type 1.

### APPLICATION

- These parts may be used to obtain an environment-resistant one-to-one in-line (butt) splice in wires meeting the size range and diameter restraints specified herein and having a temperature rating of not less than 85°C.
- øA\* (a) Minimum diameter as received: Wire insulation diameter must be less than this value.  
(b) Maximum diameter after recovery: Wire insulation diameter must be larger than this value to obtain an environment resistant splice.
- Wires are to be stripped per table, inserted into opposite ends of the crimp barrel, crimped with a Tyco Electronics/Raychem AD-1522 tool (or equivalent). The sleeve must be heated along its whole length until the crimp marks are gone and the ends of the sleeve recover onto the wires.
- Spliced assemblies will meet the requirements of Raychem specification RB-107.
- The parts covered by this drawing are UL (US and CANADA) Listed, File #E87681.

<b>tyco</b> Electronics		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		<i>Raychem</i>		TITLE: <b>DURASEAL CRIMP SPLICE, ENVIRONMENT RESISTANT</b>					
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]						DOCUMENT NO.: <b>D-406-2007/-2008/-2009</b>					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		PROD. REV.: SEE TABLE		DOC. ISSUE: 2		DATE: 09-Nov-05	
PREPARED BY: Irodriguez		DCR NUMBER: D050474		REPLACES: D030202		CAGE CODE : 06090		SCALE: ---		SIZE: A	
										SHEET: 1 of 1	