


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS in. [mm]				
		L ± .02 [0,5]	W ± .01 [0,3]	C ± .015 [0,4]	M ± .02 [0,5]	H ± .01 [0,3]
PV12-6HDR	#6	1.05 [26,7]	.31 [7,9]	.35 [8,9]	.89 [22,6]	.15 [3,8]
PV12-8HDR	#8	1.05 [26,7]	.31 [7,9]	.35 [8,9]	.89 [22,6]	.17 [4,3]
PV12-10HDR	#10	1.08 [27,4]	.37 [9,4]	.33 [8,4]	.89 [22,6]	.20 [5,1]
PV12-14HDR	1/4"	1.23 [31,2]	.52 [13,2]	.42 [10,7]	.97 [24,6]	.27 [6,9]
PV12-56HDR	5/16"	1.23 [31,2]	.52 [13,2]	.42 [10,7]	.97 [24,6]	.34 [8,6]
PV12-38HDR	3/8"	1.31 [33,3]	.58 [14,7]	.46 [11,7]	1.02 [25,9]	.40 [10,2]

NOTES:

- USED FOR:
 - A. #16-12 AWG [2,0-6,0 mm²] STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600 V. MAX. VOLTAGE RATING
- INSTALLATION TOOLS:
 - A. UL APPROVED: CT-600A (CT-550CH), CT-1550, CT-1551, CT-2500 (CT-2550CH)
 - B. PANDUIT APPROVED: CT-460
- WIRE STRIP LENGTH: 9/32" ^{+1/32}/₀ [7,1^{+0,8}]
- MATERIAL:
 - A. STAMPING: .05" [1,3] THK COPPER, TIN PLATED
 - B. HOUSING: VINYL, YELLOW
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

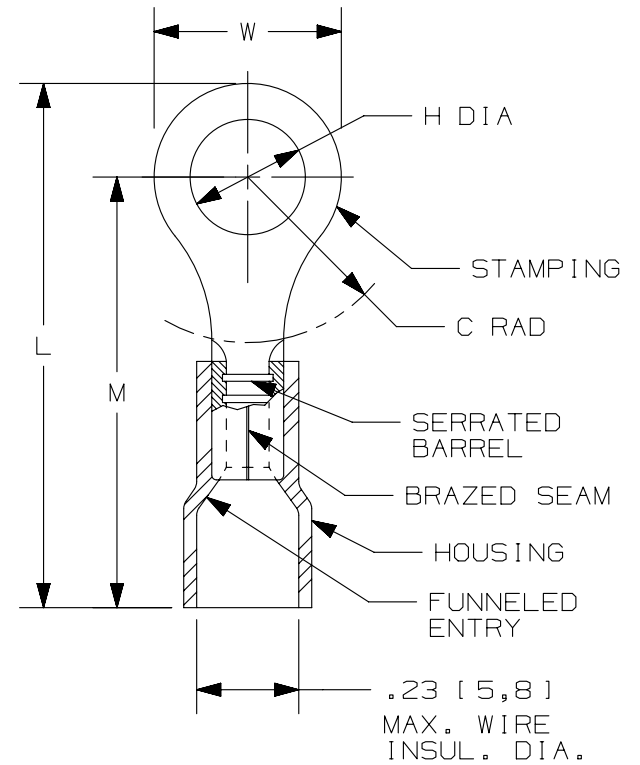

LISTED
587H
E52164



CERTIFIED
LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04	10.16.12	JBN	LCA	VMB	REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41281

TITLE RING TERMINALS, VINYL INSULATED, HEAVY DUTY #16-12 CUSTOMER DRAWING					
ITEM REVISION NAME N41281BA/04	PANDUIT				
DATASET FILE NAME N41281BA_DC/04A					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [0.13] .xx ± .01 [0.25] ANGLES ± 5°					
MATERIAL: SEE NOTES					
DRAWING NUMBER: A41281					
DRAWN BY DAW	DATE -	CHK -	SCALE N.T.S.	SHT 1 OF 1	SIZE A

D10100DA/15