

## Panel feed-through terminal block - RWO 10-TC/S - 3074965

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Panel feed-through terminal block, Connection method: Bolt connection, Load current : 309 A, Cross section: 6 mm<sup>2</sup> - 150 mm<sup>2</sup>, Connection direction of the conductor to plug-in direction: 0 °, Width: 42.2 mm, Color: gray

### Product Features

- Easy grouping with engagement pin versions
- Both terminal halves can be easily assembled by simply snapping them together
- Spring-loaded spacers protect the bolt connection against loosening
- Touch-proof insulating housing with transparent cover
- Automatic compensation of the panel thickness via the snap principle integrated in the insulation housing



### Key commercial data

Packing unit	1 1
Minimum order quantity	5 1
Weight per Piece (excluding packing)	368.0 GRM
Custom tariff number	85369010
Country of origin	China

### Technical data

#### General

Number of levels	1
Number of connections	2
Color	gray
Insulating material	PA
Inflammability class according to UL 94	V0
Rated surge voltage	6 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I

## Panel feed-through terminal block - RWO 10-TC/S - 3074965

### Technical data

#### General

Connection in acc. with standard	IEC 60947-7-1
Nominal current I <sub>N</sub>	309 A
Nominal voltage U <sub>N</sub>	1000 V
Open side panel	nein
Number of positions	1

#### Dimensions

Width	42.2 mm
-------	---------

#### Connection data

Connection side	Level 1 above 1 below 1
Connection method	Bolt connection
Conductor cross section solid min.	6 mm <sup>2</sup>
Conductor cross section solid max.	150 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	10
Conductor cross section AWG/kcmil max	250 kcmil
Screw thread	M10
Tightening torque, min	10 Nm
Tightening torque max	20 Nm

### Classifications

#### eCl@ss

eCl@ss 4.0	27141111
eCl@ss 4.1	27141111
eCl@ss 5.0	27141134
eCl@ss 5.1	27141134
eCl@ss 6.0	27141134
eCl@ss 7.0	27141134
eCl@ss 8.0	27141134

#### ETIM

ETIM 3.0	EC001283
ETIM 4.0	EC001283
ETIM 5.0	EC001283

#### UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410

# Panel feed-through terminal block - RWO 10-TC/S - 3074965

## Classifications

### UNSPSC

UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

## Approvals

### Approvals

#### Approvals

GOST / UL Recognized / GOST

#### Ex Approvals

#### Approvals submitted

## Approval details

GOST

UL Recognized

	B	C
Nominal current IN	309 A	309 A
Nominal voltage UN	600 V	600 V

GOST

## Accessories

### Accessories

End cover

## Panel feed-through terminal block - RWO 10-TC/S - 3074965

### Accessories

Flange cover - RW 10-F - 3075197



Flange cover

### Terminal marking

Marker for terminal blocks - TMT (EX9,5)R - 0828295



Marker for terminal blocks, Roll, white, Unlabeled, Can be labeled with: THERMOMARK ROLL, THERMOMARK X, THERMOMARK S1.1, Mounting type: Snap into universal marker groove, Snap into flat marker groove, Lettering field: 9.5 x 50000 mm


Zack marker strip - ZB 16,3:UNPRINTED - 0820222



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 16.3 mm, Lettering field: 10.5 x 16.25 mm

### Drawings

Dimensioned drawing

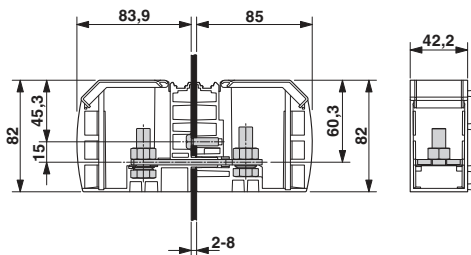

Dimensioned drawing

