

6

5


4

3



2

1

MATERIAL NUMBER	ENGINEERING NUMBER	LENGTH
130039-0127	DND40-M010	1.0M +55.6mm -0 [3.28FT +2.19IN -0]



FEMALE FACE VIEW

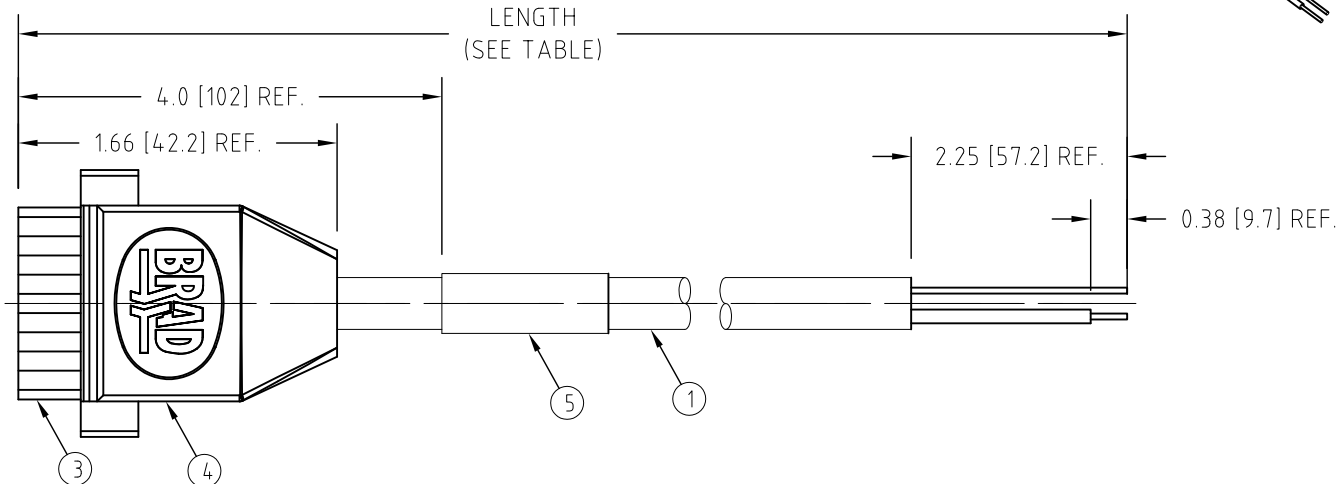

NOTES:

- 1) MATERIALS:  
SEE TABLE
- 2) FINISHES:  
SEE TABLE
- 3) ELECTRICAL DATA:  
MAX. VOLTAGE: 300 VAC  
MAX. CURRENT: 10 AMPS
- 4) ENVIRONMENTAL:  
PROTECTION IP20  
TEMPERATURE RANGE: -20°C TO 80°C
- 5) CERTIFICATIONS:  
cCSAus FILE: LR6837
- 6) ASSEMBLY IS RoHS COMPLIANT.

WIRING DIAGRAM

FEMALE

1	DRAIN
2	RED
3	BLACK
4	WHITE
5	BLUE

S	QTY.	DESCRIPTION	MATERIAL	FINISH
5	1	LABEL	PLASTIC FILM	YELLOW
4	1	OVERMOLD	TPE	GRAY
3	1	D-NET OPEN CONNECTOR	POLYAMIDE	GRAY
2	5	SOCKET CONTACT	COPPER ALLOY	GOLD PLATING
1	1	#22/4 CABLE + DRAIN	PVC JACKET	GRAY

RELEASE SALES DRAWING  
EC NO: WNA2010-0437  
DRWN: LHARTMAN 2010/01/22  
CHKD: BWOODMAN  
APPR: JFMURPHY 2010/01/23

QUALITY SYMBOLS  
▽=0  
▽C=0

DESCRIPTION  
REV  
A

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±0.13	±.010
1 PLACE	±0.25	±.020
ANGULAR ±1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
LHARTMAN	2010/01/22
CHECKED BY	DATE
BWOODMAN	2010/01/27
APPROVED BY	DATE
---	---
MATERIAL NO.	
SEE TABLE	
SIZE	A

SCALE	1:1	DESIGN UNITS	INCH	THIRD ANGLE PROJECTION
TITLE				
DEVICE-NET OPEN W/SCREWS 5P FEMALE OPEN #22/4 + DRAIN PVC CABLE				
MATERIAL NO.			DOCUMENT NO.	
SEE TABLE			SD-130039-031	
SHEET NO.				1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A