

## 40A, 35V - 200V Schottky Barrier Rectifier

### FEATURES

- AEC-Q101 qualified available
- Low power loss, high efficiency
- Guard ring for overvoltage protection
- High surge current capability
- UL Recognized File # E-326243
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21


### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Monitor
- DC to DC converters
- TV


### MECHANICAL DATA

- Case: TO-247AD (TO-3P)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Mounting torque: 1.13 N·m maximum
- Polarity: As marked
- Weight: 6.10g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	40	A
$V_{RRM}$	35 - 200	V
$I_{FSM}$	330	A
$T_{JMAX}$	150	°C
Package	TO-247AD (TO-3P)	
Configuration	Dual dies	

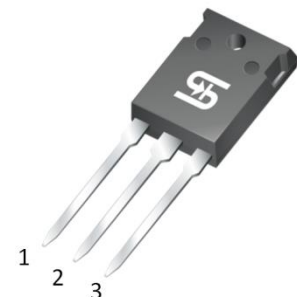

TO-247AD (TO-3P)

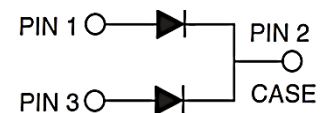

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	MBR 4035 PT	MBR 4045 PT	MBR 4050 PT	MBR 4060 PT	MBR 4090 PT	MBR 40100 PT	MBR 40150 PT	MBR 40200 PT	UNIT
Marking code on the device		MBR 4035 PT	MBR 4045 PT	MBR 4050 PT	MBR 4060 PT	MBR 4090 PT	MBR 40100 PT	MBR 40150 PT	MBR 40200 PT	
Repetitive peak reverse voltage	$V_{RRM}$	35	45	50	60	90	100	150	200	V
Reverse voltage, total rms value	$V_{R(RMS)}$	24	31	35	42	63	70	105	140	V
Forward current	$I_F$	40								A
Surge peak forward current 8.3ms single half sine wave superimposed on rated load	$I_{FSM}$	330								A
Peak repetitive reverse surge current <sup>(1)</sup>	$I_{RRM}$	2			1					A
Peak repetitive forward current (Rated $V_R$ , Square wave, 20KHz)	$I_{FRM}$	40								A

#### Notes:

1.  $t_p = 2.0\mu\text{s}$ , 1.0KHz

<b>ABSOLUTE MAXIMUM RATINGS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	MBR 4035 PT	MBR 4045 PT	MBR 4050 PT	MBR 4060 PT	MBR 4090 PT	MBR 40100 PT	MBR 40150 PT	MBR 40200 PT	UNIT
Critical rate of rise of off-state voltage	dV/dt	10,000								V/ $\mu\text{s}$
Junction temperature	$T_J$	-55 to +150								$^\circ\text{C}$
Storage temperature	$T_{\text{STG}}$	-55 to +150								$^\circ\text{C}$

<b>THERMAL PERFORMANCE</b>			
PARAMETER	SYMBOL	TYP	UNIT
Junction-to-case thermal resistance	$R_{\theta\text{JC}}$	1.2	$^\circ\text{C/W}$

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode <sup>(1)</sup>	MBR4035PT MBR4045PT	$I_F = 20\text{A}, T_J = 25^\circ\text{C}$	$V_F$	-	0.75	V
	MBR4050PT MBR4060PT			-	0.77	V
	MBR4090PT MBR40100PT			-	0.84	V
	MBR40150PT MBR40200PT			-	0.90	V
	MBR4035PT MBR4045PT	$I_F = 40\text{A}, T_J = 25^\circ\text{C}$		-	0.80	V
	MBR4050PT MBR4060PT			-	-	V
	MBR4090PT MBR40100PT			-	-	V
	MBR40150PT MBR40200PT			-	1.01	V
	MBR4035PT MBR4045PT	$I_F = 20\text{A}, T_J = 125^\circ\text{C}$		-	0.65	V
	MBR4050PT MBR4060PT			-	0.67	V
	MBR4090PT MBR40100PT			-	0.74	V
	MBR40150PT MBR40200PT			-	0.80	V
	MBR4035PT MBR4045PT	$I_F = 40\text{A}, T_J = 125^\circ\text{C}$		-	0.75	V
	MBR4050PT MBR4060PT			-	-	V
	MBR4090PT MBR40100PT			-	-	V
	MBR40150PT MBR40200PT			-	-	V

**Notes:**

1. Pulse test with PW = 0.3ms

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
<b>PARAMETER</b>		<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	MBR4035PT MBR4045PT MBR4050PT MBR4060PT	$T_J = 25^\circ\text{C}$	$I_R$	-	1000	$\mu\text{A}$
	MBR4090PT MBR40100PT			-	500	$\mu\text{A}$
	MBR40150PT MBR40200PT			-	100	$\mu\text{A}$
	MBR4035PT MBR4045PT	$T_J = 125^\circ\text{C}$		-	30	$\text{mA}$
	MBR4050PT MBR4060PT			-	20	$\text{mA}$
	MBR4090PT MBR40100PT MBR40150PT MBR40200PT			-	10	$\text{mA}$

**Notes:**

- Pulse test with  $PW = 30\text{ms}$

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b> <sup>(1)(2)</sup>	<b>PACKAGE</b>	<b>PACKING</b>
MBR40xPT	TO-247AD (TO-3P)	30 / Tube
MBR40xPTH	TO-247AD (TO-3P)	30 / Tube


**Notes:**

- "x" defines voltage from 35V(MBR4035PT) to 200V(MBR40200PT)
- "H" means AEC-Q101 qualified


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

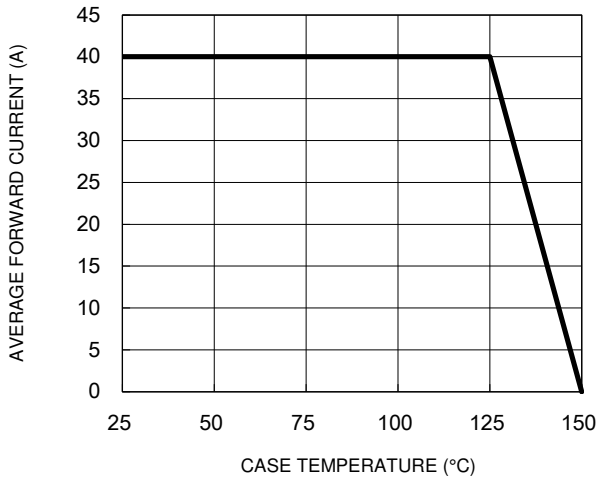


**Fig.2 Typical Junction Capacitance**

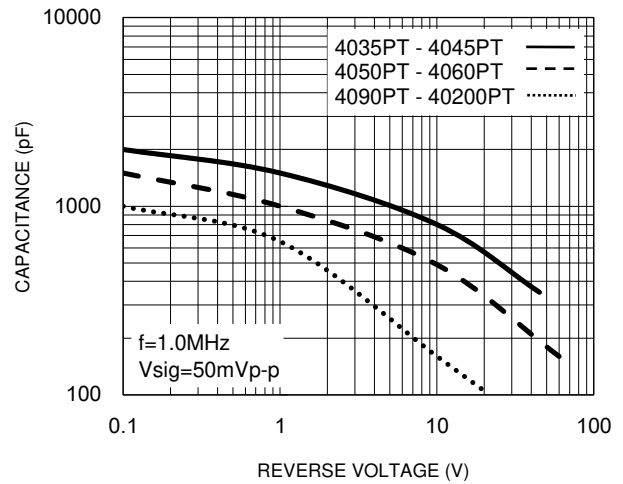


**Fig.3 Typical Reverse Characteristics**

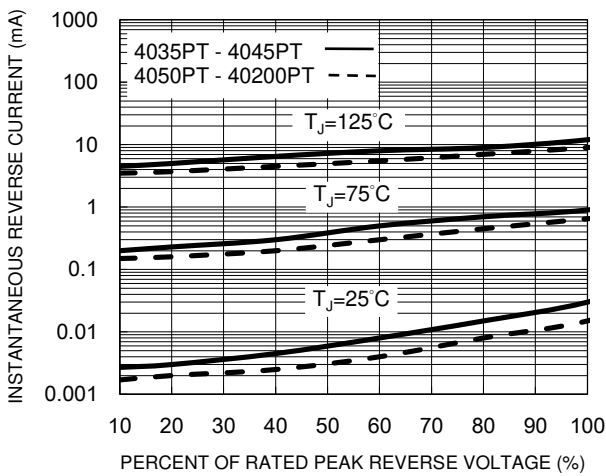

**Fig.4 Typical Forward Characteristics**

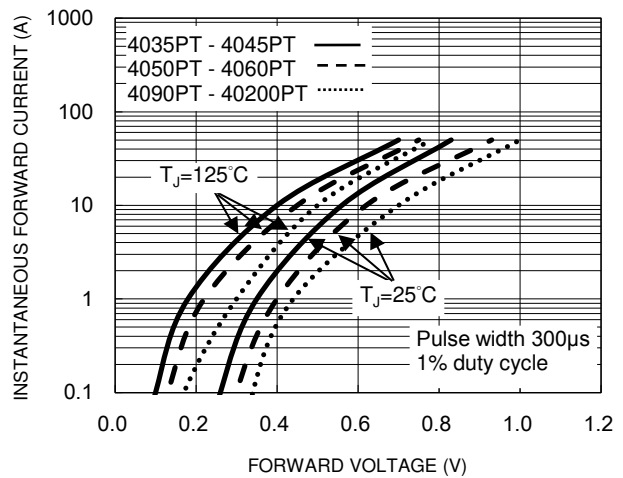


**Fig.5 Maximum Non-Repetitive Forward Surge Current**

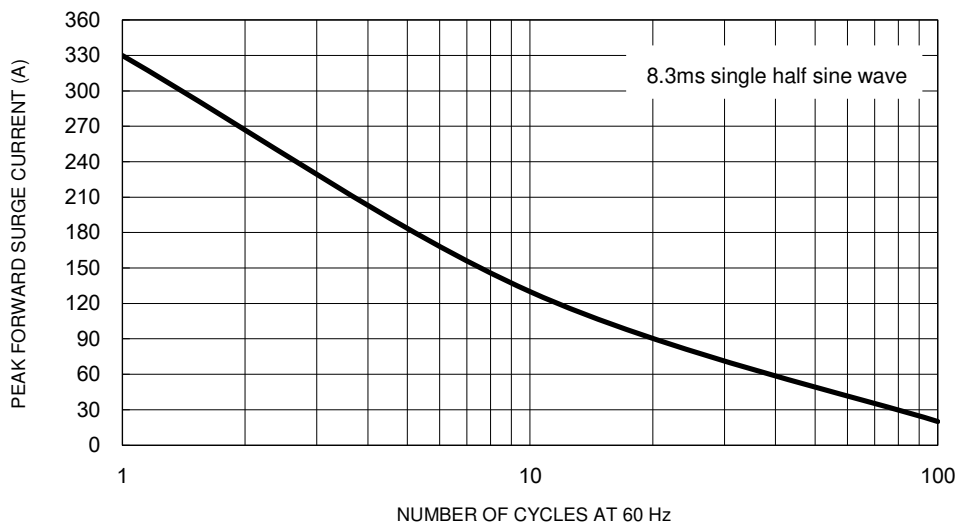


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.6 Typical Transient Thermal Impedance**

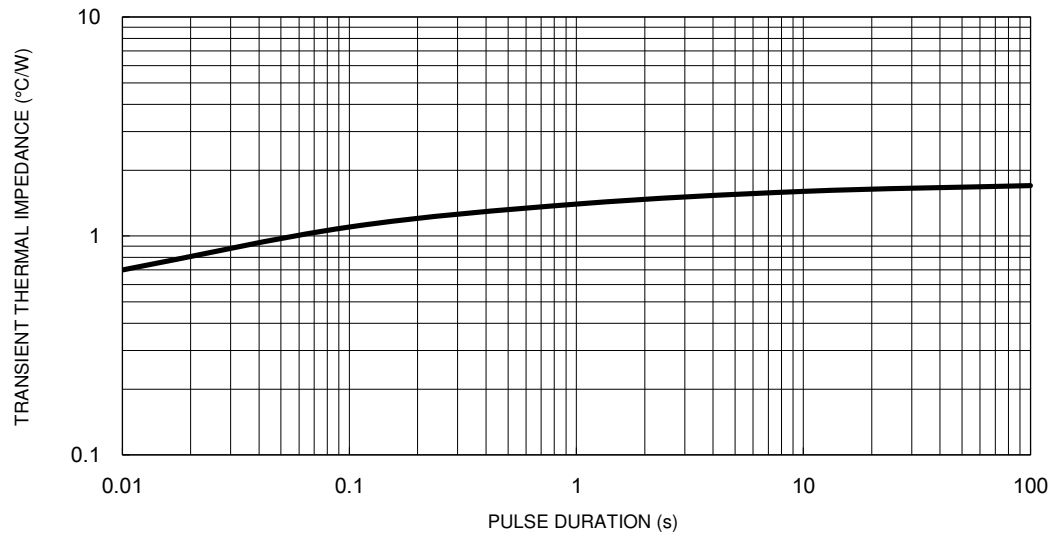

**PACKAGE OUTLINE DIMENSIONS**

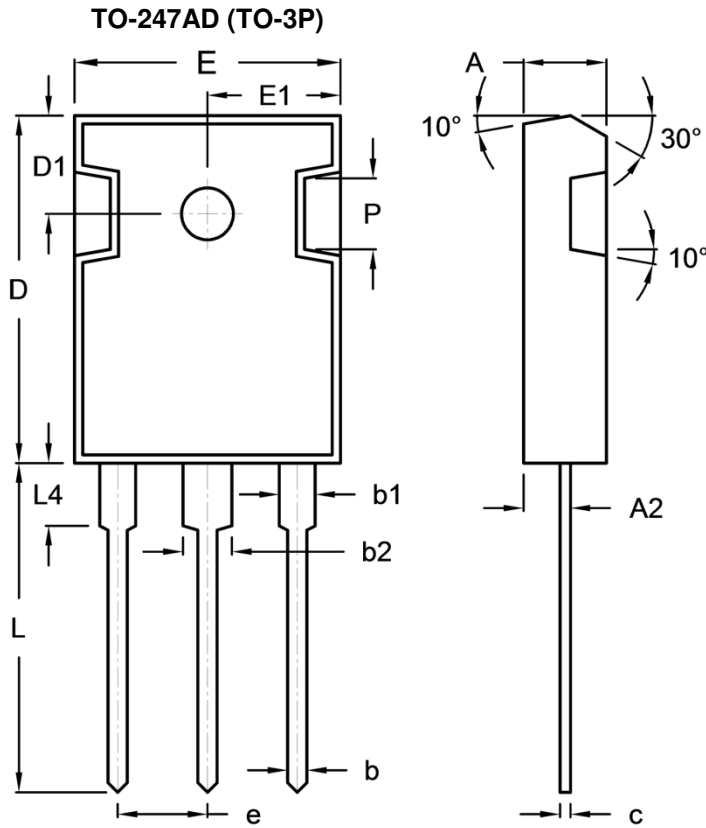

DIM	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.90	5.16	0.193	0.203
A2	2.70	3.00	0.106	0.118
b	1.12	1.22	0.044	0.048
b1	1.93	2.18	0.076	0.086
b2	2.97	3.22	0.117	0.127
c	0.51	0.76	0.020	0.030
D	20.80	21.30	0.819	0.839
D1	5.70	6.20	0.224	0.244
E	15.90	16.40	0.626	0.646
E1	7.90	8.20	0.311	0.323
e	5.20	5.70	0.205	0.224
H	2.90	3.40	0.114	0.134
L	19.70	20.20	0.776	0.795
L4	3.50	4.10	0.138	0.161
P	-	4.30	-	0.169

**MARKING DIAGRAM**



- P/N = Marking Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code

## **Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.