


# Specification Control Drawing


## Raychem

a) Part as supplied.

202K1\*\*-\*-11

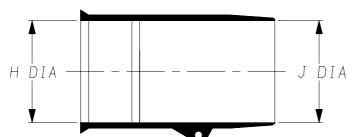

b) Part after unrestricted recovery.

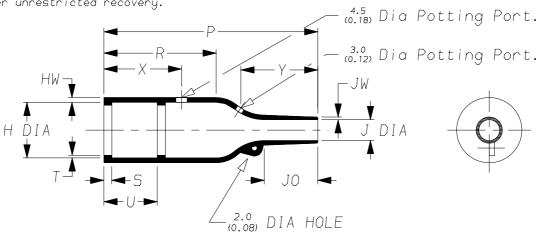

DIMENSIONS	in millimetres {in inches,for reference}													
Part No.	Min a	H Max b	Min a	J Max b	P ±10% b	R ±10% b	S ±10% b	T ±10% b	U ±10% b	J0 ±10% b	HW ±20% b	JW ±20% b	X ±20% b	Y ±20% b
202K121-*-11	24 {0.94}	10.4	24 {0.94}	5.6 {0.22}	26 {1.02}	9 {0.35}	3.0 {0.12}	1.0 {0.04}	1)	8.5 {0.33}	1.6 {0.06}	0.5 {0.02}	12 (0.47)	13 (0.51)
202K132-*-11	30 {1.18}	14.2 {0.56}	30 {1.18}	5.9 {0.23}	43 {1.69}	20 {0.79}	3.0 {0.12}	1.0 {0.04}	1	11.5 {0.45}	1.8 {0.07}	1.0 {0.04}	12 (0.47)	18 (0.71)
202K142-*-11	31 {1.22}	18.0 {0.71}	31 {1.22}	7.1 {0.28}	47 {1.85}	15 {0.59}	3.0 {0.12}	1.0 {0.04}	1	17.0 {0.67}	1.8 {0.07}	1.0 {0.04}	12 (0.47)	25 (0.98)
202K153-*-11	36 {1.42}	22.4 {0.88}	36 {1.42}	8.4 {0.33}	60 {2.36}	22 {0.87}	3.0 {0.12}	1.0 {0.04}	1	19.5 {0.77}	2.0 {0.08}	1.0 {0.04}	12 (0.47)	30 (1.18)
202K163-*-11	42 {1.65}	28.2 {1.11}	42 {1.65}	9.9 {0.39}	79 {3.11}	41 {1.61	3.0 {0.12}	1.7 {0.07}	20 {0.79}	21.0 {0.83}	2.2 {0.09}	1.0 {0.04}	32 (1.26)	30 (1.18)
202K174-*-11	60 {2.36}	35.1 {1.38}	60 {2.36}	15.7 {0.62}	110 {4.33}	52 {2.05}	3.0 {0.12}	1.7 {0.07}	20 {0.79}	39.0 {1.54}	3.2 {0.13}	1.5 {0.06}	32 (1.26)	50 (1.97)
202K185-*-11	66 {2.60}	44.5 {1.75}	66 {2.60}	16.8 {0.66}	150 {5.91}	70 {2.76}	3.0 {0.12}	2.0 {0.08}	20 {0.79}	51.5 {2.03}	3.8 {0.15}	2.0 {0.08}	32 (1.26)	70 (2.76)

This is a trimmed variant with Potting Ports
Modified dimensions are shown thus:- #

Copyright (!)

The copyright in this drawing is the property of Tyco Electronics UK Ltd. The drawing is issued on the condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Tyco Electronics UK Ltd.

Drawn A.LILLEY. Checked Issue 2 Date September 2006 Conforms to ISO Recommendations 3rd Angle Projection

Approval Design

sign MKTG.


Q.A.

202k1XX-11

Not to Scale

R	aychem	Specific Control	ation Drawing	Part Number 202K1**-*-11 Issue 2
Iss.	Date	E.C.R. No.	Detail	s of Change
2	September 2006	****	Title was	202K121 thru 185-*-11

### (Ordering Information)

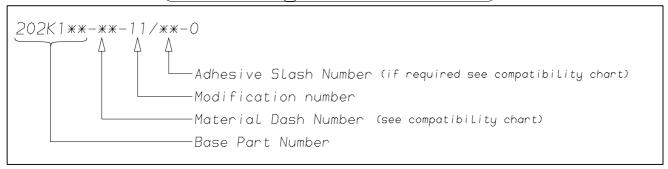

#### COMPATIBILITY CHART

Material Dash Number	Material Description	SPEC Number	Coating Slash Number
-3	POLYOLEFIN, SEMI-RIGID	RT-301, RK-6703	/42, /86, /180
-4	POLYOLEFIN, FLEXIBLE	RT-1304, RK-6704	/42 ,/86
-6	SILICON	RT-602, RK-6706	N/A
-25	ELASTOMER, FLUID RESISTANT	RT-1325, RK-6713	/42, /86, /225
-130	POLYOLEFIN, COMMERCIAL FLEXIBLE	RW-2008	/42

#### NOTES

- (1) Dimension U does not apply on sizes 202K121 thru 202K153.
- (2) 202K121-\*-11-0 Potting Port X is at 90° to Potting Port Y.
- $\bigcirc$  If eyelet clip (000W212) is required with part then add CS-1858 to description (i.e. 202K132-3-11-CS-1858-0).
- 4 As supplied dimensions are for uncoated parts, when coating is added entry diameters will reduce by 1.5mm Max.

England	Tyco Electronics Corporation 300, Constitution Drive, Menlo Park, CA 94025 USA Telephone (650) 361-3860 Fax: (650) 361-5579
Cage Code K1010	Cage Code 06090