


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00010	Connector, dc plug, 5.5x2.1xBL7.5xL30 locking style, brass nickel plated, threaded nut 5/16-32	2	
2	30-00004	Wire, 1C BC, 18 AWG, UL1185, 300V, 80C, 3.4 mm, shielded, VW-1, PVC, 79A	1	
3	24-00017	Overmold, PVC	2	

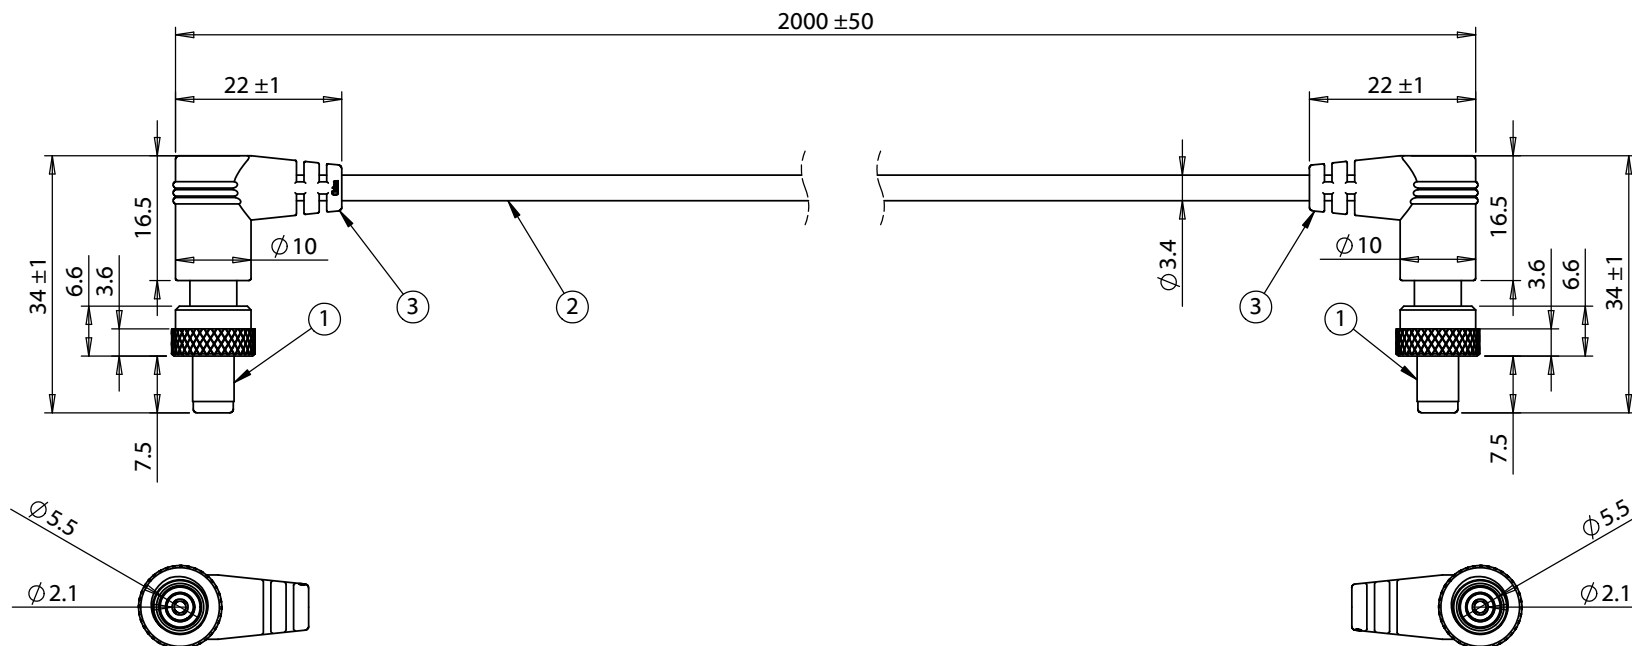

**Notes:**

Electical requirement: 5 A, 12 Vdc

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram		
50-00010	wire color	50-00010
center	white	center
sleeve	shield	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/28/2009	Initial release	GL 2016.09.08 15:46:22 -07'00'		
A1	2/6/2012	Updated connector description	Verified:	Function test: no open, no short circuit, no intermittent	Description: Cable, 2000 mm, 5.5x2.1x7.5mm 90° 50-00010 locking dc plug to same, 18 AWG, UL1185, 30-00004 wire
A2	7/30/2012	Included wire part number	PS <small>Digitally signed by PS Date: 2016.09.08 17:14:56 -07'00'</small>		
A3	8/29/2016	Modified overmold & connector overall length	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Scale: 1:1	Part number: A 10-00114
					Sheet 1 of 1