

Ratings

Voltage: 30 V
 Temperature: -10° to 80° C
 Flammability: VW-1, FT1

Conductor

Conductor count: 4 (1 twisted pair, 2 single conductors)
 Gauge: 28 AWG (1P), 26 AWG (2C)
 Material: tinned copper strands
 Strand size: $\phi 0.13 \times 7$ (1P), $\phi 0.16 \times 7$ (2C)
 Max resistance at 20 °C: 239 Ω /km (1P), 150 Ω /km (2C)

Insulator

Material: HD-PE (1P), SR-PVC/35P (2C)
 Color: white, green (1P), black, red (2C)
 Diameter: $\phi 0.85 \pm 0.10$ mm (1P), $\phi 1 \pm 0.10$ mm (2C)
 Nominal thickness: 0.22 mm (1P), 0.24 mm (2C)
 Resistance at 20 °C: 100 M Ω /km (1P), 10 M Ω /km (2C)

Shield

Type: foil + braided
 Material: aluminum mylar, tinned copper strands
 Stranding: 16/5/ $\phi 0.10$ mm
 Coverage: 100% (foil), 65% minimum (braid)

Drain

Material: tinned copper strands
 Stranding: $\phi 0.16 \times 7$



Outer jacket

Material: PVC/79A
 Color: white
 Diameter: $\phi 4.3 \pm 0.20$ mm
 Nominal thickness: 0.90 mm

Wire marking: E339579 UL AWM STYLE 2725
 28AWG/1P+26AWG/2C 80°C 30V VW-1 - - - cUL AWM
 28AWG/1P+26AWG/2C I/II A 80°C 300V FT1 HIGH SPEED
 USB 2.0 TENSILITY

Tests

Jacket tensile strength: 1.05 kgf/mm²
 HD-PE Insulator tensile strength: 1.69 kgf/mm²
 SR-PVC Insulator tensile strength: 2.11 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum jacket tensile strength 70 % original
 Minimum jacket elongation 65 % original
 Minimum HD-PE insulator tensile strength 75 % original
 Minimum HD-PE insulator elongation 75 % original
 Minimum SR-PVC insulator tensile strength 70 % original
 Minimum SR-PVC insulator elongation 70 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /4 hour, no observed cracking
 Dielectric test: 1500 Vac for 1 minute without breakdown

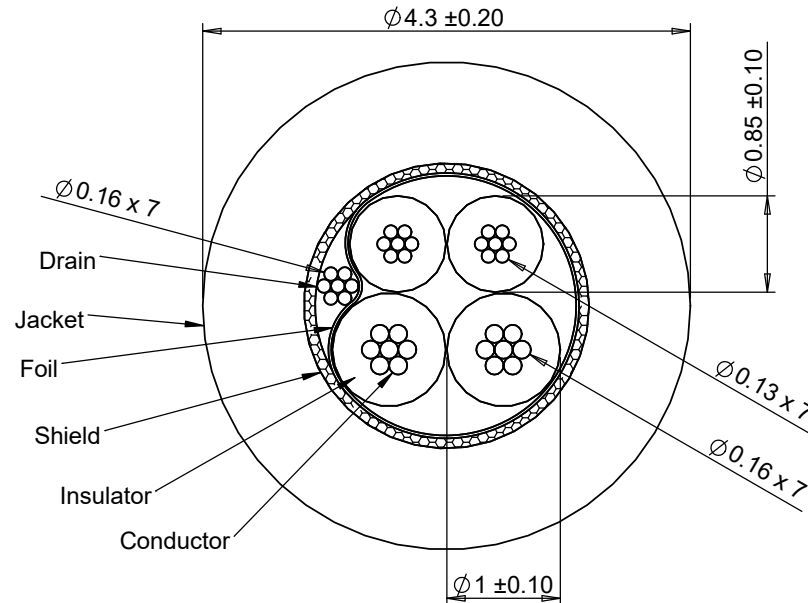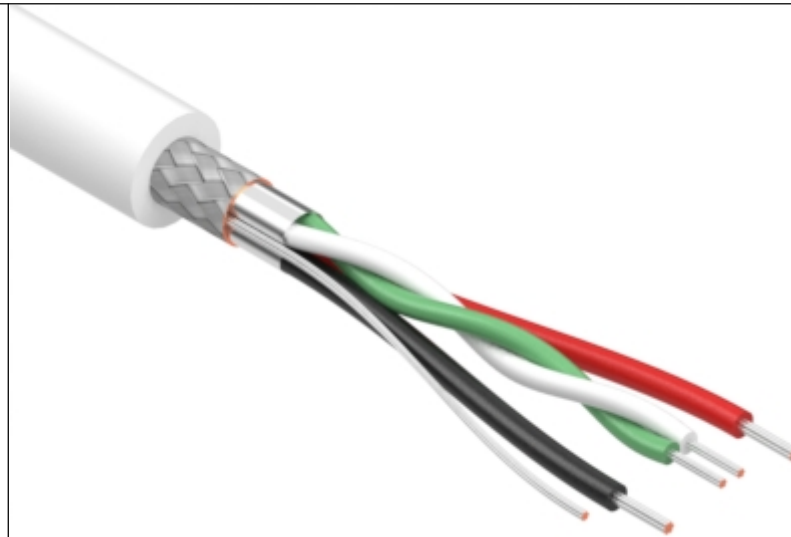

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/22/2016	Initial release	DN <small>Digitally signed by DN Date: 2017.01.06 13:55:13 -08'00'</small>	RoHS and REACH compliant	
			Verified: GL <small>Digitally signed by GL Date: 2017.01.10 09:18:29 -08'00'</small>	Function test: no open, no short circuit, no intermittent	Size: Part number: A 30-00873
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 4C, 1PR 28 AWG, 2C 26 AWG, UL2725, 30V, 80C, 4.3 mm, shielded, VW-1, PVC, 79A, USB 2.0, white	
					Sheet 1 of 1