



Contactor, 45DP,40A,1P,Open,240 Contactor, 45DP,40A,1P,Open,240

| | |
|---|--|
| product brand name | Class 45 DP Contactors |
| design of the product | Non-reversing Definite Purpose Contactor |
| special product feature | Enclosed body and coil with standard cover |
| General technical data | |
| weight [lb] | 0.58 lb |
| Height x Width x Depth [in] | 3.19 × 1.97 × 2.46 in |
| touch protection against electrical shock | Not finger-safe |
| ambient temperature [°F] | |
| • during storage | 158 °F |
| • during operation | 158 ... 158 °F |
| ambient temperature | |
| • during storage | 75 °C |
| • during operation | 70 ... 70 °C |
| country of origin | China |
| number of poles for main current circuit | 1 |
| Contactors | |
| size of contactor | 40A |
| number of NO contacts for main contacts | 1 |
| operating voltage for main current circuit at AC at 60 Hz maximum | 600 V |
| mechanical service life (operating cycles) of the main contacts typical | 250000 |
| Auxiliary contact | |
| number of NC contacts for auxiliary contacts | 0 |
| number of NO contacts for auxiliary contacts | 0 |
| number of NC contacts at contactor for auxiliary contacts | 0 |
| number of NO contacts at contactor for auxiliary contacts | 0 |
| number of total auxiliary contacts maximum | 0 |
| Coil | |
| control supply voltage | |
| • at AC at 50 Hz rated value | 190 ... 220 V |
| • at AC at 60 Hz rated value | 208 ... 240 V |
| Enclosure | |
| degree of protection NEMA rating of the enclosure | Open device (no enclosure) |
| Mounting/wiring | |
| mounting position | vertical |
| fastening method | Surface mounting and installation |
| type of electrical connection for supply voltage line-side | Box lug |
| tightening torque [lbf-in] for supply | 25 ... 25 lbf-in |
| type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded | 4 AWG |

| | |
|--|--------------------------------------|
| type of electrical connection for load-side outgoing feeder | Box lug |
| type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded | 4 AWG |
| type of electrical connection of magnet coil | Quick connects |
| type of electrical connection at contactor for auxiliary contacts | Screw-type terminals |
| Certificates/ approvals | |
| certificate of suitability | cRUus, ARI 780 & 790, UL File E14900 |
| Further information | |

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mfb=US2:45GG10AGA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/US/en/ps/US2:45GG10AGA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=US2:45GG10AGA&lang=en

Certificates/approvals

<https://support.industry.siemens.com/cs/US/en/ps/US2:45GG10AGA/certificate>

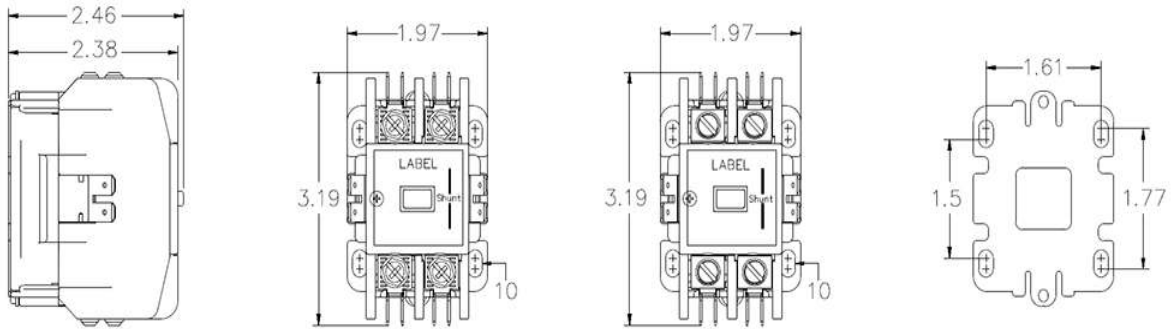

last modified:

5/25/2021