

NOTES:

- ① MAT'L: COPPER (STOCK TKN. $\frac{.031}{.79}$)
- ② PLATING: ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS FUNNEL FERRULE
- ④ NYLON INSULATION (COLOR CODED BLUE)

STUD SIZES: ($\pm .005$)


- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING # E32244
 "CSA" LISTING # 18689

WIRE SIZE: 16 - 14 AWG
 WIRE SIZE: 1.0 - 2.5 MM²

ALL DIMENSIONS = INCHES

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

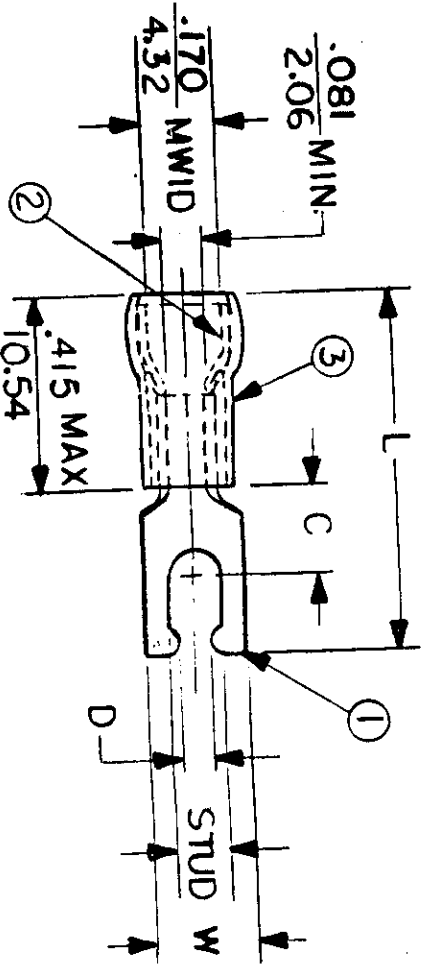

FILE NO.

BB-CD-805 -01

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"D" ±.005	AVAILABLE STUD SIZES	DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE:	NTS	DATE	TITLE:	DWG. NO.	CUSTOMER DWG
						FRAC.	DEC.							
BB-8193-	.260	.235	.885	.111	06						11-9-84	SNAP SPADE TONGUE TERMINAL	A	
BB-8194-	.290	.235	.895	.137	08						11-14-84	AVIKRIMP 800-SERIES		
BB-8195-	.328	.235	.945	.163	10									
	8.33	5.97	24.00	4.14										

