



# STLV3243EB

± 15 kV ESD protected 2.3 to 5.5 V, 400 kbps, RS-232 transceiver with auto-power-down

## Features

- ESD protection for RS-232 I/O pins:
  - ± 8 kV IEC 1000-4-2 contact discharge
  - ± 15 kV human body model
- 1 mA supply current achieved when in auto-power-down
- 250 kbps minimum guaranteed data rate
- Guaranteed 6 V/ms slew rate range
- Guaranteed mouse drive ability
- 0.1 µF external capacitors
- Meet EIA/TIA-562 specifications
- Available in Flip-Chip28 package

## Description

The STLV3243EB device consists of 3 drivers, 5 receivers and a dual charge-pump circuit. All transmitter outputs and receiver inputs are protected up to ±8 kV USING IEC 1000-4-2 contact discharge and ±15 kV using the human body model. The receiver R2 is always active to implement a wake-up feature for serial port. The device is guaranteed to run at data rates of 250 kbps while maintaining RS-562 output levels.

The auto-power-down feature operates when FORCEON is low and FORCEOFF is high. During this operation mode, if the device does not sense a valid RS-562 signal, the driver outputs are disabled. If FORCEOFF is set low, both drivers and receivers (except R2B) are shut off, and supply current is reduced to 1 µA. Disconnecting the serial port or turning off the peripheral drives causes the auto-power-down condition to occur.

Auto-power-down can be disabled when FORCEON and FORCEOFF are high, and this should be done when driving a serial mouse. With

**Table 1. Device summary**

Order code	Temperature range	Package	Packaging
STLV3243EBJR	- 40 to 85 °C	Flip-Chip28 (6x5 mm)	2500 parts per reel



auto-power-down enabled, the device is automatically activated when a valid signal is applied to any receiver input.

Typical applications are notebooks, PDAs, smart-phones, hand-held equipment, palmtop computers, peripherals, battery-powered equipment, and printers.

# Contents

1	Pin configuration .....	3
2	Maximum ratings .....	5
3	Electrical characteristics .....	6
4	Application circuit .....	9
5	Timing diagrams .....	10
6	Package mechanical data .....	12
7	Revision history .....	15

Obsolete Product(s) - Obsolete Product(s)  
Obsolete Product(s) - Obsolete Product(s)

# 1 Pin configuration

Figure 1. Pin configuration (bottom view, bumps side)

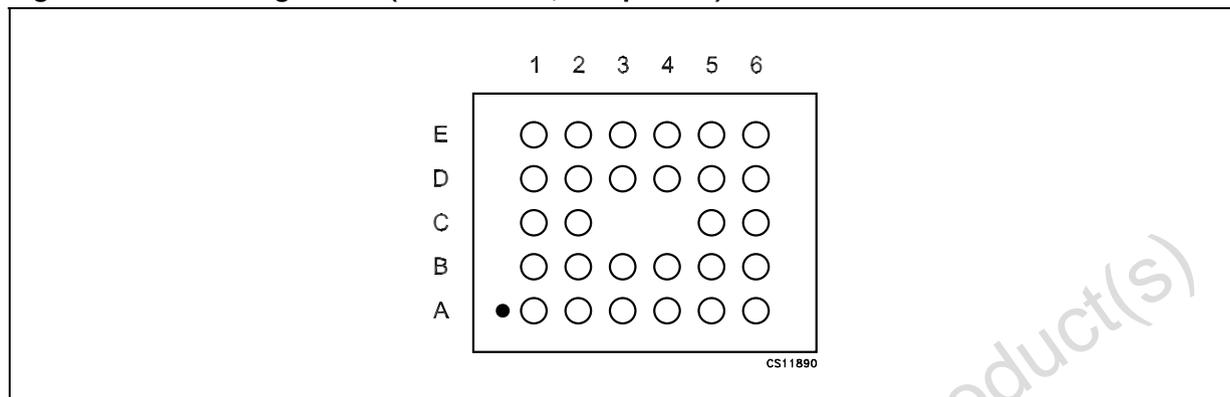


Table 2. Pin description

Pin n°	Symbol	Name and function
A1	R2 <sub>IN</sub>	Second receiver input voltage
A2	R3 <sub>IN</sub>	Third receiver input voltage
A3	R4 <sub>IN</sub>	Fourth receiver input voltage
A4	R5 <sub>IN</sub>	Fifth receiver input voltage
A5	T1 <sub>OUT</sub>	First transmitter output voltage
A6	T2 <sub>OUT</sub>	Second transmitter output voltage
B1	V-	-5.5 V generated by the charge pump
B2	R1 <sub>IN</sub>	First receiver input voltage
B3	T3 <sub>OUT</sub>	Third transmitter output voltage
E4	T3 <sub>IN</sub>	Third transmitter input voltage
P5	T1 <sub>IN</sub>	First transmitter input voltage
B6	T2 <sub>IN</sub>	Second transmitter input voltage
C1	C <sub>2+</sub>	Positive terminal of inverting charge pump capacitor
C2	C <sub>2-</sub>	Negative terminal of inverting charge pump capacitor
C5	R4 <sub>OUT</sub>	Fourth receiver output voltage
C6	R5 <sub>OUT</sub>	Fifth receiver output voltage
D1	C <sub>1+</sub>	Positive terminal of voltage- charge pump capacitor
D2	V+	5.5 V generated by the charge pump
D3	V <sub>CC</sub>	Supply voltage
D4	FORCEON	Drive high to override automatic circuitry keeping transmitters on (FORCEOFF must be high)
D5	R1 <sub>OUT</sub>	First receiver output voltage
D6	R3 <sub>OUT</sub>	Third receiver output voltage

**Table 2. Pin description (continued)**

Pin n°	Symbol	Name and function
E1	GND	Ground
E2	C <sub>1-</sub>	Negative terminal of voltage- charge pump capacitor
E3	FORCEOFF	Drive low to shut down transmitters and on-board power supply. This overrides all automatic circuitry and FORCEON
E4	INVALID	Output of the valid signal detector. Indicates if a valid RS-232 level is present on receiver inputs logic "1"
E5	R2 <sub>OUTB</sub>	Non-inverting complementary receiver output, always active for wake-up
E6	R2 <sub>OUT</sub>	Second receiver output voltage

**Table 3. Invalid truth table**

RS-232 signal present at any receiver input	INVALID output
YES	H
NO	L

**Table 4. Output control truth table**

FORCE ON	FORCE OFF	Valid receiver level	Operation status	T <sub>OUT</sub>	R <sub>OUT</sub>	R2 <sub>OUTB</sub>
X	0	X	Shutdown (FORCEOFF)	HIGH Z	HIGH Z	ACTIVE
1	1	X	Normal operating (FORCEON)	ACTIVE	ACTIVE	ACTIVE
0	1	YES	Normal operating (Auto-power-down)	ACTIVE	ACTIVE	ACTIVE
0	1	NO	Shutdown (Auto-power-down)	HIGH Z	ACTIVE	ACTIVE

## 2 Maximum ratings

**Table 5. Absolute maximum ratings**

Symbol	Parameter	Value	Unit
$V_{CC}$	Supply voltage	-0.3 to 6	V
V+	Doubled voltage terminal	$(V_{CC} - 0.3)$ to 7	V
V-	Inverted voltage terminal	0.3 to -7	V
$V+ +  V- $		13	V
FORCEON, FORCEOFF, $T_{IN}$	Input voltage	-0.3 to 6	V
$R_{IN}$	Receiver input voltage range	$\pm 25$	V
$T_{OUT}$	Transmitter output voltage range	$\pm 13.2$	V
$R_{OUT}$ $R_{OUTB}$ INVALID	Receiver output voltage range	-0.3 to $(V_{CC} + 0.3)$	V
$t_{SHORT}$	Short circuit duration on $T_{OUT}$ (one at a time)	Continuous	
$T_{STG}$	Storage temperature range	-65 to 150	°C

*Note:* Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

**Table 6. ESD performance: transmitter outputs, receiver inputs**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
ESD	ESD protection voltage	Human body model	$\pm 15$			kV
ESD	ESD protection voltage	IEC 1000-4-2 (contact discharge)	$\pm 8$			kV

### 3 Electrical characteristics

**Table 7. Electrical characteristics**

(C1 - C4 = 0.1  $\mu$ F,  $V_{CC}$  = 2.3 V to 5.5 V,  $T_A$  = -40 to 85  $^{\circ}$ C, unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^{\circ}$ C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_{ASHDN}$	Supply current auto-power-down	$\overline{FORCEOFF} = GND, \overline{FORCEON} = V_{CC}$ All R_IN open or grounded		1	10	$\mu$ A
$I_{SUPPLY}$	Supply current	$\overline{FORCEON} = \overline{FORCEOFF} = V_{CC}$		0.3	1	mA
$I_{SHDN}$	Shutdown supply current	$\overline{FORCEOFF} = GND$		1	10	$\mu$ A

**Table 8. Logic input electrical characteristics**

(C1 - C4 = 0.1  $\mu$ F,  $V_{CC}$  = 2.3 V to 5.5 V,  $T_A$  = -40 to 85  $^{\circ}$ C, unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^{\circ}$ C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{TIL}$	Input logic threshold low	T-IN, $\overline{FORCEON}, \overline{FORCEOFF}$ $V_{CC} = 3.0$ V $V_{CC} = 2.3$ V			0.8 0.5	V V
$V_{TIH}$	Input logic threshold high	T-IN, $\overline{FORCEON}, \overline{FORCEOFF}$ $V_{CC} = 3.0$ V $V_{CC} = 2.3$ V	2 1.4			V V
$V_{THYS}$	Transmitter input hysteresis			0.4		V
$I_{IL}$	Input leakage current	T-IN, $\overline{FORCEON}, \overline{FORCEOFF}$		$\pm 0.01$	$\pm 1.0$	$\mu$ A

**Table 9. Receiver outputs electrical characteristics**

(C1 - C4 = 0.1  $\mu$ F,  $V_{CC}$  = 2.3 V to 5.5 V,  $T_A$  = -40 to 85  $^{\circ}$ C, unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^{\circ}$ C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_{OL}$	Output leakage current	Receiver disabled		$\pm 0.05$	$\pm 10$	$\mu$ A
$V_{OL}$	Output voltage low	$I_{OUT} = 1.6$ mA			0.4	V
$V_{OH}$	Output voltage high	$I_{OUT} = -1$ mA	$V_{CC}-0.6$	$V_{CC}-0.1$		V

**Table 10. Auto-power-down electrical characteristics**

(C1 - C4 = 0.1  $\mu$ F,  $V_{CC}$  = 2.3 V to 5.5 V,  $T_A$  = -40 to 85  $^{\circ}$ C, unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^{\circ}$ C, FORCEON = GND, FORCEOFF =  $V_{CC}$ )

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{RITE}$	Receiver input threshold to INVALID output voltage HIGH (Figure 3)	Positive threshold			2.7	V
		Negative threshold	2.7			V
$V_{RITD}$	Receiver input threshold to INVALID output voltage LOW (Figure 3)		-0.3		0.3	V
$V_{IOL}$	INVALID output voltage LOW	$I_{OUT} = 1.6$ mA			2.4	V
$V_{IOH}$	INVALID output voltage HIGH	$I_{OUT} = -1$ mA	$V_{CC}-0.6$			V
$t_{WU}$	Receiver or transmitter edge transmitter enabled (Figure 3)			100		$\mu$ s
$t_{INVH}$	Receiver positive or negative threshold to INVALID HIGH (Figure 3)			0.2		$\mu$ s
$t_{INVL}$	Receiver positive or negative threshold to INVALID LOW (Figure 3)			30		$\mu$ s

**Table 11. Transmitter electrical characteristics**

(C1 - C4 = 0.1  $\mu$ F,  $V_{CC}$  = 2.3 V to 5.5 V,  $T_A$  = -40 to 85  $^{\circ}$ C, unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^{\circ}$ C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{TCOUT}$	Output voltage swing	All transmitter outputs are loaded with 3 k $\Omega$ to GND $V_{CC} = 3.0$ V $V_{CC} = 2.3$ V	$\pm 3.7$	$\pm 4.4$ $\pm 3.9$		V
$R_{OUT}$	Output resistance	$V_{CC} = V_+ = V_- = 0$ V, $V_{OUT} = \pm 2$ V	300	10M		$\Omega$
$I_{SC}$	Output short circuit current	$V_{CC} = 3.3$ V		$\pm 40$	$\pm 60$	mA
$I_L$	Output leakage current	$V_{CC} = 0$ to 5.5V, transmitter output = $\pm 12$ V, transmitter disabled			$\pm 25$	mA
$V_{OT}$	Transmitter output voltage	T1IN = T2IN = GND, T3IN = $V_{CC}$ T3OUT loaded with 3 k $\Omega$ to GND T1OUT and T2OUT loaded with 2.5 mA each	$\pm 3.7$			V

**Table 12. Receiver electrical characteristics**

(C1 - C4 = 0.1  $\mu$ F,  $V_{CC}$  = 2.3 V to 5.5 V,  $T_A$  = -40 to 85  $^{\circ}$ C, unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^{\circ}$ C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{RIN}$	Receiver input voltage operating range		-25		25	V
$V_{RIL}$	RS-232 Input threshold low	$T_A$ = 25 $^{\circ}$ C, $V_{CC}$ = 3.0 V $T_A$ = 25 $^{\circ}$ C, $V_{CC}$ = 2.3 V	0.6 0.4	1.0 0.8		V
$V_{RIH}$	RS-232 Input threshold high	$T_A$ = 25 $^{\circ}$ C, $V_{CC}$ = 3.0 V $T_A$ = 25 $^{\circ}$ C, $V_{CC}$ = 2.3 V		1.4 1.2	2.4 2.0	V
$V_{RIHYS}$	Input hysteresis			0.5		V
$R_{RIN}$	Input resistance	$T_A$ = 25 $^{\circ}$ C	3	5	7	k $\Omega$

**Table 13. Timing characteristics**

(C1 - C4 = 0.1  $\mu$ F,  $V_{CC}$  = 2.3 V to 3 V,  $T_A$  = -40 to 85  $^{\circ}$ C, unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^{\circ}$ C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$D_R$	Maximum data rate	$R_L$ = 3 k $\Omega$ , $C_L$ = 1000 pF one transmitter switching	250			kbps
$t_{PHL}$ $t_{PLH}$	Receiver propagation delay	$R_{IN}$ to $R_{OUT}$ , $C_L$ = 150 pF		0.15		$\mu$ s
$t_{T\_SKEW}$	Transmitter skew			60		ns
$t_{R\_SKEW}$	Receiver skew			120		ns
$S_{RT}$	Transition slew rate	$T_A$ = 25 $^{\circ}$ C $R_L$ = 3k to 7k $\Omega$ , $V_{CC}$ = 3 V measured from +3 V to -3 V or -3 V to +3 V $C_L$ = 150 pF to 1000 pF	4		30	V/ $\mu$ s

# 4 Application circuit

Figure 2. Application circuit

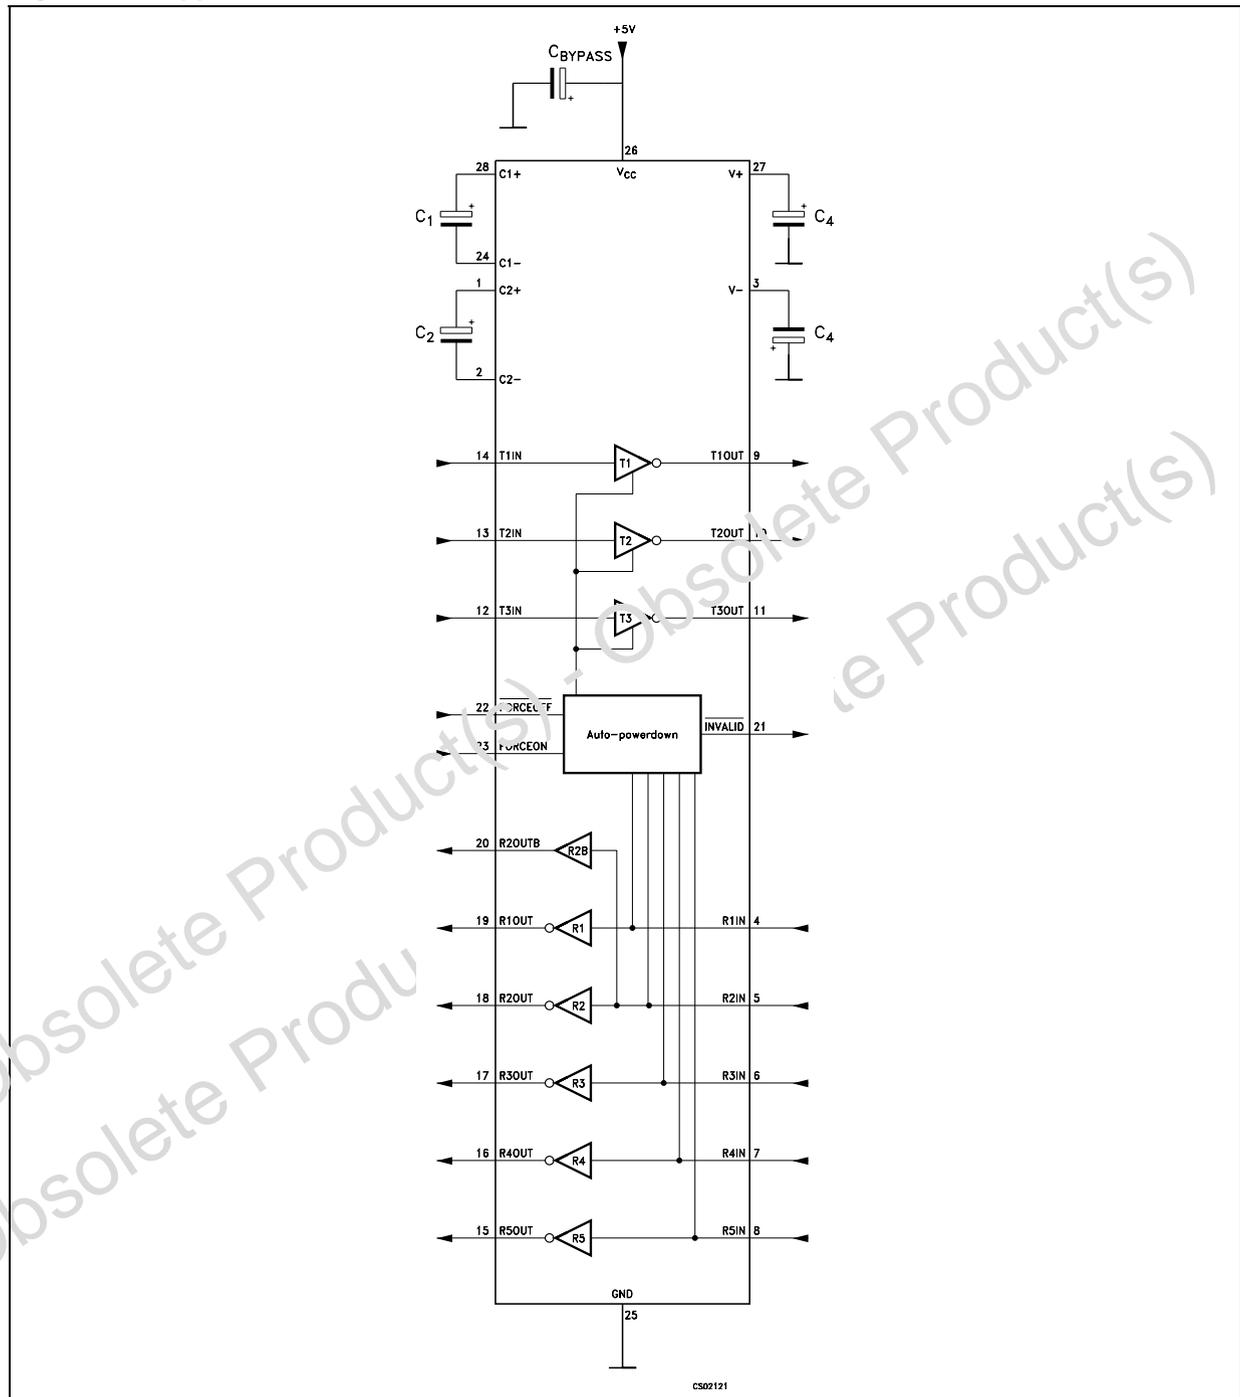


Table 14. Required minimum capacitance value ( $\mu\text{F}$ )

$V_{CC}$ (V)	$C_1$	$C_2, C_3, C_4, C_{BYPASS}$
2.3 to 3.0	0.1	0.1

## 5 Timing diagrams

Figure 3. Auto-power-down input levels

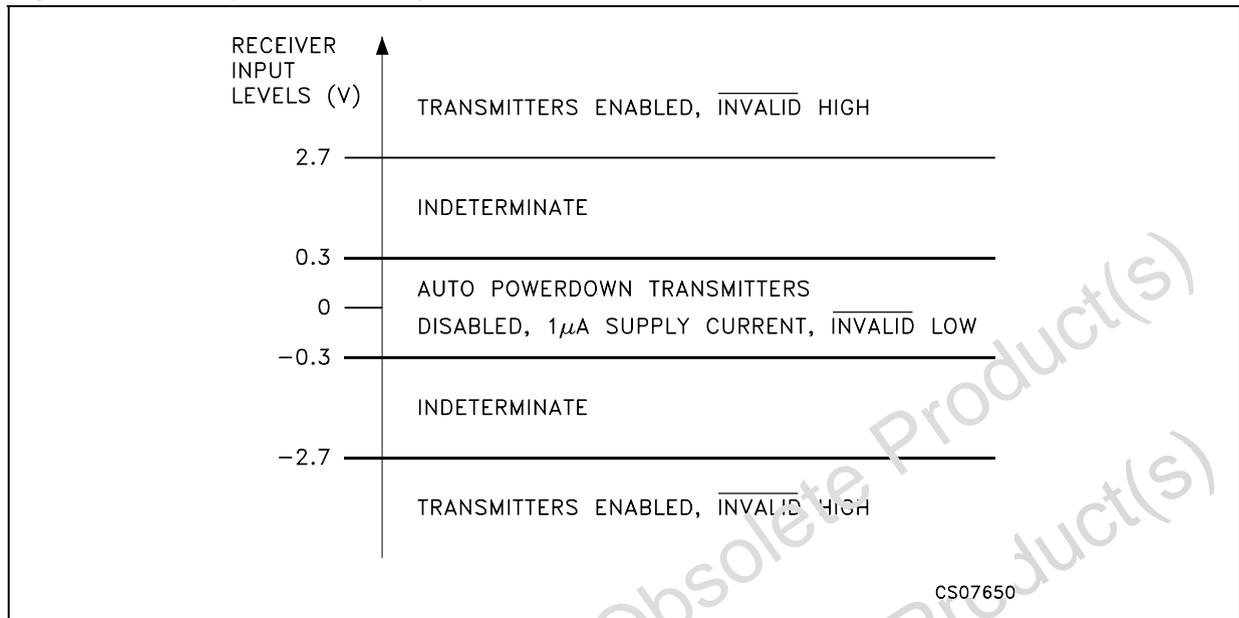


Figure 4. Auto-power-down input timing


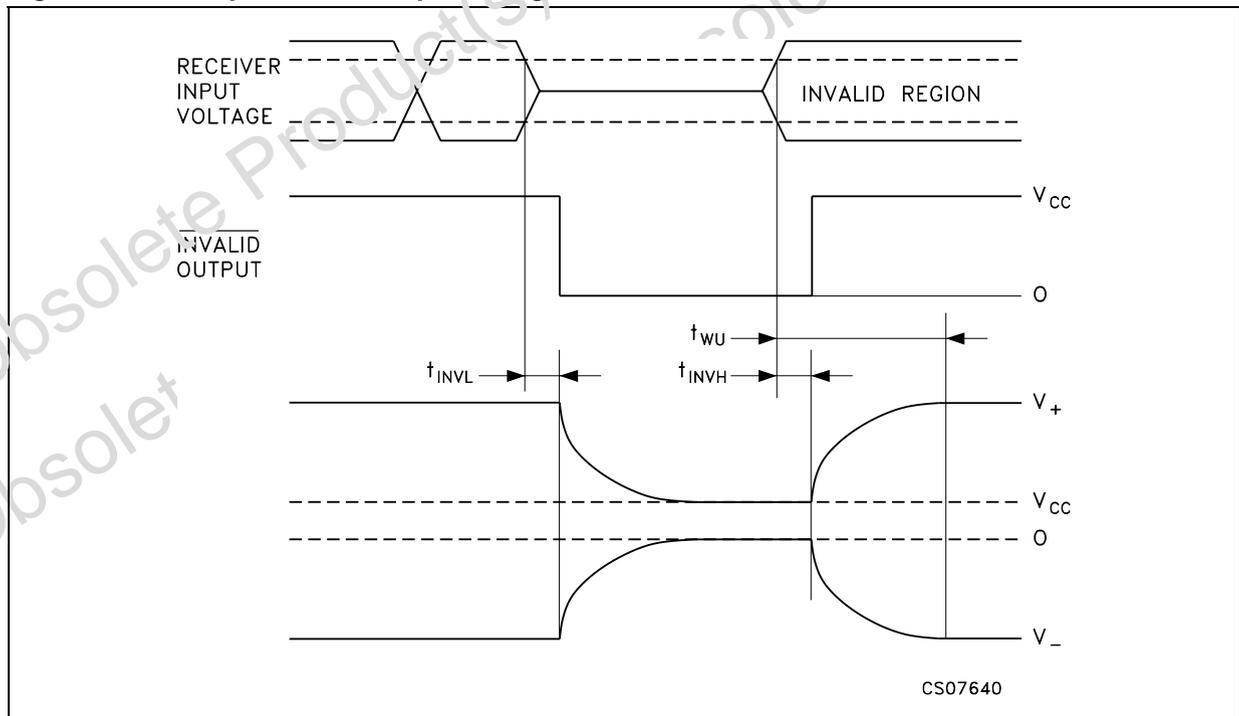


Figure 5. Data rate

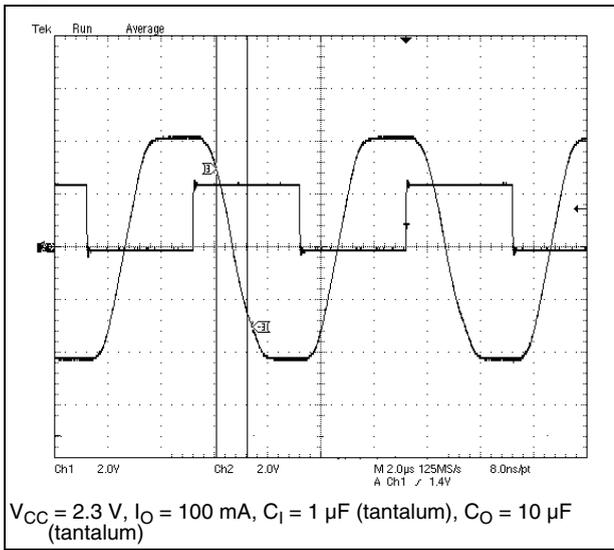

Obsolete Product(s) - Obsolete Product(s)  
Obsolete Product(s) - Obsolete Product(s)


## 6 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

Obsolete Product(s) - Obsolete Product(s)  
Obsolete Product(s) - Obsolete Product(s)


**Flip-Chip28 mechanical data**

Dim.	mm.			mils.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.83		0.95	32.7		37.4
A1		0.24			9.4	
A2		0.65			25.6	
b	0.25	0.30	0.35	9.8	11.8	13.9
D	3.97		4.17	156.3		164.2
D1		2.5			98.4	
E	2.47		2.67	97.2		105.1
E1		2			78.7	
e	0.45		0.55	17.7		21.7
f	0.23		0.34	9.1		13.4
f1	0.80		0.91	31.5		31.8

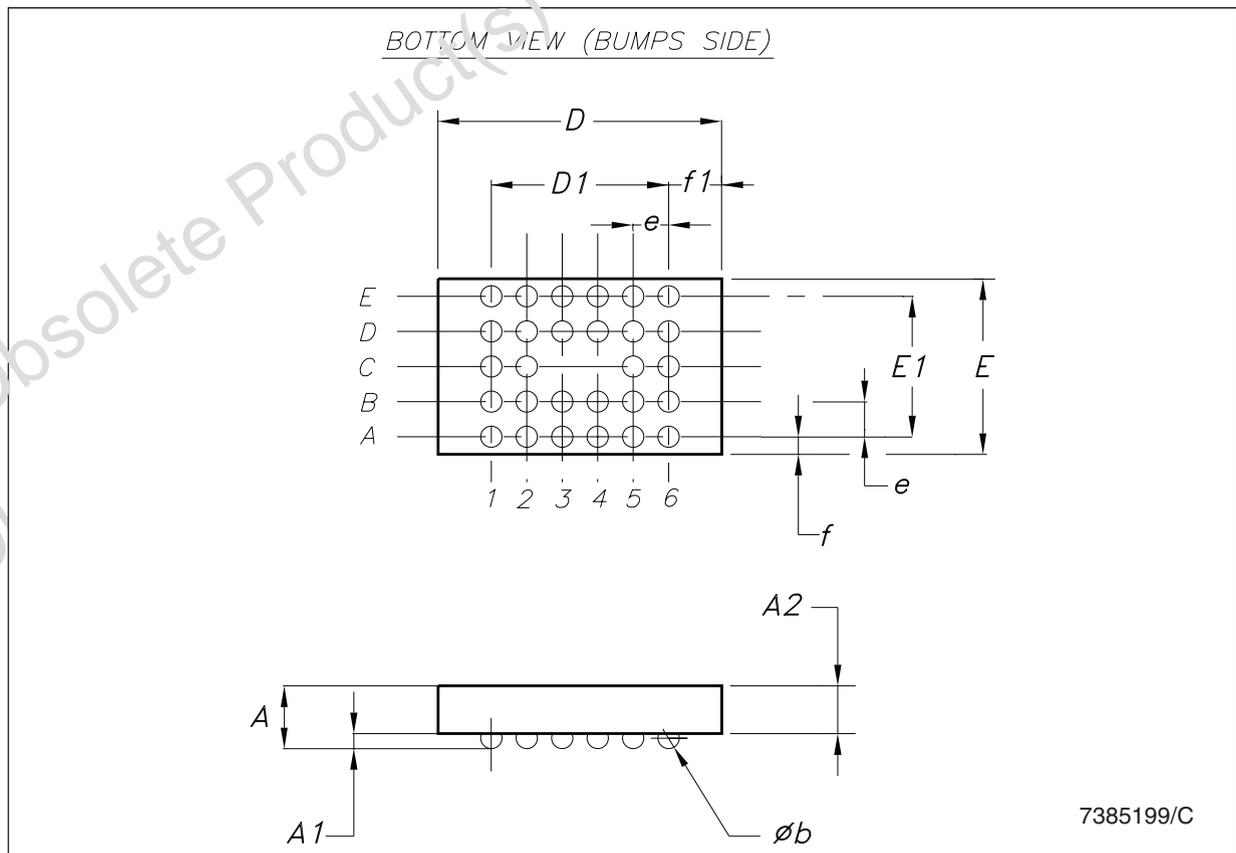

**Tape & reel Flip-Chip28 mechanical data**

Dim.	mm.			inch.		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			18.4			0.882
Ao	2.6		2.8	0.102		0.110
Bo	4.1		4.3	0.161		0.169
Ko	1.1		1.3	0.043		0.051
Po	3.9		4.1	0.153		0.161
P	3.9		4.1	0.153		0.161

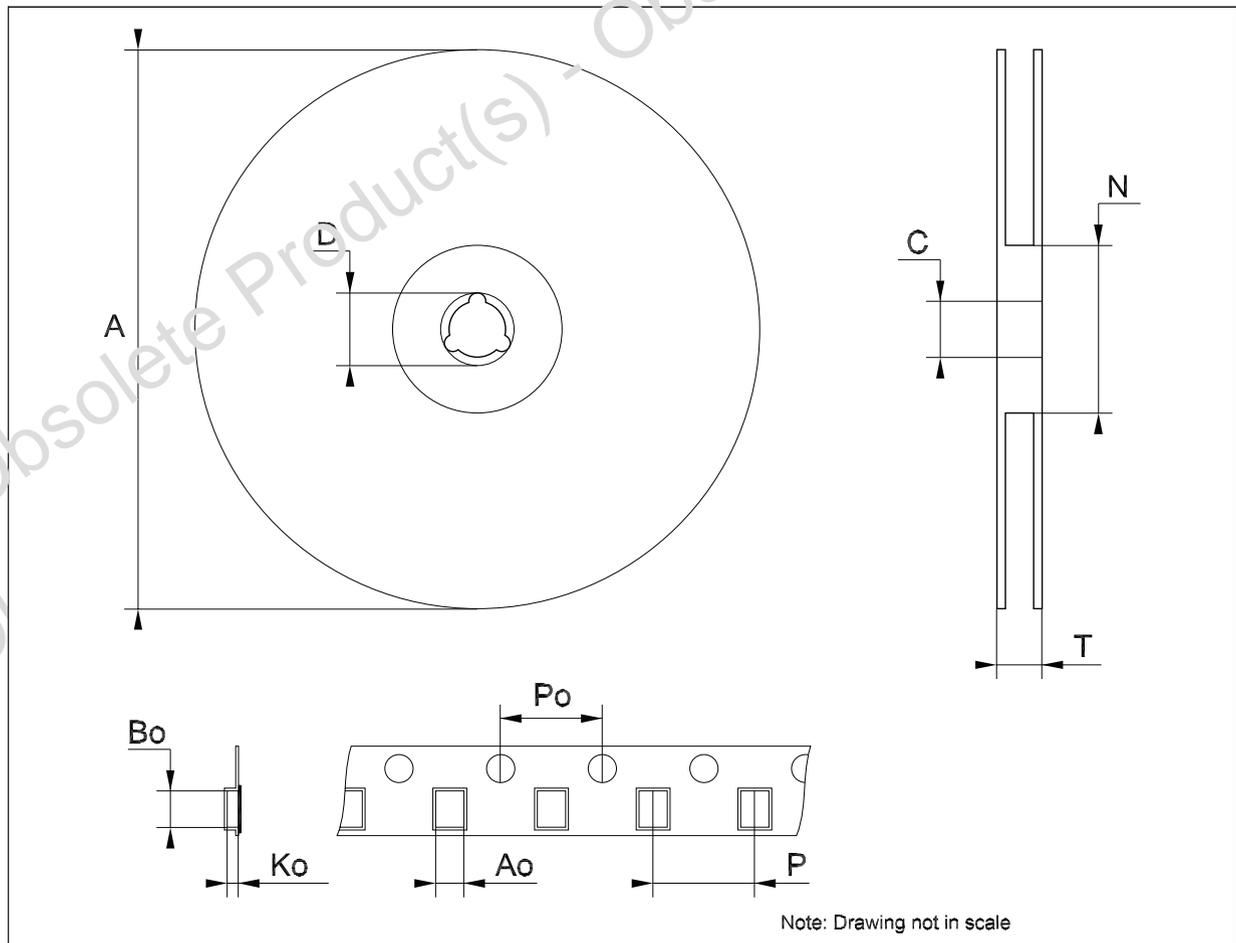

## 7 Revision history

Table 15. Document revision history

Date	Revision	Changes
02-May-2005	2	Removed: packages SOP, SSOP and TSSOP.
21-Jan-2009	3	Modified <a href="#">Table 1 on page 1</a> .

Obsolete Product(s) - Obsolete Product(s)  
Obsolete Product(s) - Obsolete Product(s)

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)