
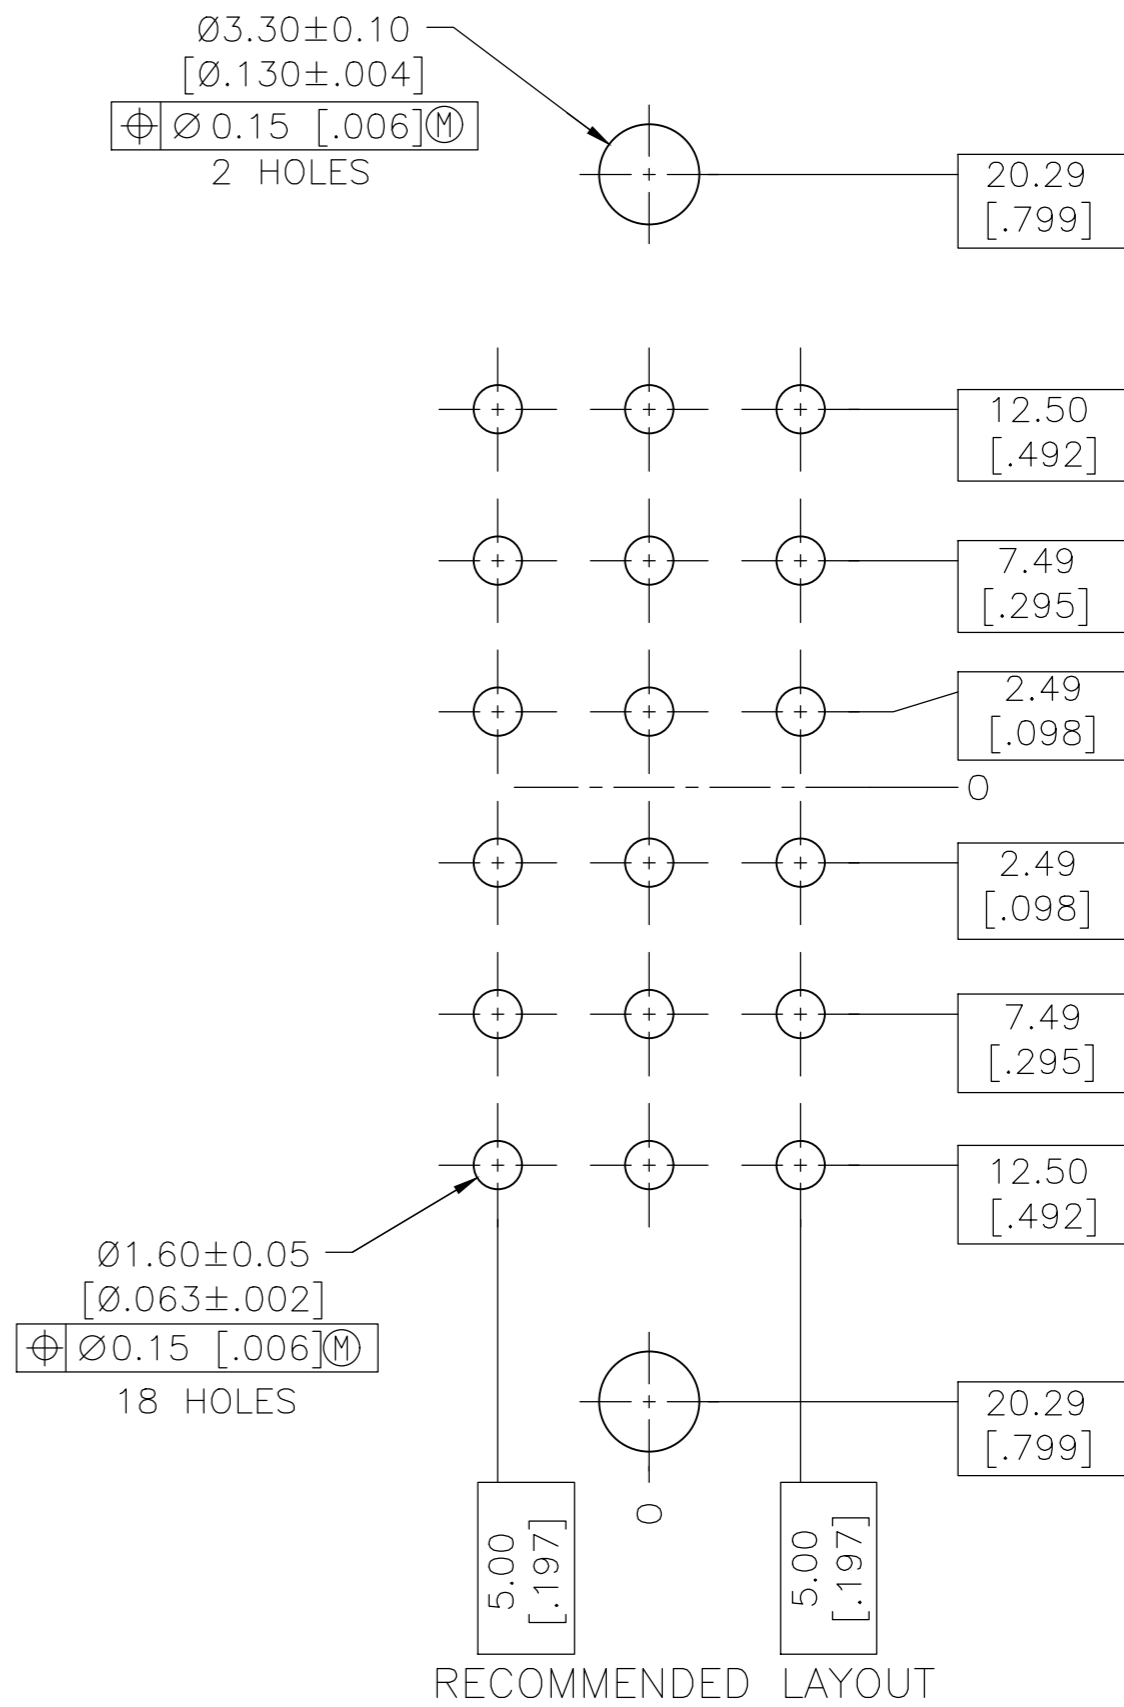
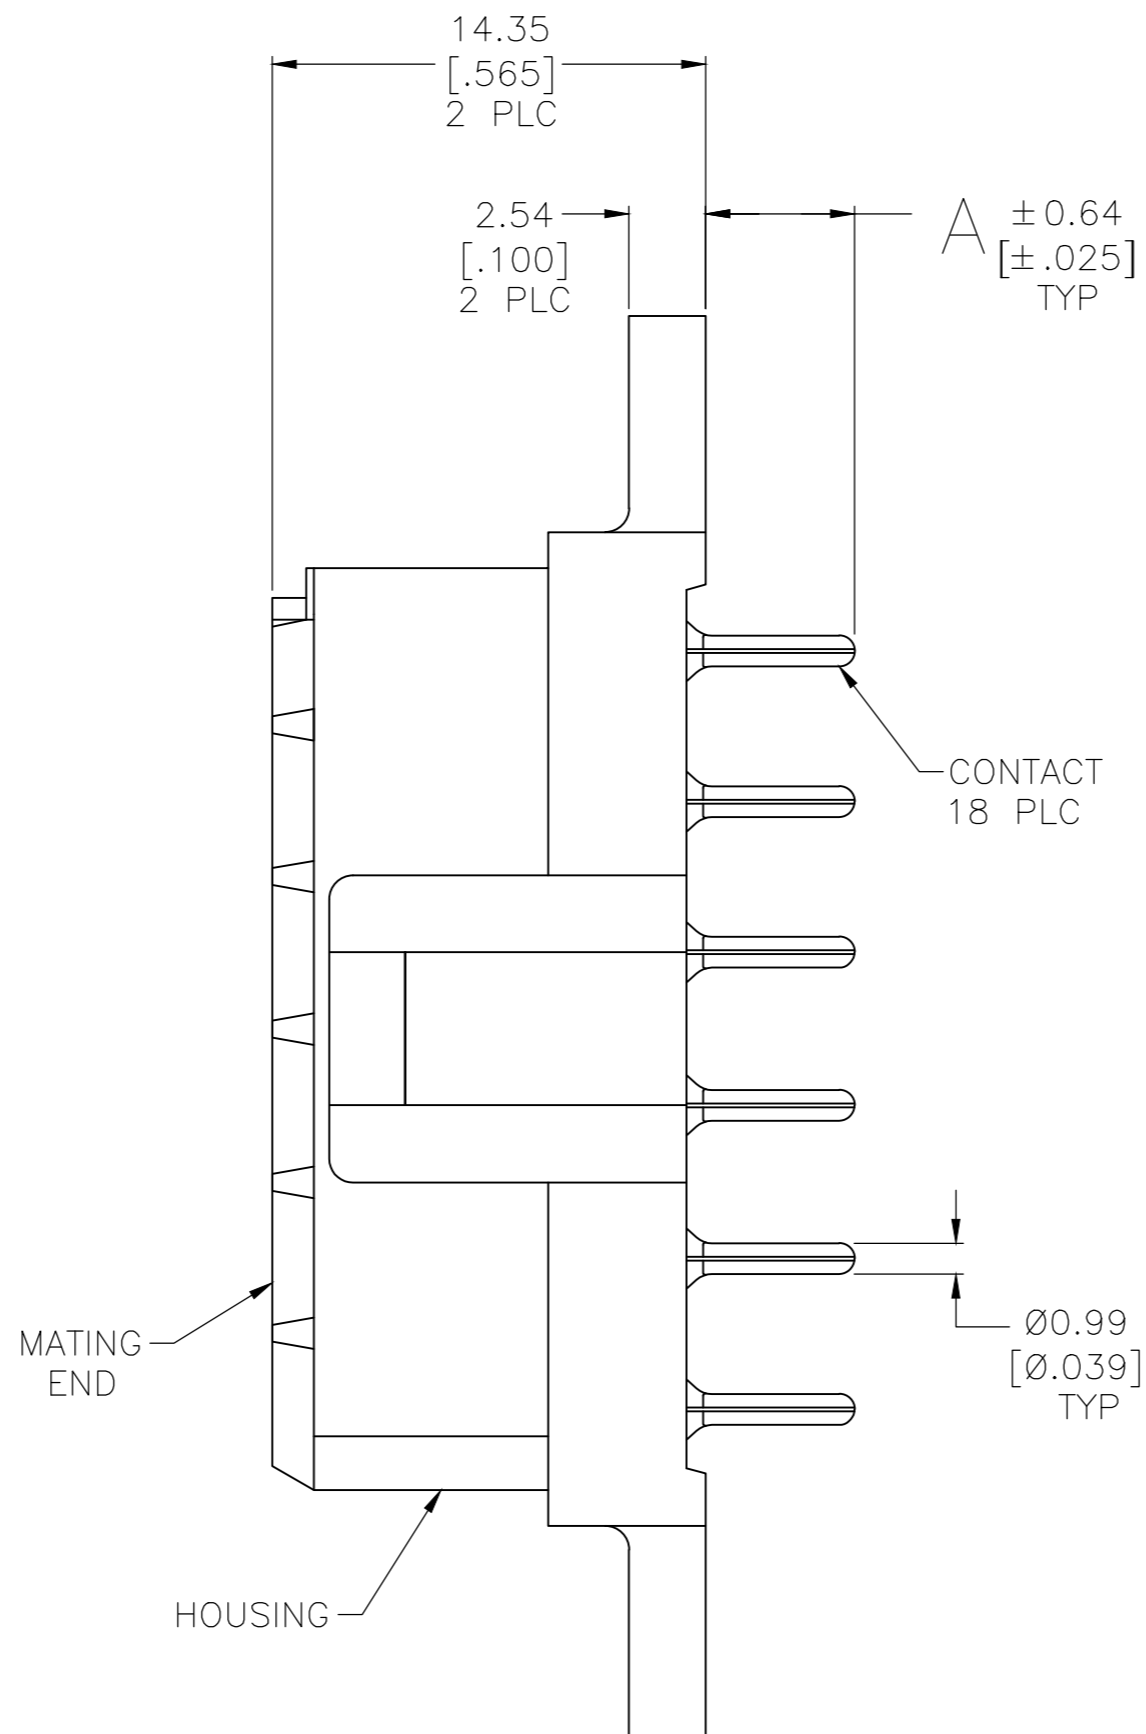


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
R		REVISED PER ECO-18-000437	17JAN2018	RS	MZ
S		REVISED PER ECO-20-0020461	14FEB2020	RK	MZ

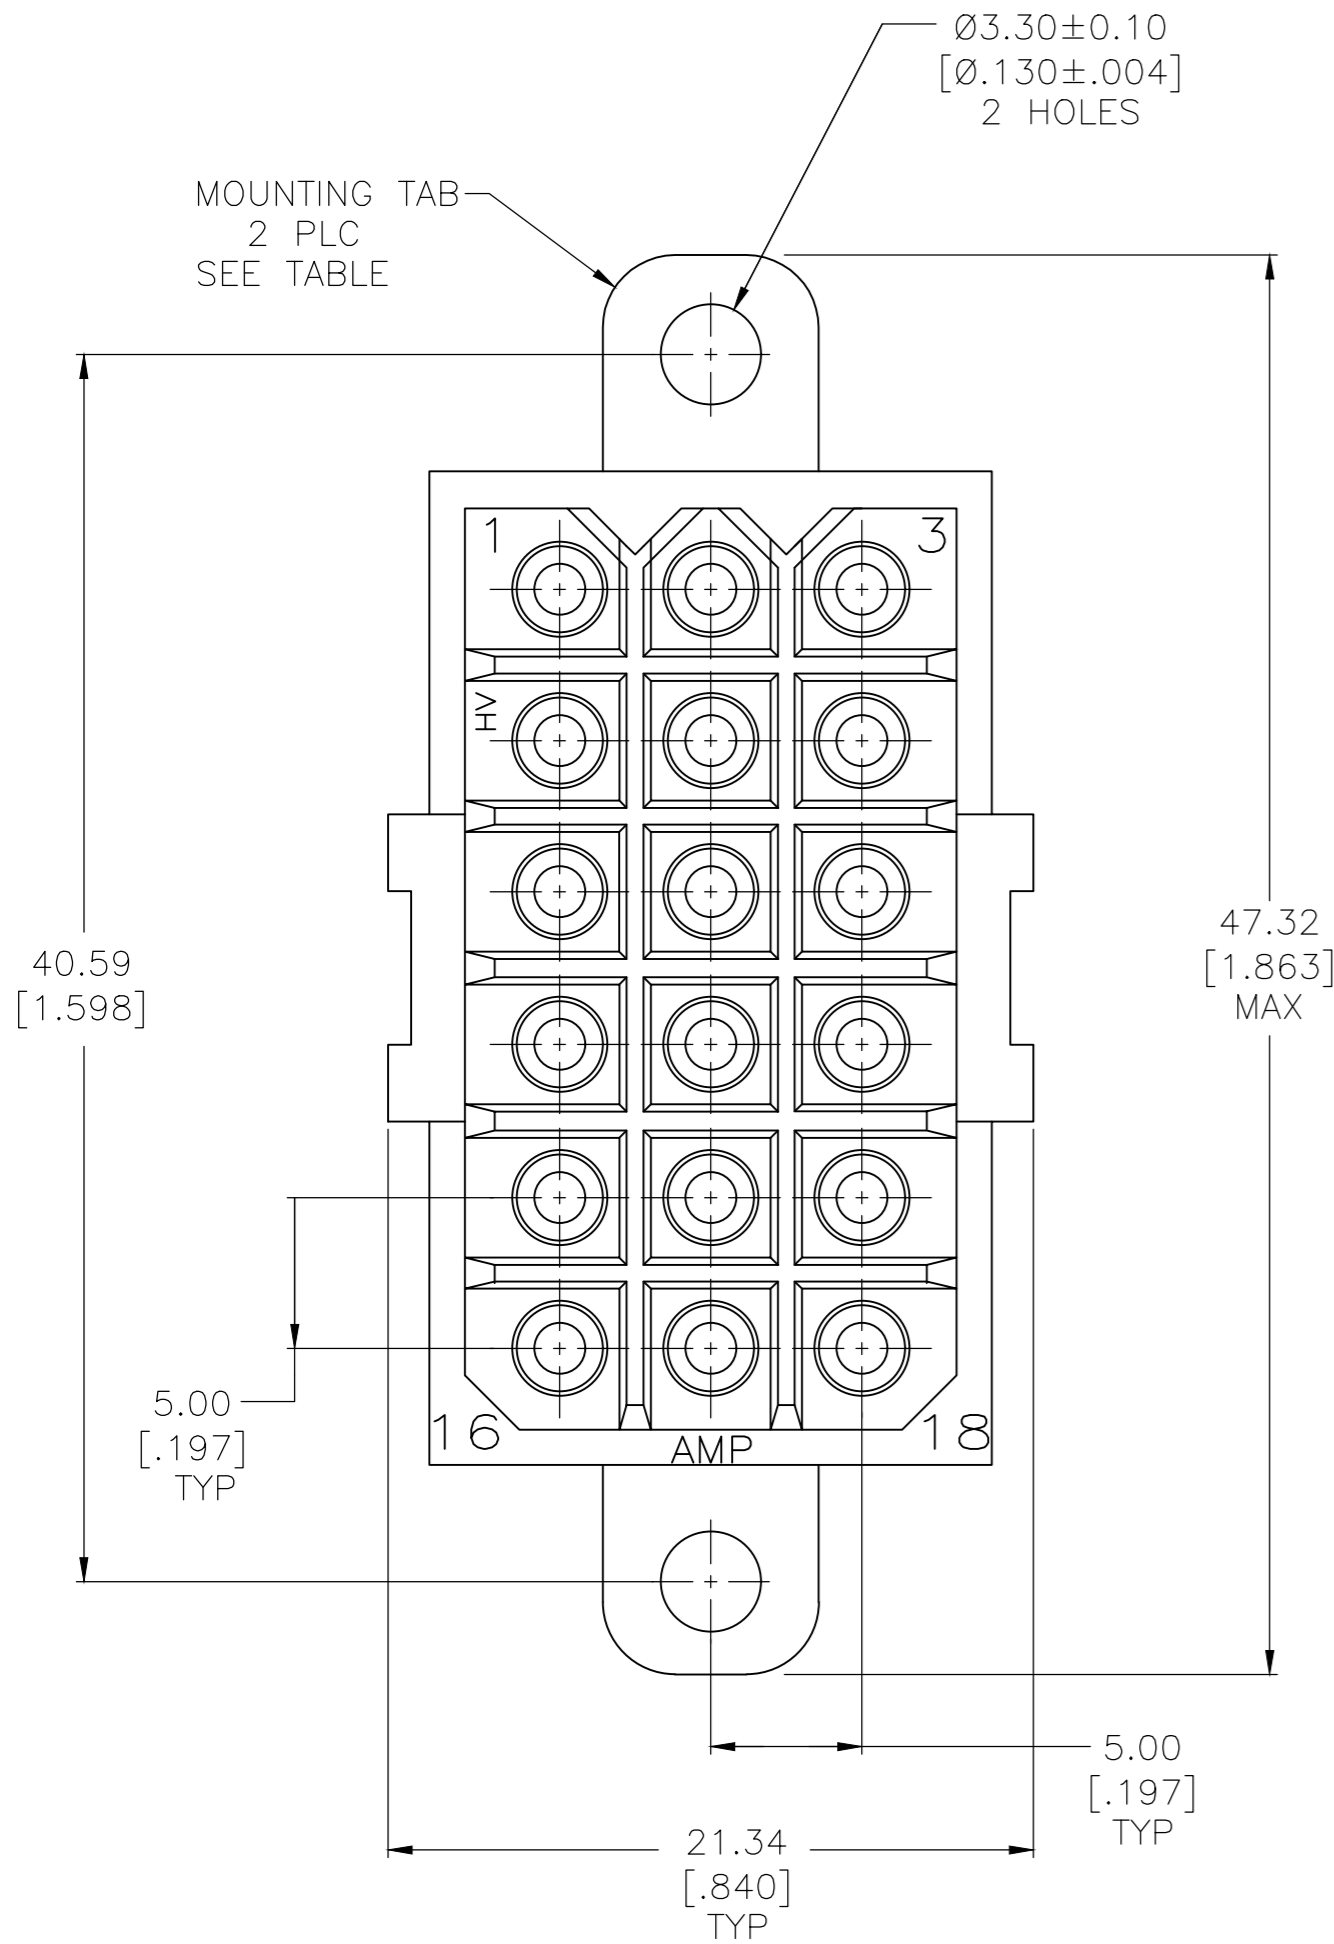

- 1 HOUSING MATERIAL: PA66, BLACK, UL 94 V-0 RATED.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 3.81µm [.000150] MIN TIN-LEAD OVER 1.27µm [.000050] MIN NICKEL.
- 4 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81µm [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 5 3.81µm [.000150] MIN TIN OVER 1.27µm [.000050] MIN NICKEL.
- 6 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81µm [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 7 PRELIMINARY PART NUMBER.

OBSOLETE	3.50 [.137]	6	YES	1-207530-1
OBSOLETE		6	NO	1-207530-0
		6	YES	207530-9
		5	NO	207530-8
		5	YES	207530-7
OBSOLETE	4.60 [.181]	4	NO	207530-4
OBSOLETE		4	YES	207530-3
OBSOLETE		3	NO	207530-2
OBSOLETE		3	YES	207530-1
	DIM A	CONTACT FINISH	MOUNTING TABS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03/19/92	TE TE Connectivity	
		L.SIPE	3-25-92		
DIMENSIONS: mm [INCHES]		CHK	R.STONE	NAME SOCKET HEADER ASSEMBLY, 18 POSITION, METRIMATE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	A.TRAVIS		
0 PLC ± -		PRODUCT SPEC	108-10033	SIZE CAGE CODE DRAWING NO RESTRICTED TO A2 00779 C=207530	
1 PLC ± -		APPLICATION SPEC	-		
2 PLC ± 0.25 [.010]		WEIGHT	-	SCALE 4:1 SHEET 1 OF 1 REV S	
3 PLC ± -		CUSTOMER DRAWING	-		
4 PLC ± -					
ANGLES ± -					
FINISH					
CONTACT: SEE TABLE					