




MQS

TE Internal #: 2-966658-2

PCB Mount Header, Vertical, Wire-to-Board, 32 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Signal, Blue, MQS

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles

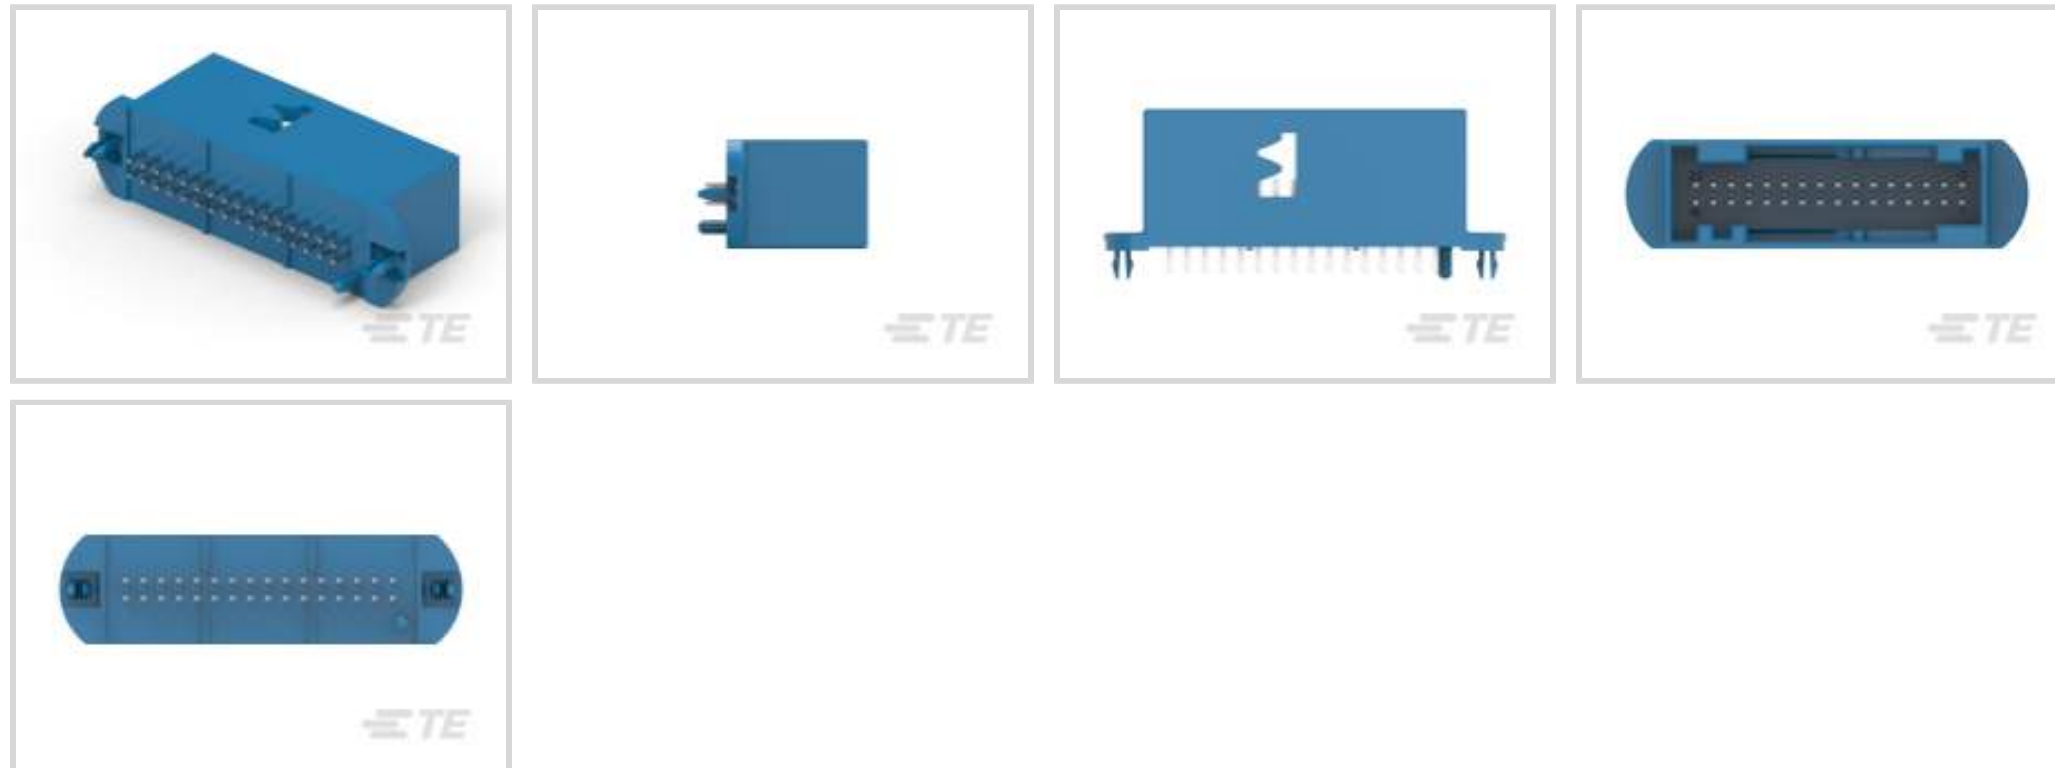

Connector System: **Wire-to-Board**

Number of Positions: **32**

Centerline (Pitch): **2.54 mm [.1 in]**

Sealable: **No**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Sections	1
Number of Signal Positions	32
Number of Positions	32
PCB Mount Orientation	Vertical
Number of Rows	2

Electrical Characteristics



Nominal Voltage Architecture	12 V
------------------------------	------

Body Features

Primary Product Color	Blue
-----------------------	------

Connector & Keying Code	C-D
-------------------------	-----

Contact Features

Contact Size	.63mm
--------------	-------

Contact Type	Tab
--------------	-----

Mating Tab Width	.63 mm[.024 in]
------------------	-----------------

Mating Tab Thickness	.63 mm[.024 in]
----------------------	-----------------

Contact Mating Area Plating Material	Tin
--------------------------------------	-----

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

Mechanical Attachment

Mating Retention	With
------------------	------

Mating Alignment	With
------------------	------

PCB Mount Retention	With
---------------------	------

PCB Mount Retention Type	Boardlock
--------------------------	-----------

Mating Retention Type	Locking Interface
-----------------------	-------------------

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
--------------------	----------------

Dimensions

Connector Length	57.6 mm[2.26 in]
------------------	------------------

Connector Width	15.6 mm[.614 in]
-----------------	------------------

Profile Height from PCB	20.2 mm[.795 in]
-------------------------	------------------

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C[149 °F][158 °F][167 °F][176 °F][185 °F][194 °F][212 °F]
-----------------------------	--

Operating Temperature Range	-30 – 100 °C[-22 – 212 °F]
-----------------------------	----------------------------

Operation/Application

Shielded	No
----------	----

Circuit Application	Signal
---------------------	--------



Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 1989718-1 COVER ASSY MQS HSG 2X16 POSN.</p>	 <p>TE Part # 966661-3 TSP/MOD STVERB2X16P</p>	 <p>TE Part # 2141665-2 ELO PIN</p>
--	---	--


Also in the Series | MQS




Automotive Connector Caps & Covers (139)



Automotive Connector EMC Shielding (3)

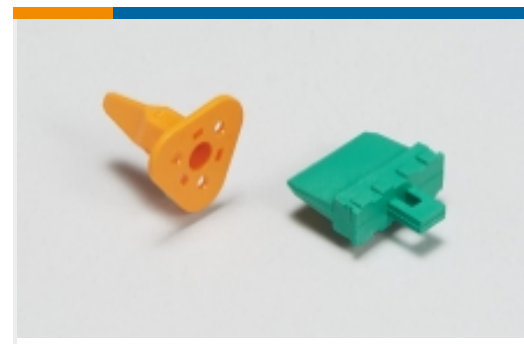

Automotive Connector Locks & Position Assurance(30)

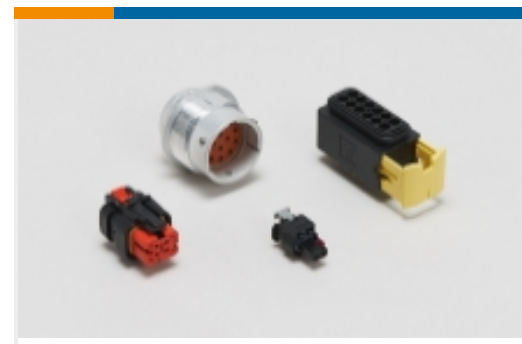

Automotive Housings(506)



Automotive Seals & Cavity Plugs(27)



Automotive Terminals(104)



Insertion & Extraction Tools(42)



Other Automotive Connector Accessories(14)



PCB Headers & Receptacles(214)

Customers Also Bought



TE Part #282526-7
Low & Medium Power Header



TE Part #1-2208265-1
POF,FO PIGTAIL,MOST,FO HEADER, ASSY



TE Part #1-953472-1
Signal Header



TE Part #2137614-1
32P MQS header



TE Part #2196135-1
C LEAF SPRING



TE Part #2296121-1
18P HEADER ASSY



TE Part #2334993-1
12POS,TAB0.64X0.64,HDR ASSY, 90DEG,SLDR



TE Part #2344642-1
32POS,TAB0.63X0.63,HDR ASSY, 90DEG,SLDR

Documents



Product Drawings

[32pos MQS .63 header 180deg](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_2-966658-2_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-966658-2_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-966658-2_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

English