

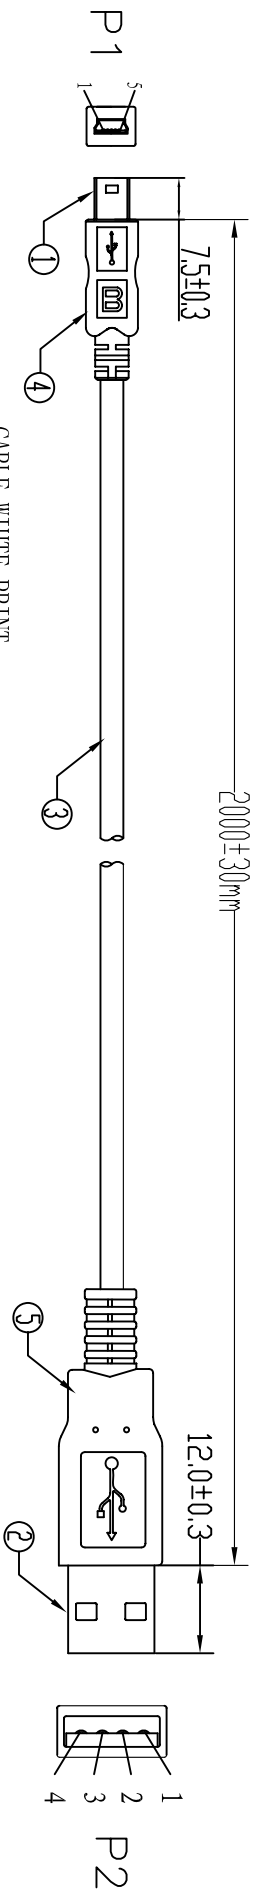


UNIT:mm

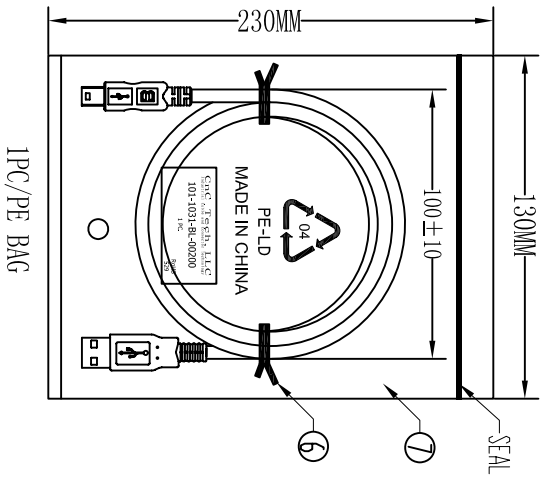

CABLE WHITE PRINT  
 USB CABLE E189529 **RU** AWM 2725 VW-1 30V 80°C 28AWG/1PR AND 28AWG/2C

PIN ASSIGNMENT:

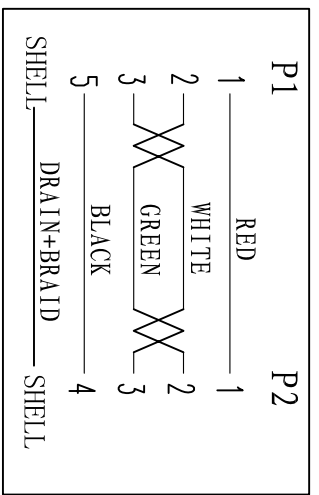

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

|     |            |      |   |
|-----|------------|------|---|
| ⑧   | PE BAG     | 1/10 | CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "10PCS".     |
| ⑦   | PE BAG     | 1    | CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC".       |
| ⑥   | TIE        | 1    | BLACK L=100mm   |
| ⑤   | OUT JACKET | 6g   | BLACK PVC-40P (MOULD NO: WM-40)                                     |
| ④   | OUT JACKET | 6g   | BLACK PVC-40P (MOULD NO: WM-88)                                     |
| ③   | CABLE      | 1    | BLACK USB1.1 UL2725 28#/1P+28#/2C+A&B OD: 3.8mm L=2000±10           |
| ②   | CONN       | 1set | USB A MALE SHELL: NICKEL PIN: G/F 4PCS TYPE INSULATOR COLOR: WHITE  |
| ①   | CONN       | 1set | USB MINI 5P MALE SHELL: NICKEL PIN: G/F 3PCS INSULATOR COLOR: BLACK |
| NO. | NAME       | Q'TY | SPECIFICATION   |

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

|                  |         |            |                   |
|------------------|---------|------------|-------------------|
| DRAWN            | ZHONGHS | DRAWING NO |                   |
| CHECKED          |         | CUSTOMER   |                   |
| APPROVAL         |         | ITEM NO.   | 101-1031-BL-00200 |
| DECIDED          |         | DATE       | 2012-02-16        |
| VERSIONS/EDITION | A/0     | PROJECTION |                   |