


1. Wiring Diagram.

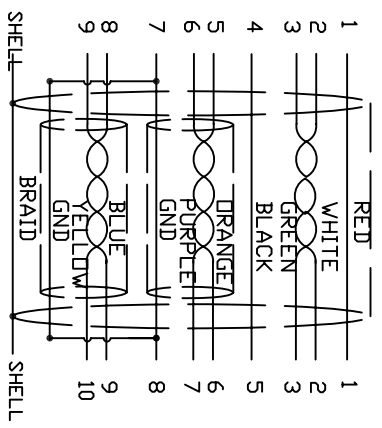

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec
- 3. Each pcs with PE polybag.

NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
5	CONN	USB3.0 MICRO B MALE G/F BLACK	1	P2
4	PVC	45P PVC BLACK OVERMOLD	25g	
3	PE	LLDPE 500026 6201	16g	
2	CONN	USB3.0 A/M G/F BLUE	1	P1
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12 TC) *1P+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	2000mm
DESCRIPTION BILL OF MATERIAL				

INITIAL	RELEASE	DATE
A		2014/08/28

REVISION#	DESCRIPTION	DATE
	P/N: 103-1092-BL-00200	REV A
	TITLE: CABLE USB3.0 AM TO MICRO B MALE	

DRAWN	WENC	DATE	08/24/14
CHECKED	EDWIN	DATE	08/24/14
APPROVAL			

CUSTOMER P/N:	
CUSTOMER:	
SHEET	1 OF 1