



## BW 1290 (12V9Ah)

### SPECIFICATIONS


Nominal Voltage		12 V						
Capacity (25°C)	20HR	9 Ah						
	10HR	7.9 Ah						
	1HR	5.5 Ah						
Dimension	Length	151 ± 1.5mm (5.94inch)						
	Width	65 ± 1mm (2.56inch)						
	Height	94 ± 1mm (3.70inch)						
	Total Height	100 ± 1mm (3.94inch)						
Approx. Weight		2.45kg (5.39lbs) ± 5%						
Terminal type		F1 or F2						
Internal resistance (Fully charged, 25°C)		Approx. 23m Ω						
Capacity affected by temperature (20HR)	40°C	102%						
	25°C	100%						
	0°C	85%						
	-15°C	65%						
Self-discharge (25°C)	3 month	Remaining Capacity: 91%						
	6 month	Remaining Capacity: 82%						
	12 month	Remaining Capacity: 65%						
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)						
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)						
	Charge	-10°C ~ 50°C (14°F ~ 122°F)						
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)						
Float charging voltage(25°C)		13.60 to 13.80V Temperature compensation: -18mV/°C						
Cyclic charging voltage(25°C)		14.50 to 15.00V Temperature compensation: -30mV/°C						
Maximum charging current		2.55A						
Maximum discharge current		127.5A(5 sec.)						
Designed floating life(20°C)		5 years						
Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper



### DIMENSIONS

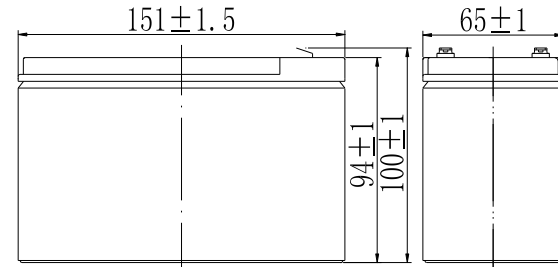

### TERMINAL

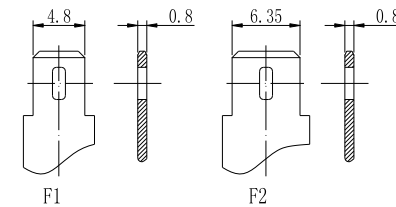

### CONSTRUCTION

### CONSTANT CURRENT DISCHARGE CHARACTERISTICS (A, 25°C)


F.V./TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	32.5	20.6	16.1	9.05	5.57	3.05	2.11	1.74	1.48	0.80	0.431
9.90V	31.5	20.0	15.7	8.87	5.48	3.03	2.09	1.73	1.47	0.80	0.430
10.2V	30.2	19.1	15.1	8.60	5.34	3.00	2.08	1.72	1.46	0.80	0.428
10.5V	28.9	18.3	14.6	8.39	5.24	2.96	2.07	1.71	1.45	0.79	0.425
10.8V	27.3	17.3	13.8	8.08	5.08	2.88	2.00	1.66	1.41	0.78	0.417

CONSTANT POWER DISCHARGE CHARACTERISTICS (WATT, 25°C)


F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	362	232	183	104	64.5	35.6	25.0	20.8	17.7	9.66	5.18
9.90V	351	225	179	102	63.5	35.4	24.9	20.6	17.6	9.62	5.16
10.2V	337	216	172	98.6	61.9	35.1	24.7	20.5	17.5	9.57	5.13
10.5V	323	207	166	96.2	60.7	34.6	24.5	20.3	17.4	9.52	5.10
10.8V	304	195	158	92.6	58.8	33.7	23.8	19.7	16.8	9.33	5.00

Note: The above characteristics data can be obtained within three charge/discharge cycles.


Discharge Characteristics (25°C)

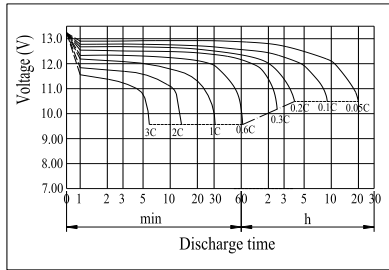


Charging Characteristics (25°C)

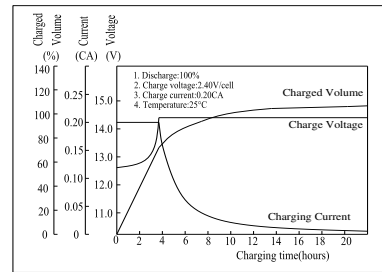


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

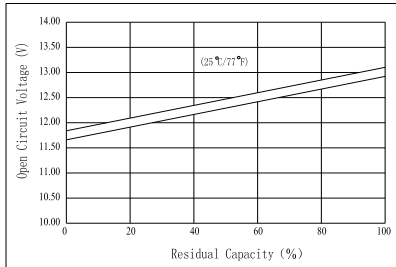


The Relationship for Charging Voltage and Temperature

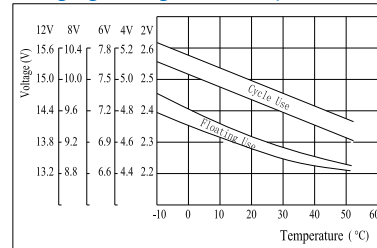


Floating Life on Temperature

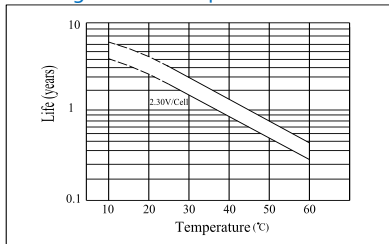

Cycle Life on D.O.D (25°C)

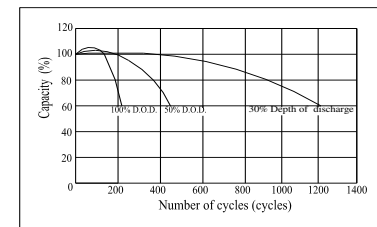

Effect of Temperature on Capacity

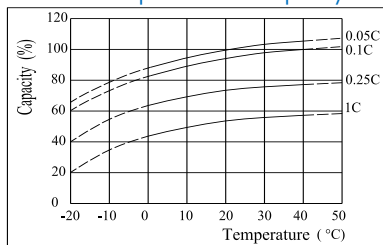

Self-discharge Characteristics

